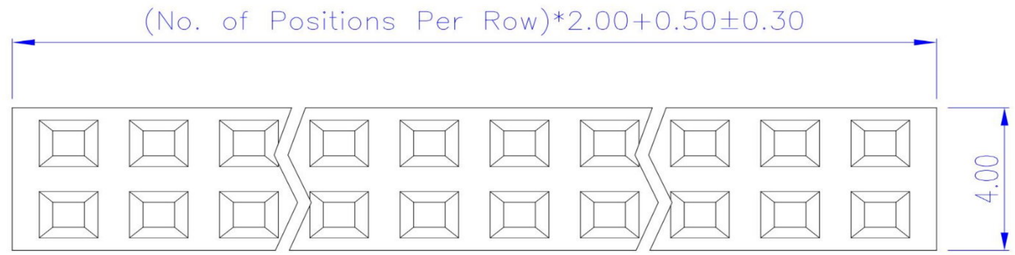

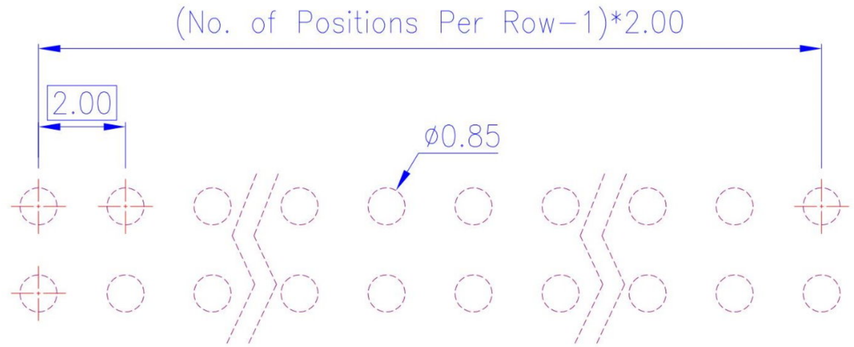

PCB Layout
(Top View)

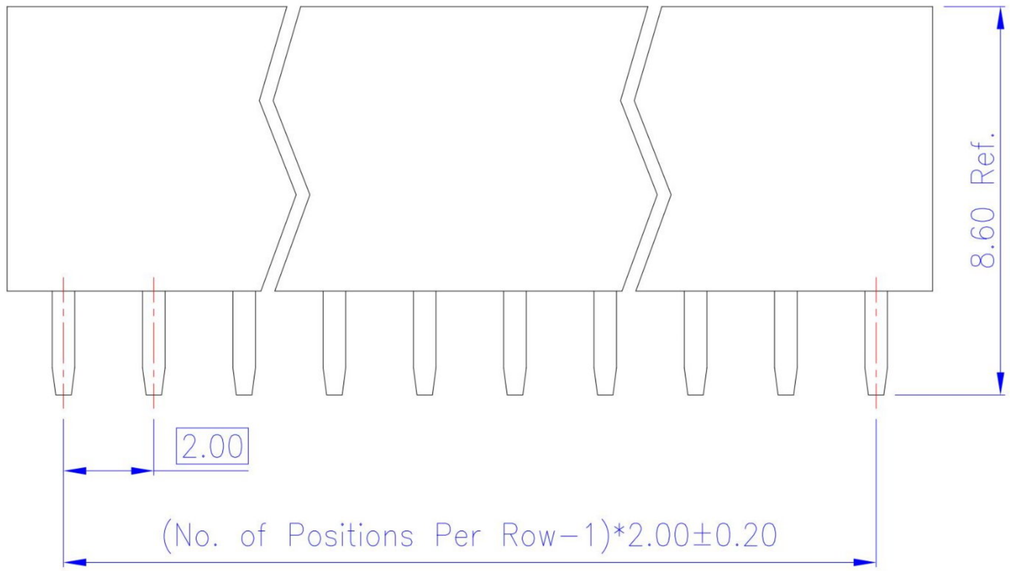

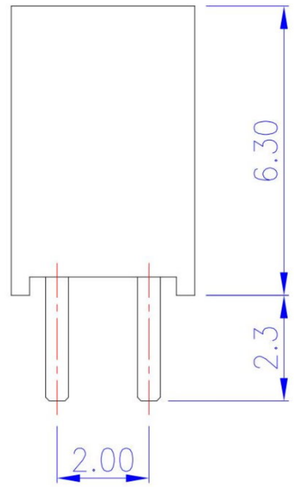

Material and Finish	Electrical Characteristics	Mechanical Characteristics
1. Housing: Nylon 6T (UL94V-0), Black. 2. Terminal: Copper Alloy (t=0.50mm), Gold Plating.	1. Current Rating: 1.0 Amp. Max.. 2. Dielectric Withstand Voltage: 800V AC RMS for 60Seconds. 3. Insulation Resistance: 1000M Ohms Min. at 500V DC. 4. Contact Resistance: 30m Ohms Max.	1. Operating Temperature: -55°C ~ +105°C

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准: Betty	SCALE 比例: 參考	TOLERANCE 容許公差: .0 ± 0.30, .00 ± 0.20, ANG. ± 3°	PART NAME 品名: 2.0mm FEMALE HEADER DUAL ROW H:6.35mm 2XXXP STRAIGHT TYPE GOLD FLASH PLATING MATERIAL:NYLON 6T PIN LENGTH=2.3mm TRAY PACKING ROHS
DWG. 製圖: Betty	UNIT 單位: MM	SIZE. 紙張尺寸: A4	PART NO. 料號: C6808-XXBSGH00L
DATE 制表日: 2012/05/24	PAGE 張數: 1 OF 1	REV. 版次: A	