

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical





Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

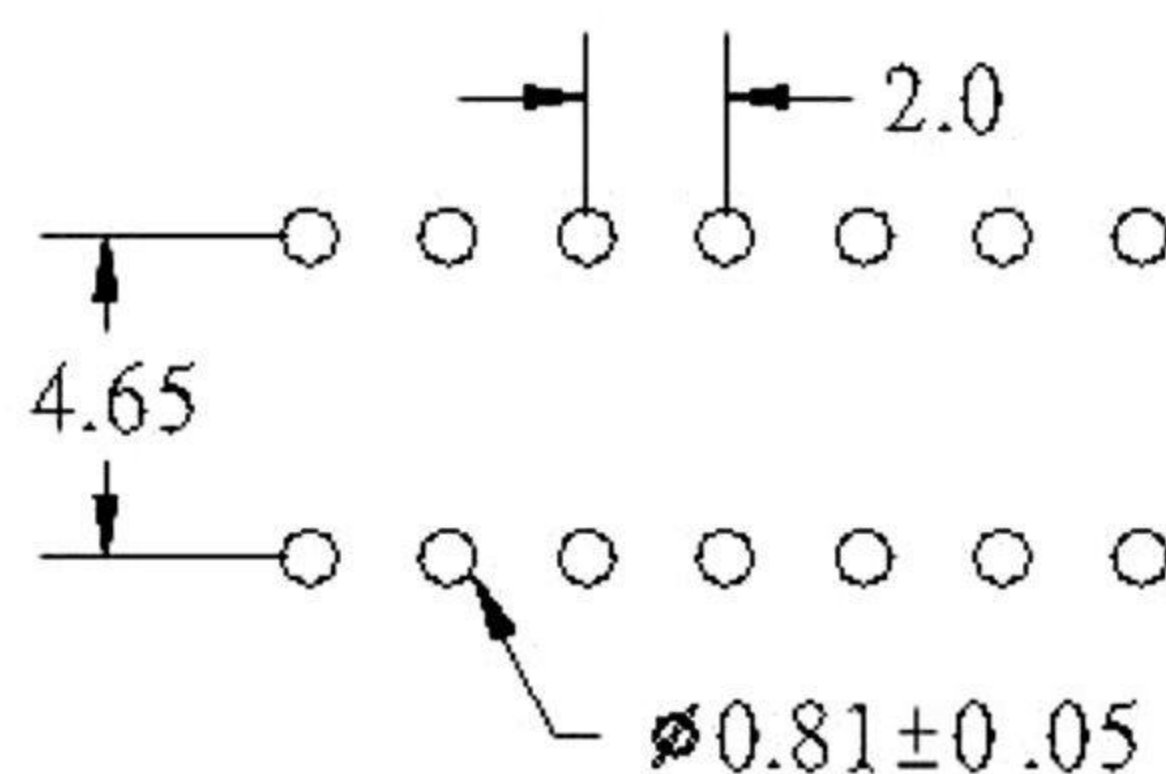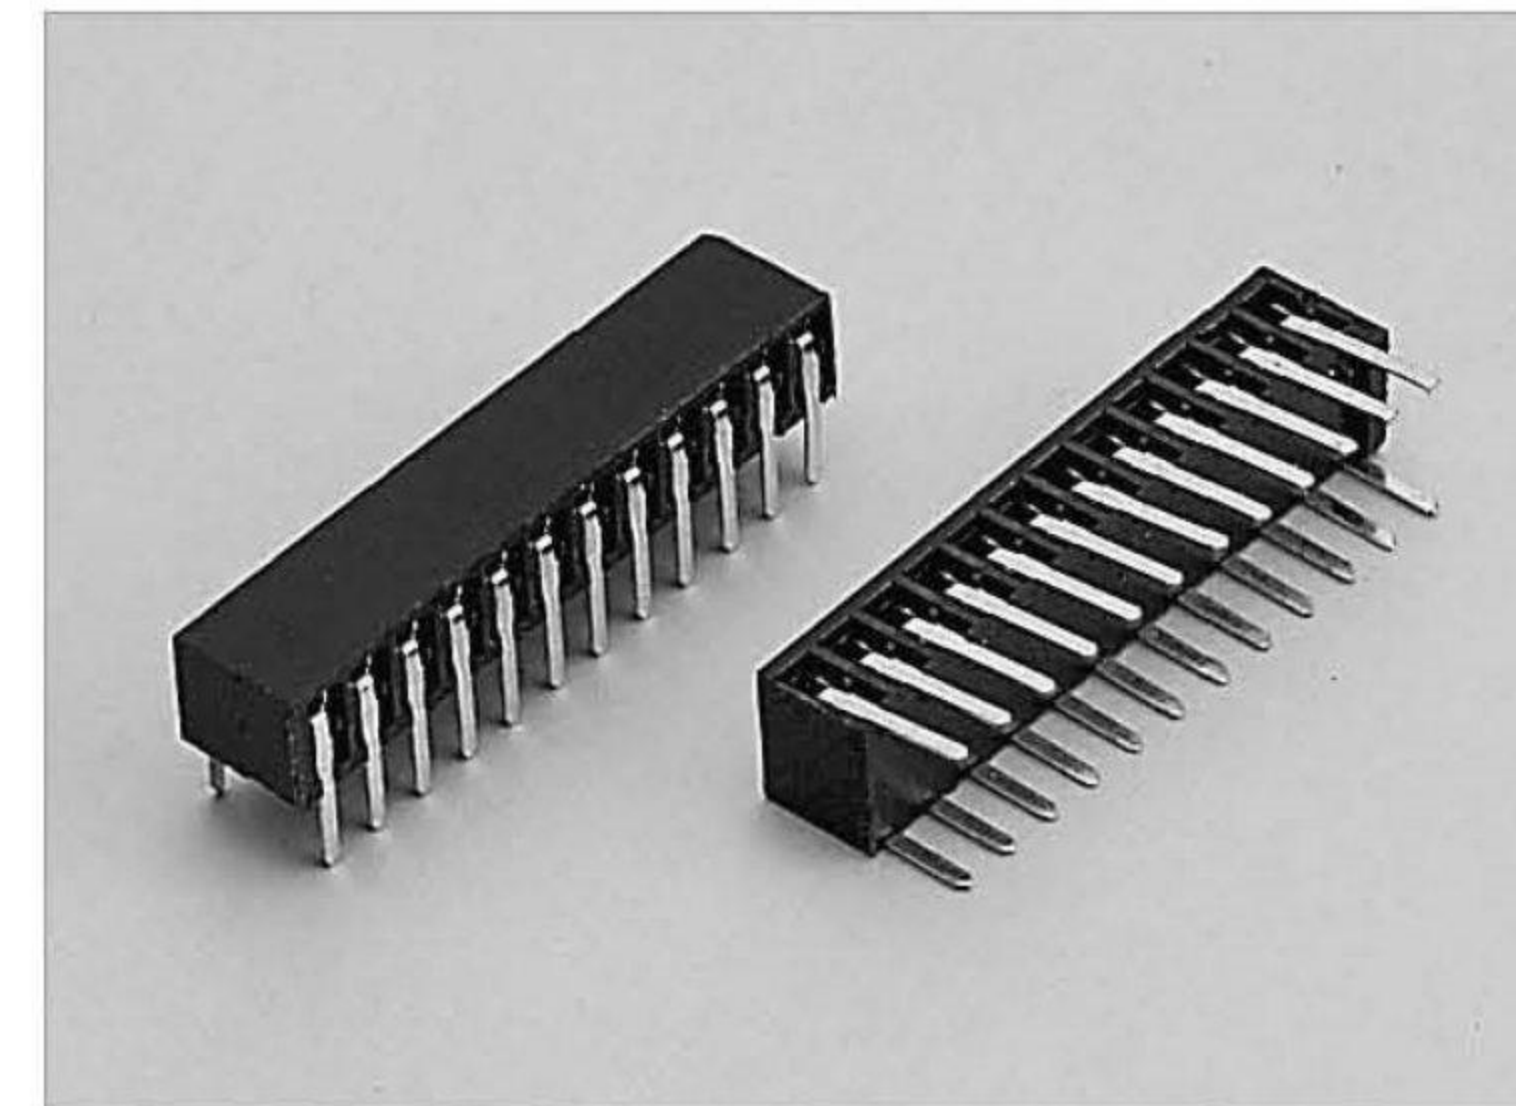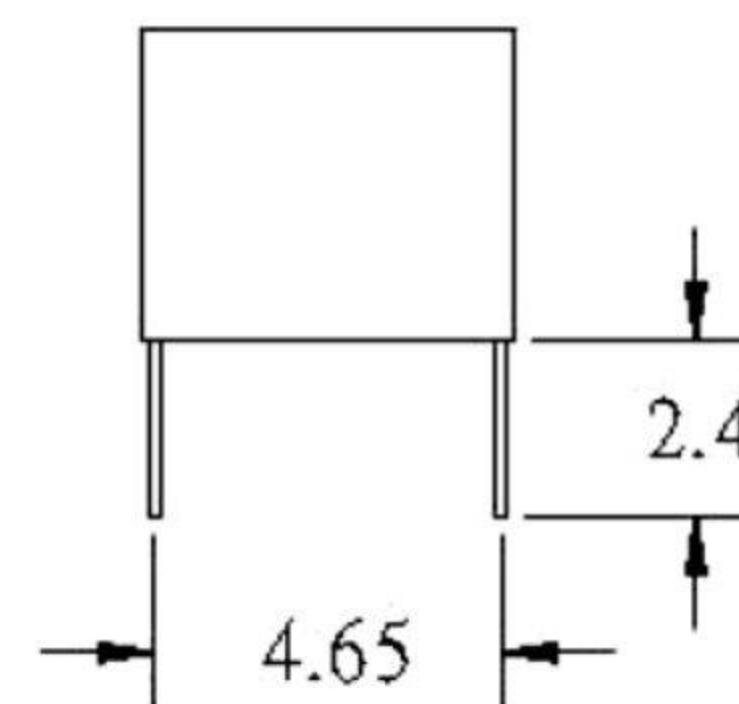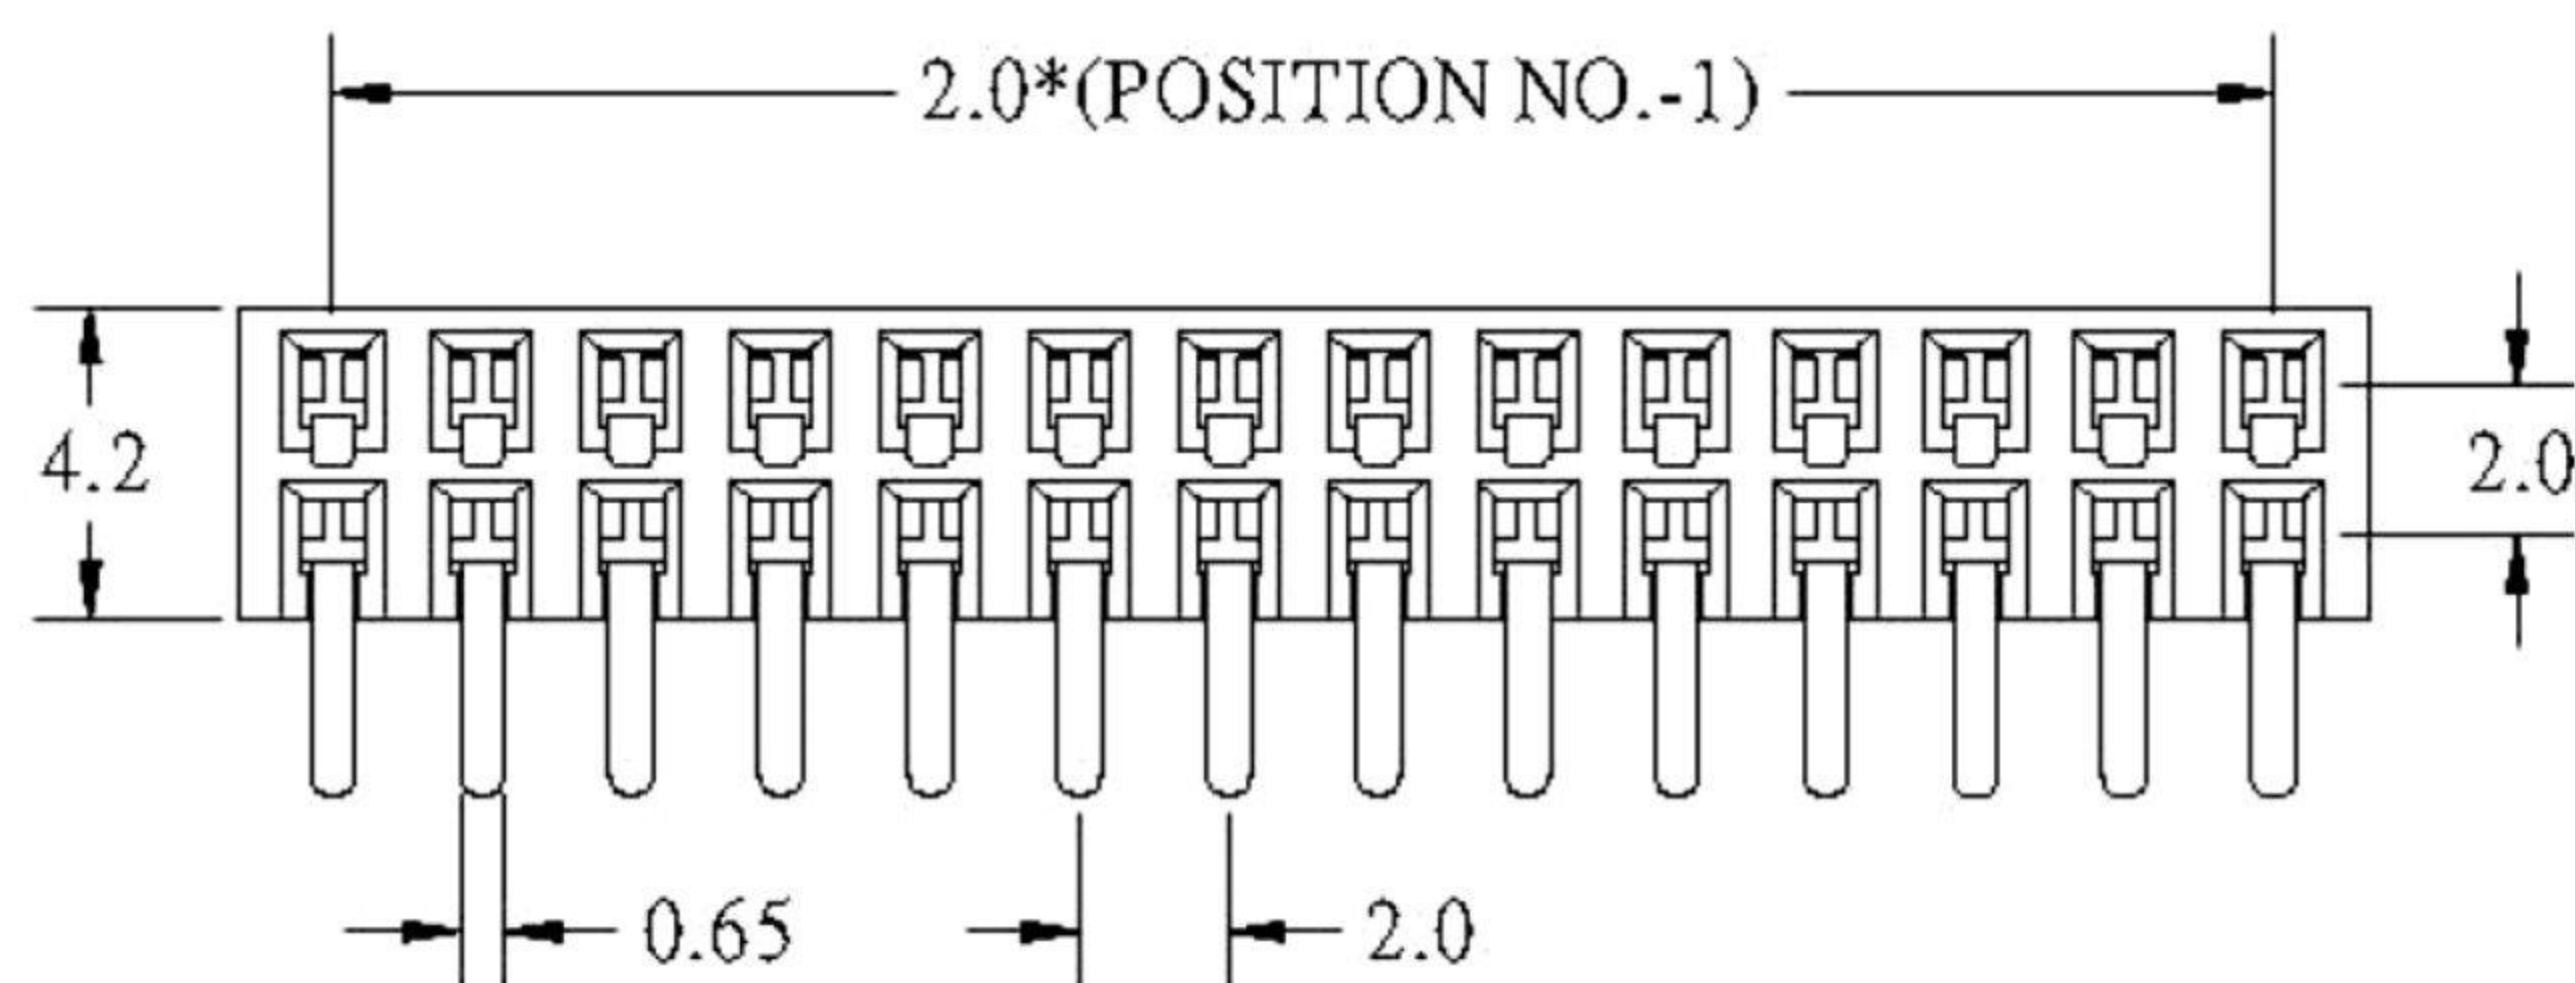


RECOMMENDED P.C.B LAYOUT

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准 HELEN

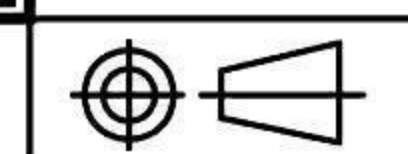

TOLERANCE
容許公差

PART NAME 品名

DWG.
製圖 ABBY

SCALE
比例 參考

.0 ±
.00 ±
ANG. ±

2.0mm SIDE ENTRY
FEMALE HEADER DUAL ROW
H:4.2mm 2XXXP ROHS

DATE 制表日

UNIT
單位 MM

SIZE.
紙張尺寸 A4

PART NO.

2012/08/13

PAGE
張數 1 OF 1

REV.
版次 B

料號 C6814-XXBIXH00R