


Current Rating and voltage: 3 Amps 250V(r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Plastic,UL 94V-0
 Finish: Standard: Gold Flash all over

Recommended P.C. Board Hole Layout

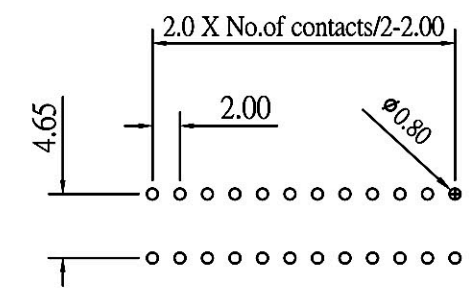

04~20 pin : 0.10 mm MAX.
 22~50 pin : 0.20 mm MAX.
 52~80 pin : 0.30 mm MAX.

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty		TOLERANCE .X ±0.3 .XX ±0.20 .XXX ±0.100	PART NAME 品名 2.0mm SIDE ENTRY FEMALE HEADER DUAL ROWS H:5.0mm ROW PITCH:4.65mm 2XXX GOLD FLASH PLATING BLACK COLOR(NYLON 6T)TUBE PACKING ROHS
DWG. 製圖 Lena	SCALE 比例 參 考	UNIT 單位 M M	PART NO. 料 號 C6815-XXBIGL00R
DATE 制表日 2019/10/25	PAGE 張數 1 OF 1	REV. 版本 B	