


Specifications
 Current Rating:2.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon 6T

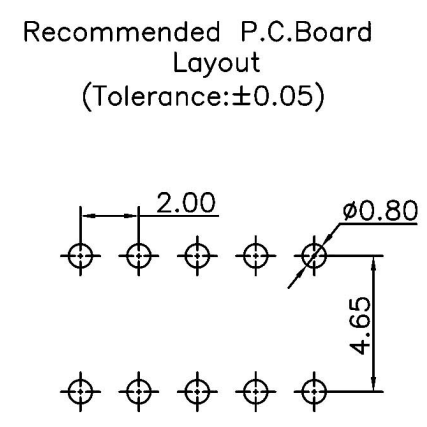

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 參考	GENERAL TOLERANCE X:±5.0° X:±0.30 .X:±3.0° .X:±0.25 .XX:±2.0° .XX:±0.15 .XXX:±1.0° .XXX:±0.10	PART NAME 品名 2.0mm SIDE ENTRY FEMALE HEADER DUAL ROW H:4.4mm 2XXXXP GOLD FLASH PLATING ROHS
DWG. 製圖 Betty	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C6815-XXBIXH00R
DATE 制表日 2013/09/03	PAGE 張數 1 OF 1	REV. 版次 B	