


Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 500VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 High temperature Nylon or
 Equivalent Material

Recommended P.C.Board
 Layout
 (Tolerance: ±0.05) $\Delta 2$

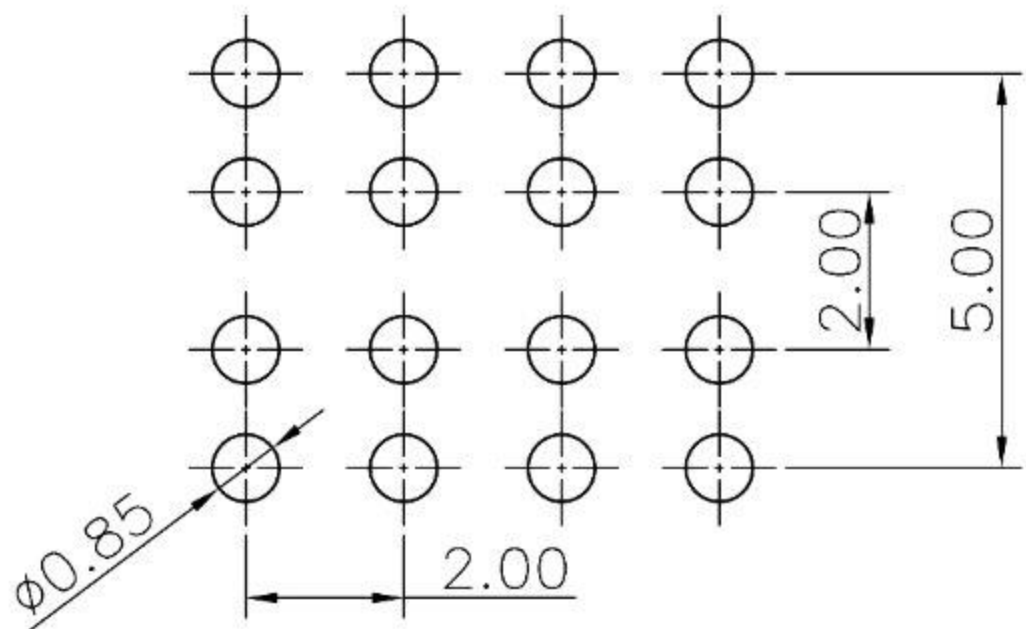

RoHS Compliant **HSM 玄茂科技股份有限公司**
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 BETTY	SCALE 比例 参考	TOLERANCE	PART NAME 品名
DWG. 製圖 KAREN		UNIT 單位 MM	2.0mm FEMALE HEADER DUAL ROW H:4.3mm 180° (BENDING PIN) 2*XXP FULL GOLD BOTTOM ENTRY PIN LENGTH:3.4mm FOOT SPACING:5.0mm ROHS
DATE 制表日 2014/05/14	PAGE 張數 1 OF 1	SIZE. 紙張尺寸 A4	PART NO. 料號 C6816-XXBSGHAXR