
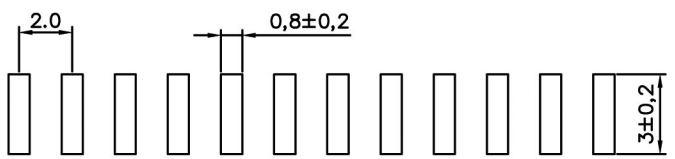
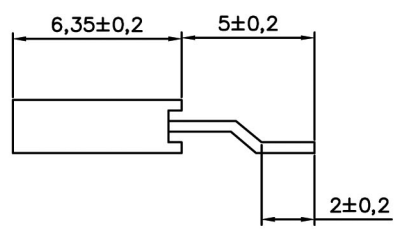
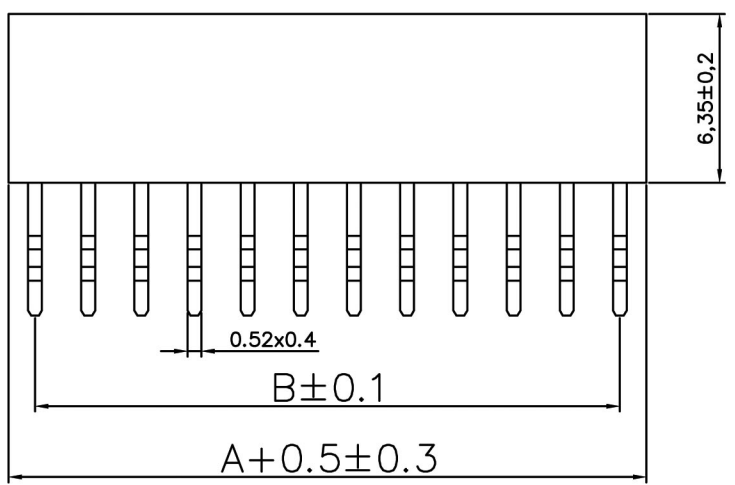


1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

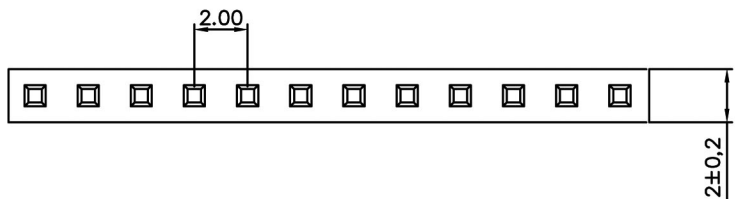

### SPECIFICATIONS

Current Rating : 1.5AMP  
 Operation Temperature: -40° C to+105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: PA6T  
 Contact Material : Brass  
 Contact plating : Au or Sn over 50u" Ni

### Dimensions list

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1			21	42.0	40.0
2	4.0	2.0	22	44.0	42.0
3	6.0	4.0	23	46.0	44.0
4	8.0	6.0	24	48.0	46.0
5	10.0	8.0	25	50.0	48.0
6	12.0	10.0	26	52.0	50.0
7	14.0	12.0	27	54.0	52.0
8	16.0	14.0	28	56.0	54.0
9	18.0	16.0	29	58.0	56.0
10	20.0	18.0	30	60.0	58.0
11	22.0	20.0	31	62.0	60.0
12	24.0	22.0	32	64.0	62.0
13	26.0	24.0	33	66.0	64.0
14	28.0	26.0	34	68.0	66.0
15	30.0	28.0	35	70.0	68.0
16	32.0	30.0	36	72.0	70.0
17	34.0	32.0	37	74.0	72.0
18	36.0	34.0	38	76.0	74.0
19	38.0	36.0	39	78.0	76.0
20	40.0	38.0	40	80.0	78.0

<b>RoHS Compliant</b>	<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
	APPD. 核准 DWG. 製圖 DATE 制表日 2017/03/29	Hedy 2017/03/29
SCALE 比例 UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NAME 品名 2.0mm FEMALE HEADE SINGLE ROW HORIZONTAL SMT TYPE 1XXXP H:6.35mm(W:2.0mm)GOLD FLASH PLATING BLACK INSULATOR PA6T UL94V-0 REEL PACKING ROHS
PAGE 張數 1 / 1	REV. 版次 A	PART NO. 料號 C6831-XXADGHR0L

1 2 3 4 5 6 7 8