


Specifications  
 Current Rating: 2Amp  
 Insulation Resistance: 1000MΩMin.  
 Dielectric Withstanding Voltage: 500VAC  
 Contact Resistance: 20mΩMax.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP Black

Recommended P.C.B. Layout

(Tolerance: 0.05mm)

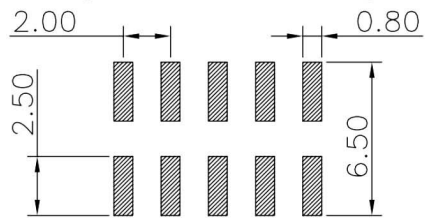

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE X'±5.0' X±0.30 .X'±3.0' X±0.25 .XX'±2.0' .XX±0.15 XXX'±1.0' .XXX±0.10	PART NAME 品名 2.0mm FEMALE HEADE DUAL ROW HORIZONTAL SMT TYPE 2XXXP H:6.35mm(W:4.0mm) GOLD FLASH PLATING BLACK INSULATOR LCP UL94V-0 ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE. 紙張尺寸 A4	PART NO. 料號 C6831-XXBDGHX0R
DATE 制表日 2015/07/06	PAGE 張數 1 OF 1	REV. 版次 B	