


Specifications
 Current Rating:2Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

Recommended P.C.Board Layout
 (Tolerance:±0.05)

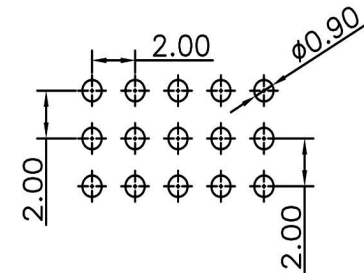

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	GENERAL TOLERANCE	PART NAME 品名
DWG. 製圖		UNIT 單位	2.0mm FEMALE HEADER THREE ROW
DATE 制表日	PAGE 張數	SIZE. 紙張尺寸	H=6.35mm 3XXXP RIGHT ANGLE TYPE
2018/08/02	1 OF 1	REV. 版次	DIP LENGTH=2.2mm MATERIAL:LCP TUBE PACKING ROHS
Betty		A	PART NO. 料號
		A	C6832-XXCRXH1TN