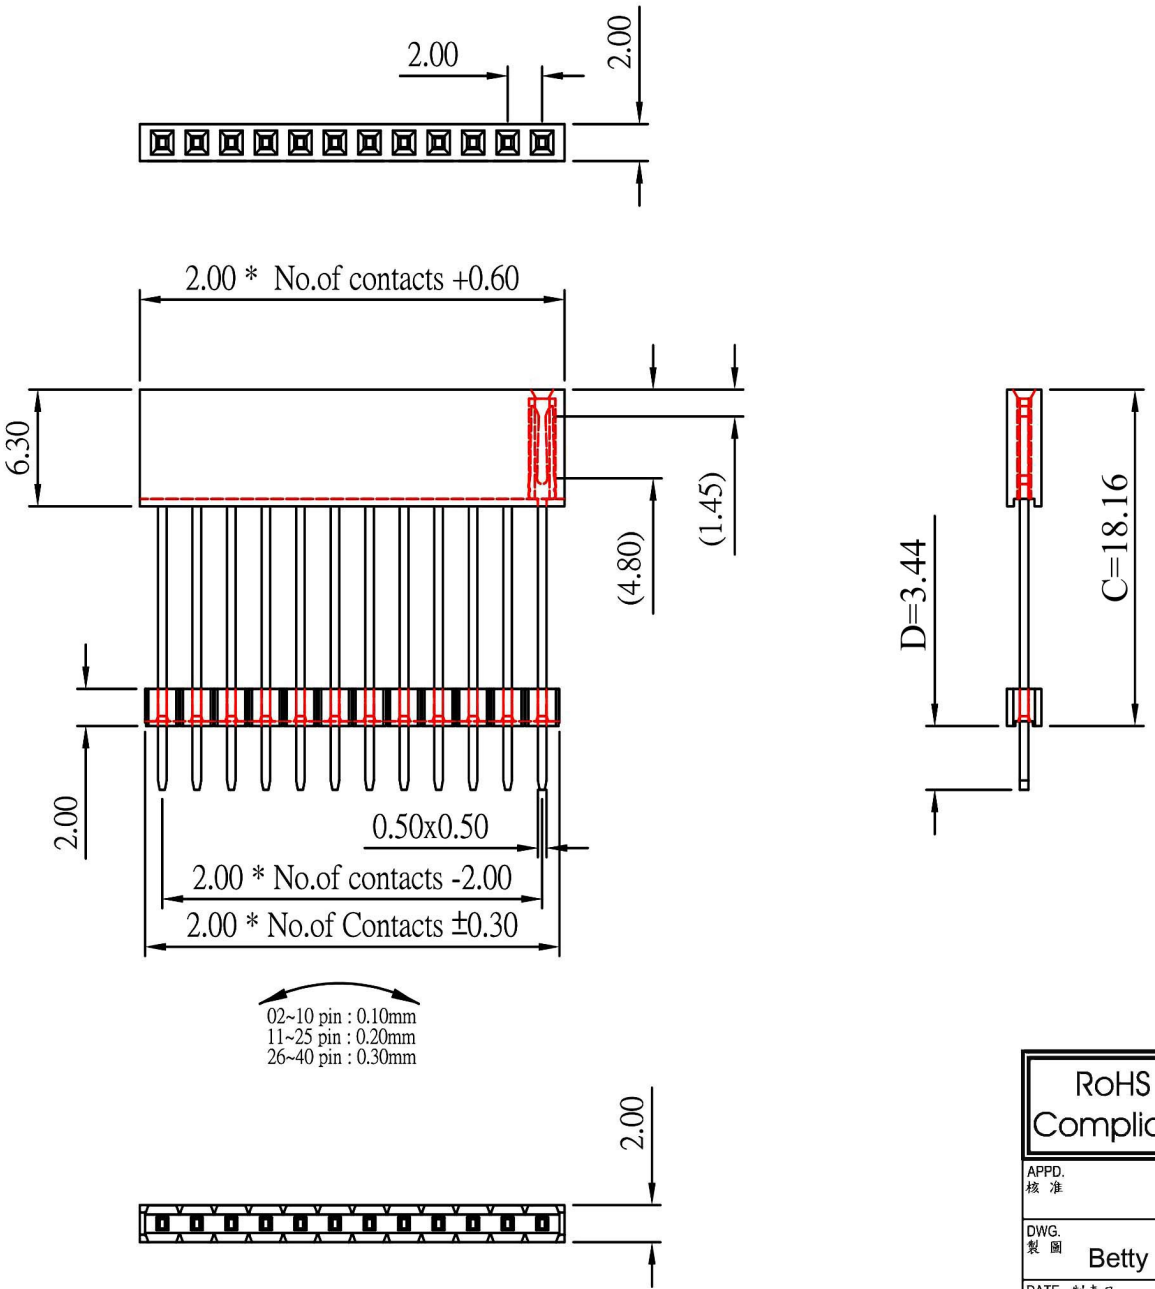

Current Rating and voltage: 2 Amps 250V(r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy
Insulator Material: High Temperature Plastic, Nylon-6T,UL 94V-0
Finish: Standard: Gold Flash all over

Recommended P.C. Board Hole Layout

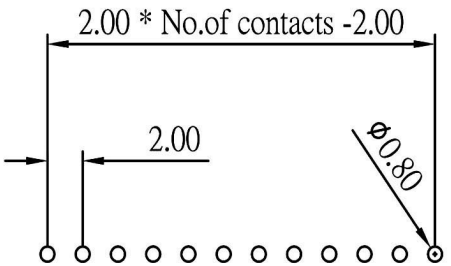

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准		TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 2.0mm FEMALE HEADER+PIN HEADER H:6.3mm+H:2.0mm SINGLE ROW 1XXXP STRAIGHT TYPE GOLD FLASH PLATING (C=18.16mm D=3.44mm) NYLON 6T UL94V-0 ROHS
DWG. 製圖	Betty	SCALE 比例 參考	
		UNIT 單位 MM	SIZE. 紙張尺寸 A4
DATE 制表日	2019/02/18	PAGE 張數 1 OF 1	REV. 版次 A
			PART NO. 料號 C6833-XXASGHOADR