


Current Rating and voltage: 2 Amps 250V(r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: High Temperature Plastic,
 Nylon-6T,UL 94V-0
 Finish: Standard: Gold Flash all over

Recommended P.C. Board Hole Layout

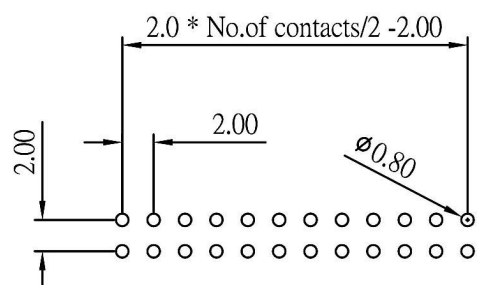

04~20 pin : 0.10mm
 22~50 pin : 0.20mm
 52~80 pin : 0.30mm

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	UNIT 單位	SIZE. 紙張尺寸	2.0mm FEMALE HEADER+PIN HEADER
DATE 製表日	PAGE 張數	REV. 版次	H:6.3mm+H:2.0mm DUAL ROW 2XXXP STRAIGHT TYPE GOLD FLASH PLATING (C=18.16mm D=3.44mm)
2019/02/18	1 OF 1	A	NYLON 6T UL94V-0 BOX PACKING ROHS
Betty		PART NO. 料號	
		C6834-XXBSGHOADR	