

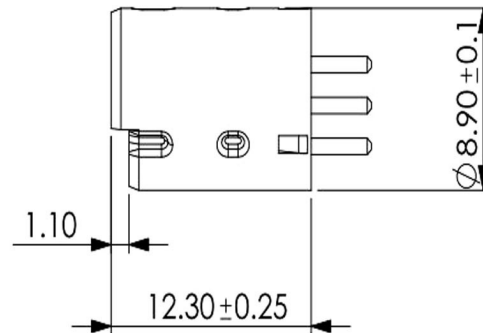


SECTION A-A

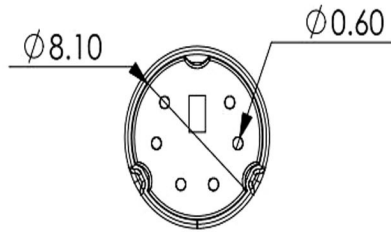

Specifications

rating :  
 100V AC 1A MAX or 12V DC 2A MAX  
 contact resistance :  
 30mΩ MAX  
 insulation resistance :  
 MIN 50MΩ at 250V DC  
 voltage withstand :  
 250V AC, 1 minute  
 operating temp : -25°C to +80°C

3	Terminals	Brass	Silver Ptd.	6
2	3P HOUSING	PBT		1
1	METAL SHIELD COVER	Brass	Nickel Ptd.	1
No.	Description	Material	Treat	Q'ty

RoHS Compliant		<b>玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准	 SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 MINI DIN MOLDED TYPE 6P MALE MACHINED PIN W/SHORT SHELL (NICKEL PLATING) PIN: SILVER PLATED ROHS
DWG. 製圖	Betty	UNIT 單位	SIZE. 紙張尺寸
DATE 制表日	PAGE 張數	M M	A 4
2016/04/29	1 OF 1	REV. 版次	A
		PART NO. 料號 C8010-06MBSVB0R	