

1 2 3 4 5 6 7 8

A

B

C





D

E

F

G

H

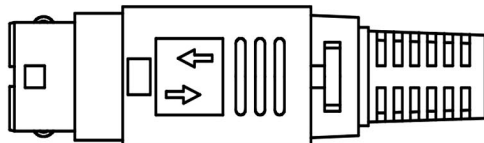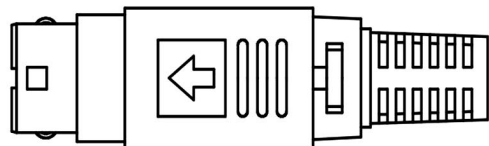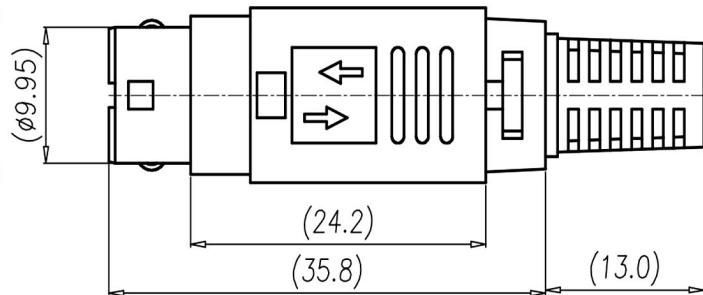

1. MATERIAL:
- 1-1. HOUSING: PBT, UL94V-0
CONTACT: BRASS.
 - 1-2. PLASTIC COVER: ABS
 - 1-3. METAL SHELL: BRASS. / NICKEL PLATED.
 - 1-4. METAL CAP: BRASS / NICKEL PLATED.
 - 1-5. CABLE FIXER: BRASS / TIN PLATED.
 - 1-6. POM RING : POM
 - 1-7. SPRING : STEEL / NICKEL PLATED.
 - 1-8. PLASTIC TUBE : ABS
 - 1-9. SR : PVC
2. FINISH:
- 2-1. CONTACT : SILVER 50u"
3. ELECTRICAL SPECIFICATION :
- 3-1. RATED CURRENT : 7.5A/DC MAX
 - 3-2. RATED VOLTAGE : 20V/DC MAX
4. ENVIRONMENTAL :
- 4-1. OPERATION TEMPERATURE : -20c~85c

	C8024-04MSEVB0R	POWER 4PIN (M)Single-Arrow Black	7.0
○	C8024-04MSDVB0R	POWER 4PIN (M)Single-Arrow Black (Standard Type)	6.5
	C8024-04MSCVB0R	POWER 4PIN (M)Single-Arrow Black	5.5
	C8024-04MSBVB0R	POWER 4PIN (M)Single-Arrow Black	5.0
	C8024-04MSAVB0R	POWER 4PIN (M)Single-Arrow Black	4.0
	C8024-04MDEVB0R	POWER 4PIN (M)Double-Arrow Black	7.0
	C8024-04MDDVB0R	POWER 4PIN (M)Double-Arrow Black	6.5
	C8024-04MDCVB0R	POWER 4PIN (M)Double-Arrow Black	5.5
	C8024-04MDBVB0R	POWER 4PIN (M)Double-Arrow Black	5.0
	C8024-04MDAVB0R	POWER 4PIN (M)Double-Arrow Black	4.0
	P/N	DESCRIPTION	SR OD

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°	PART NAME 品名 POWER DIN 4PIN PLUG ASSEMBLY TYPE SILVER PLATING BLACK COLOR ROHS
DWG. 製圖 Betty	UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO. 料號 C8024-04MXXVB0R
DATE 制表日 2018/09/12	PAGE 張數 1 OF 1	REV. 版次 A	

1 2 3 4 5 6 7 8