
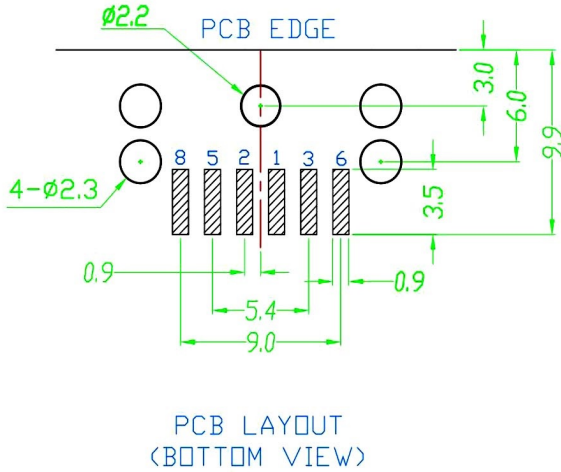


**Specification:**

Contact Resistance: 30m Ohm Max.  
 Insulation Resistance: 100M Ohm Min. AT 500V DC  
 Rated Voltage And Current: DC12V.2A Max; AC 100V.1A Max  
 Dielectric Withstanding Voltage: 250V AC For 1 Minute  
 Durability (Life Test): 100 Cycles  
 Insertion Force: 4.0KG Maximum.  
 Extraction Force: 0.9KG Minimum.  
 Operating Temp: -25°C ~ +70°C

NO.	NAME	MATERIAL	FINISH	Q'TY
1	HOUSING	NYLON PA9T G.F.	BLACK	1
2	CONTACT	PHOS. BRONZE T:0.2	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)	6
3	SHIELD	BRASS T:0.3	NICKEL PLATED Ni:80~120u"	1
4	BACK COVER	NYLON PA9T G.F.	BLACK	1

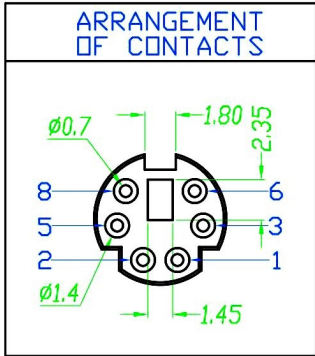

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 DWG. 製圖 DATE 制表日 2019/04/01	Betty	TOLERANCE X. ±0.38 .X ±0.25 .XX ±0.13 .XXX ±0.05 SCALE 比例 參考 UNIT 單位 M M PAGE 張數 1 OF 1 REV. 版次 C	PART NAME 品名 MINI DIN JACK SMT TYPE 6P WITH FULLY SHIELDED KINK FOOT WITH METAL POST BLACK COLOR SELECTIVE GOLD PLATING PART NO. 料號 C8099-06YKSBM0R