


Arrangement of Contact

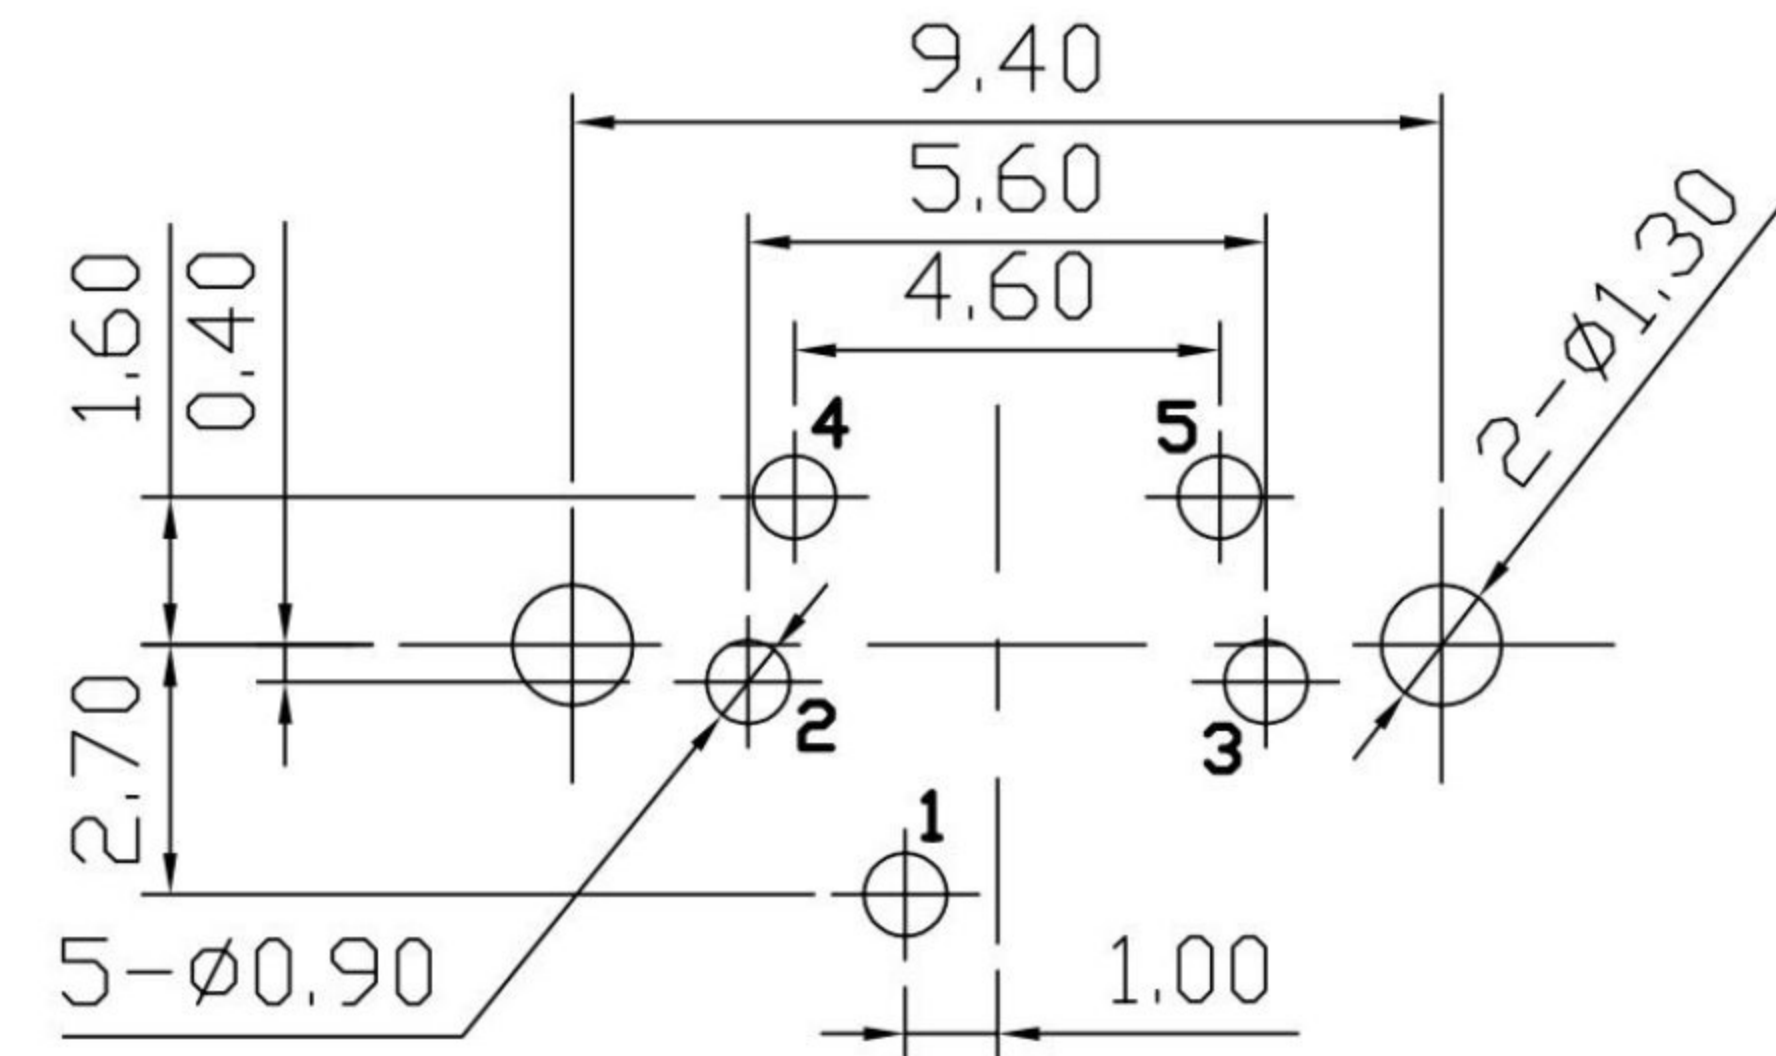

Pin Hole Layout  
(Jack Bottom View)

Current Rating 額定電流? 5A  
Voltage Rating 額定電壓? 24V  
Operating Temp 工作溫度? -40 ~70度

SPECIFICATIONS:

Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstand Voltage : AC 500V for one minute  
Current Rating : 5A  
Voltage Rating : 24V  
Operating Temp : -40°C to +70°C

Remark: ▲ : The Most Important Dimension

NO.	Description	Material	Q'TY	Finish
3.	Housing	PBT	1	Black Color
2.	Shell	0.4T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	5	Silver Plating

RoHS Compliant **HSM** 玄茂科技股份有限公司  
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 Betty	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 MINI DIN JACK 5P VERTICAL TYPE W/O LOCK PIN: SILVER PLATED ROHS
DWG. 製圖 Betty	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	PART NO. 料號 C8101-05PDB000R
DATE 制表日 2012/07/11	REV. 版次 A	