
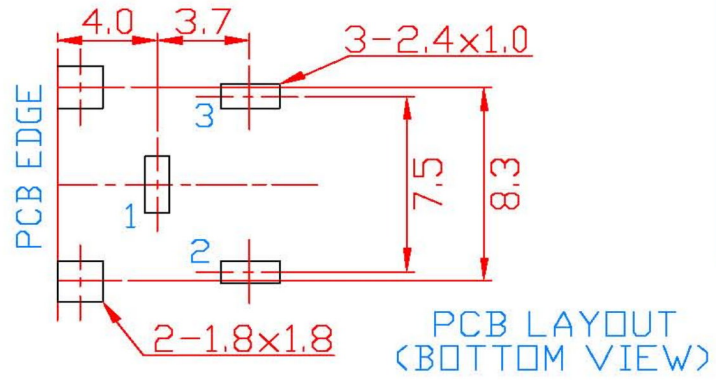


NO.	NAME	MATERIAL	FINISH	Q'TY
1	BARREL	BRASS T:0.4	NICKEL PLATED	1
2	SPRING TERMINAL	PHOS. BRONZE T:0.30	TIN PLATED	1
3	TERMINAL	BRASS T:0.4	TIN PLATED	1
4	HOUSING	PBT G.F.	W.R.Y.B.GR.BL.OR	1

Specification:  
 Contact Resistance: 30m Ohm Max. At AC 100mA Max.1KHz.  
 Insulation Resistance: 100M Ohm Min. At 500V DC.  
 Rated Voltage And Current: DC 12V,2A Max.  
 Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute.  
 Durability (Life Test): 4000 Cycles.  
 Insertion Force: 0.3~3.0 Kg.  
 Extraction Force: 0.3~3.0 Kg.



Green Product

RoHS Compliant		<b>玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 Helen DWG. 製圖 Yumi DATE 制表日 2009/12/31	 TOLERANCE 容許公差 .00 ± .00 ± ANG. ± UNIT 單位 M M PAGE 張數 1 OF 1	PART NAME 品名 RCA JACK RIGHT ANGLE 3P W/ 2 POSTS YELLOW INSULATOR ROHS LOW-LEAD	PART NO. 料號 C8105-03CTY000R