


Specification:
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 100M Ohm Min. AT 500V DC
 Rated Voltage And Current: DC12V.2A Max; AC 100V.1A Max
 Dielectric Withstanding Voltage: 250V AC For 1 Minute
 Durability (Life Test): 100 Cycles
 Insertion Force: 4.0KG Maximum.
 Extraction Force: 0.9KG Minimum.
 Operating Temp: -25° C~70° C

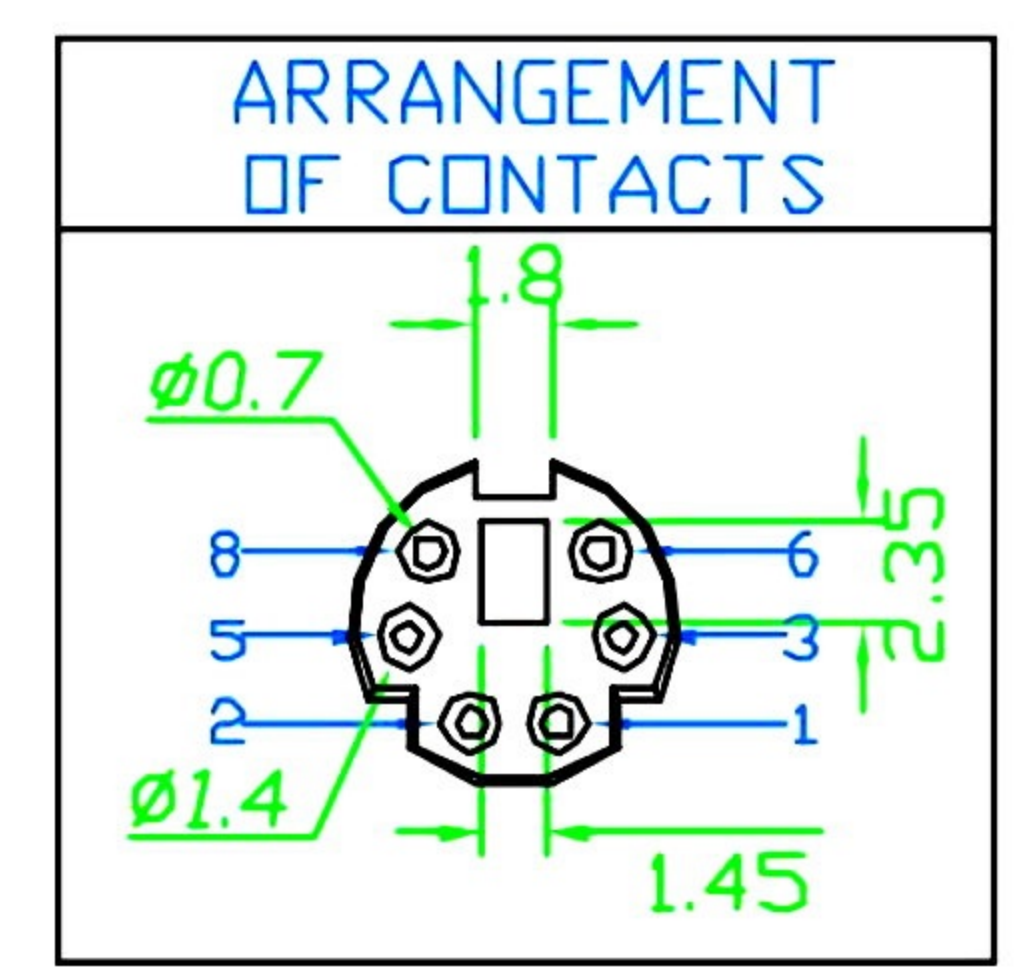

NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	TOP HOUSING	PBT G.F.	BLACK		1
2	BOTTOM HOUSING	PBT G.F.	BLACK		1
3	BACK COVER	PBT G.F.	BLACK		1
4	CONTACT TERM.	PHOS. BRONZE T:0.2	GOLD/TIN PLATED	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)	12
5	FRONT SHIELD	BRASS T:0.3	TIN PLATED	TIN:120~200u"	1
6	BACK SHIELD	BRASS T:0.3	TIN PLATED	TIN:120~200u"	1

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN		TOLERANCE 容許公差 X ±0.38 .X ±0.25 .XX ±0.13 .XXX ±0.05	PART NAME 品名 MINI DIN JACK 2X6P FULLY SHIELDED KINK TYPE SELECTIVE GOLD PLATING BLACK COLOR ROHS
DWG. 製圖 ABBY	SCALE 比例 參考 UNIT 單位 MM	SIZE. 紙張尺寸 A4	PART NO. 料號 C8200-06NKSB00R
DATE 制表日 2014/06/11	PAGE 張數 1 OF 1	REV. 版次 A	