


10	25.30	22.86
8	20.22	17.78
6	15.14	12.70
4	10.06	7.62
NO.OF POS.	DIM. A	DIM. B


SCHMATIC(TYP.)

(4,6,8,10 POS AVAIL)

ITEM	DESC.	Q'TY	MATERIALS	TREATMENT
1.	COVER	1	HIGH - TEMP. THERMOPLASTIC PA-9T UL 94V-0	MOLDED BLACK
2.	TERMINAL	1	BRASS	GOLD PLATED
3.	BASE	1	HIGH - TEMP. THERMOPLASTIC PA9T UL 94V-0	MOLDED BLACK
4.	ACTUATOR	*	HIGH - TEMP. THERMOPLASTIC LCP UL 94V-0	MOLDED WHITE
5.	CONTACT	*	COPPER	GOLD PLATED AT CONTACT AREA.
6.	TAPE		KATPON	-

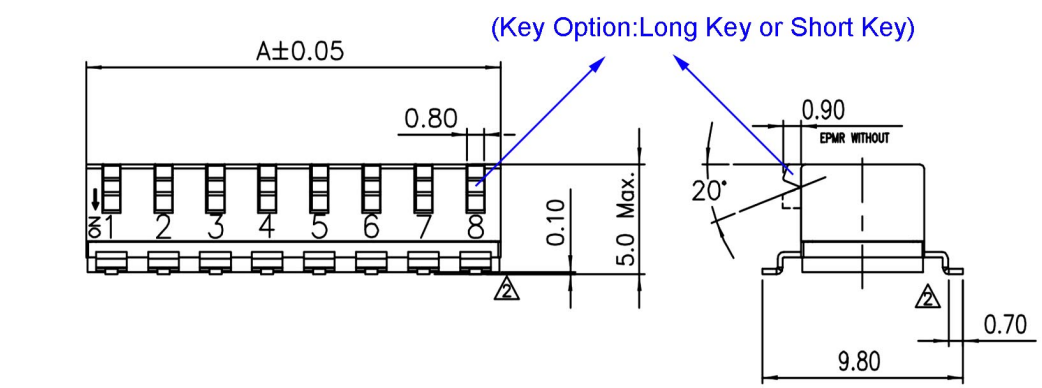

NOTE:
 1. ALL DIMENSIONS ARE IN MILLIMETERS.
 2. GENERAL TOLERANCES ±0.20mm.
 3. MATERIAL & * :SEE SPECIFICATION.
 4. P:Pitch=2.54mm.

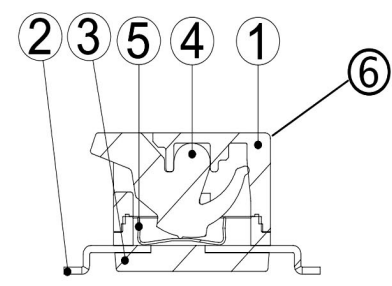

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 DIP SWITCH PIANO SMT TYPE XXPIN PUSH DOWN ON TYPE BLACK COLOR ROHS
DWG. 製圖 Betty	UNIT 單位 M M	SIZE. 紙張尺寸 A 4	PART NO. 料號 C8304-XXXNXXB0R
DATE 製表日 2019/10/02	PAGE 張數 1 OF 1	REV. 版次 C	