
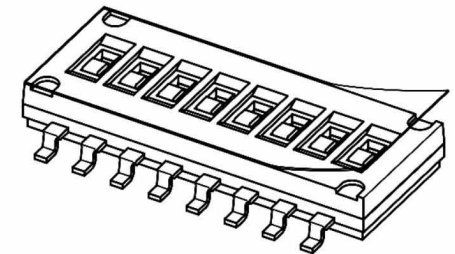
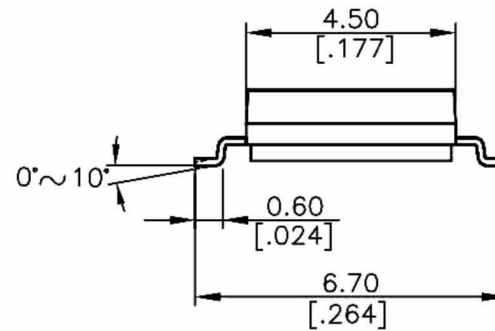


P.C.B LAYOUT

2	3.77	[.148]
4	6.31	[.248]
6	8.85	[.348]
8	11.39	[.448]
10	13.93	[.548]
NO. OF POS	DIM A	

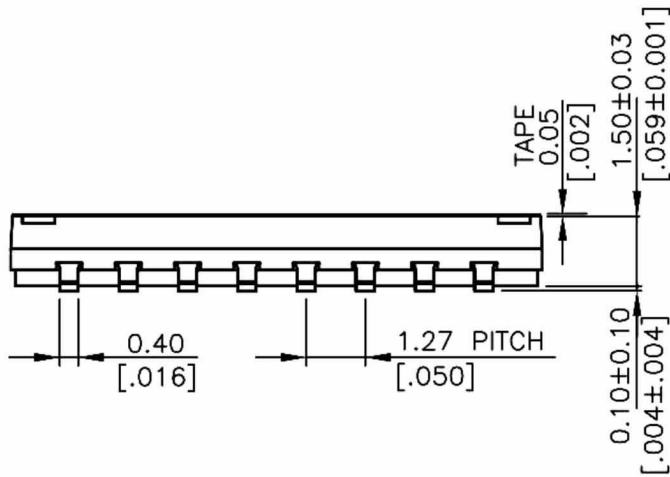

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHS INCHS.
2. GRENERAL TOLERANCE: ±0.2mm.
3. TAKE 110 DEGREE FOR CONTIONOUS 96 HOURS.

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 1.27mm DIP SWITCH SMT TYPE XXP SHORT KEY WITH TAPE SEALED GOLD 3U" PLATING TERMINAL LENGTH:6.7mm ROHS
DWG. 製圖 Betty	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C8308-XXSYJXBAR
DATE 製表日 2013/1/8	PAGE 張數 1 OF 1	REV. 版次 B	