


NO. OF POS.	DIM. A	DIM. B
1	2.44[.096]	
2	4.98[.196]	2.54[.100]
3	7.52[.296]	5.08[.200]
4	10.06[.396]	7.62[.300]
5	12.60[.496]	10.16[.400]
6	15.14[.596]	12.70[.500]
7	17.68[.696]	15.24[.600]
8	20.22[.796]	17.78[.700]
9	22.76[.896]	20.32[.800]
10	25.3[0.996]	22.86[.900]
12	30.38[1.196]	27.94[1.100]

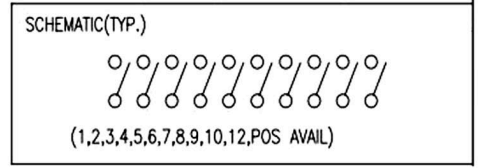

ITEM	DESC.	Q'TY	MATERIALS	TREATMENT
1.	COVER	1	HIGH - TEMP. THERMOPLASTIC PA-9T UL 94V-0	MOLDED BLACK
2.	CONTACT	*	COPPER	GOLD PLATED AT CONTACT AREA
3.	ACTUATOR	*	THERRMOPLASTIC LCP UL 94V-0	MOLDED WHITE
4.	TERMINAL	1	BRASS	GOLD PLATED
5.	BASE	1	HIGH - TEMP. THERMOPLASTIC PA9T UL 94V-0	MOLDED BLACK
6.	TAPE	1	KAPTON	-

NOTE:
 1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.
 2. GENERAL TOLERANCES MAX. ±0.20mm.

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	PART NAME 品名	
DWG. 製圖 Betty	UNIT 單位 M M	2.54mm DIP SWITCH END STACKABLE TYPE	
DATE 制表日 2016/07/26	PAGE 張數 1 OF 1	SMT TYPE XXPIN LONG KEY W/O TAPE SEALED GOLD 3U" PLATING ROHS	
	SIZE. 紙張尺寸 A 4	PART NO. 料號 C8313-XXLNJXB0R	
	REV. 版次 A		