


Specification:
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1.5A At 250VAC Minimum.
 Dielectric Withstanding Voltage: 500V AC (rms) for 1 Minute(Rev.2.0)
 Durability (Life Test): 1500 Cycles
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 10 Newton Minimum.

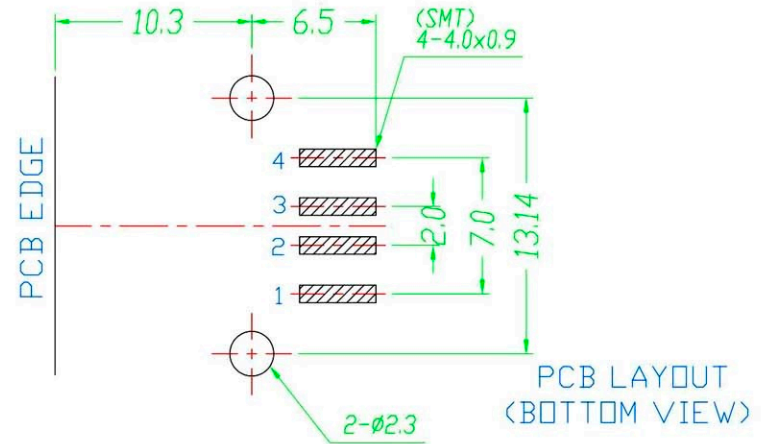

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T G.F.	WHITE OR BLACK	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:XXu"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	Ni:80~120u"

APPD. 核准 DWG. 製圖 DATE 制表日 2018/3/14	Helen	TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 3°	PART NAME 品名 USB A TYPE 4P FEMALE SMT TYPE SHELL DIP L=3.4mm SHELL:HOOK FOOT NICKEL SHELL SMT PIN L=2.4mm (NYLON 9T) AY PACKING ROHS
SCALE 比例 UNIT 單位 PAGE 張數 1 OF 1	參考 M M 1 OF 1	SIZE. 鉗線尺寸 A 4 REV. 版本 A	PART NO. 料號 C8332-04AFDDXXXB