


SPECIFICATIONS:

Contact current Rating:
 1.8 Amperes for pin1&pin4.
 0.25 Amperes other contacts
 Dielectric Withstanding Voltage:AC 100V (RMS)
 Insulation resistance:100Megohms Minimum.

Contact Resistance:
 30m Max for pin1&pin4
 50mΩ Max for other contacts
 Mechanical Characteristics:
 Mating Force:35 Newtons.Maximum
 Unmating Force:10 Newtons.Minimum.
 8N Min After Durability

MATERIAL:
 Housing: LCP+30%GF 94V-0 COLOR:BLUE
 Contact: copper alloy (T=0.25mm)
 Shell: SPCC

PLATING:
 Contact: Au Plated on contact area
 Tin Plated on solder area
 Nickel underplating over all
 Shell: Nickel Plated
 operating Temperature:-55° to+85°

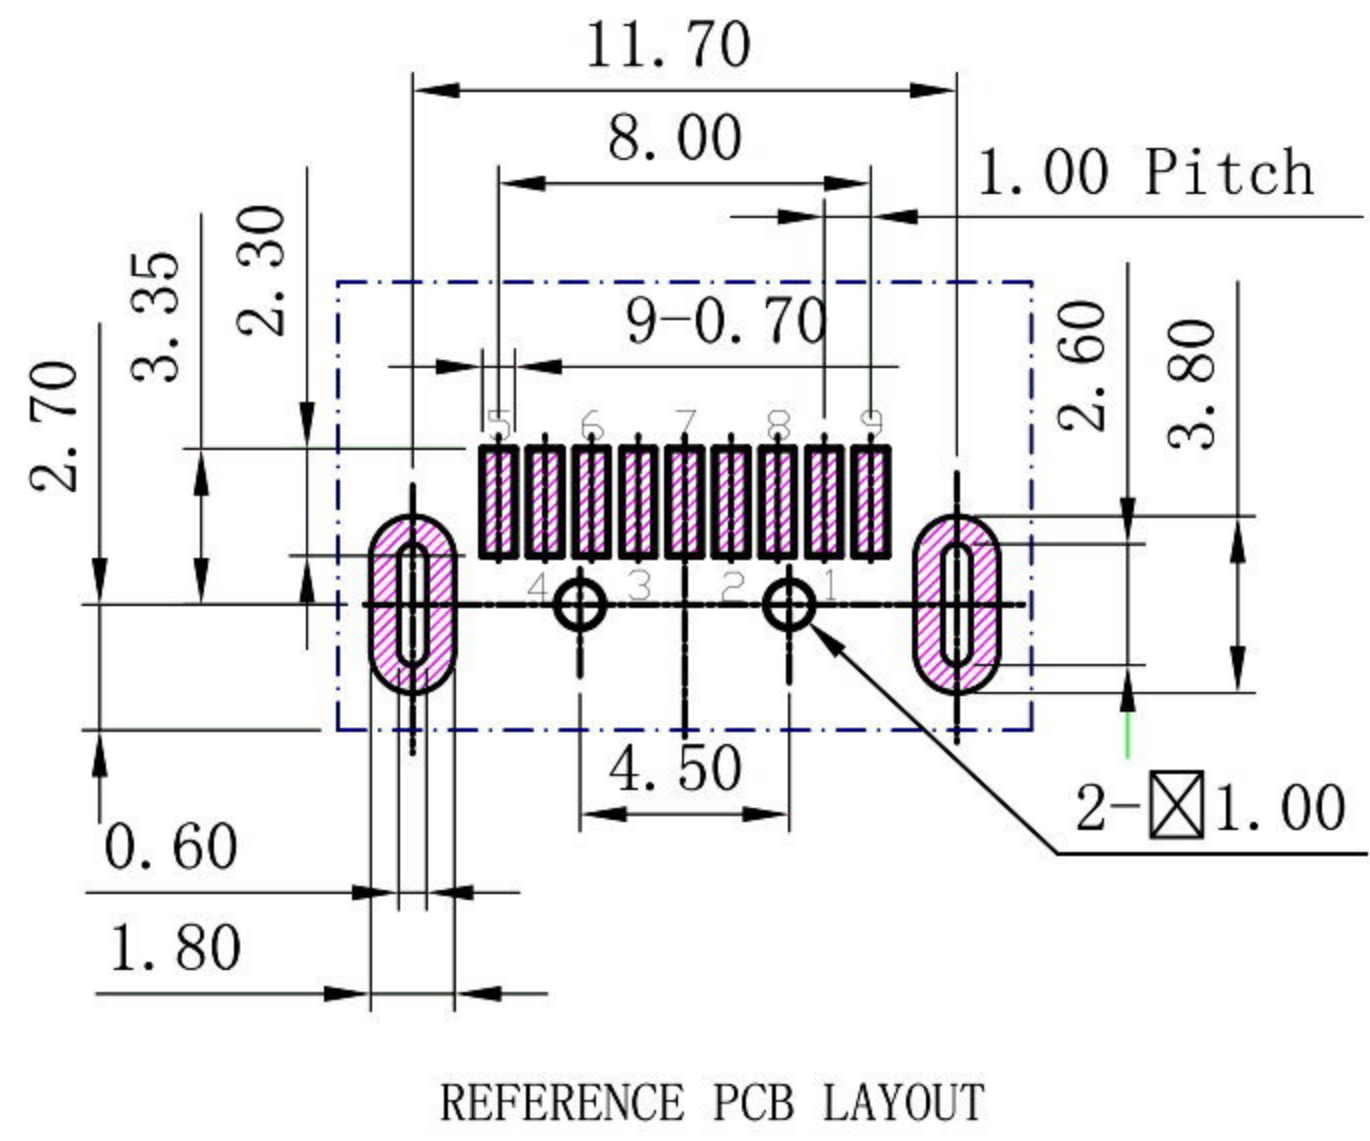

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	APPD. 核准 HELEN DWG. 製圖 ABBY DATE 制表日 2017/08/22	UNLESS OTHERWISE SPECIFIED TOLERANCES X. +/- 0.30 METRIC XX +/- 0.25 FRACTIONS +/- 0.25 ANGLES +/- 2.00
SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	SIZE. 紙張尺寸 A4 REV. 版次 A	PART NO. 料號 C8342-09AMDLCRR