


Specification:
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1.5A At 250VAC Minimum.
 Dielectric Withstanding Voltage: 750V AC (rms) for 1 Minute(Rev. 1.1)
 Durability (Life Test): 1500 Cycles
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 10 Newton Minimum.

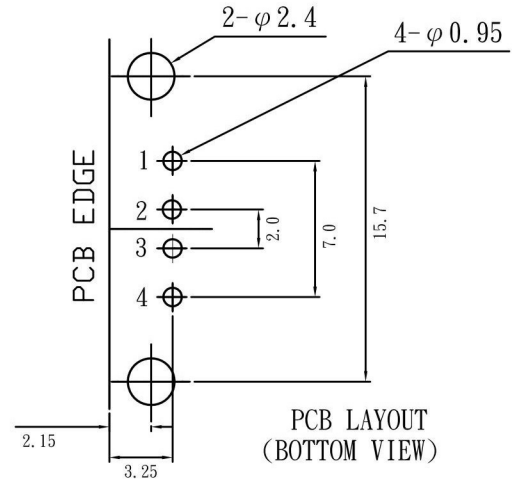

C **8373** — **04** **A** **F** **A** **S** **X** **H** **R**

- 1.PRODUCTS: C:Connector
- 2.SERIES NO.: 8373
- 3.CONTACT NO.: 04
- 4.FUNCTION: A: A Type
- 5.CONTACT TYPE: F:Female
- 6.BODY TYPE: A:Pin:D.I.P & Shell Foot:Board Lock Type
- 7.CONTACT PLATING: S:Selective Gold
- 8.INSULATOR COLOR: W:White B:Black
- 9.OTHER: H:Tray Packing
- 10.R:ROHS

RoHS
Compliant

HSM 玄茂科技股份有限公司
Hsuan Mao Technology Co., LTD.

| NO. | NAME | MATERIAL | FINISH | Q' TY | REMARK |
|-----|----------|---------------------|-----------------|-------|---------------------------------------------------------------------------|
| 1 | HOUSING | PBT G. F. | WHITE | 1 | |
| 2 | TERMINAL | PHOS. BRONZE T:0.25 | GOLD/TIN PLATED | 4 | Gold:1-3u"; NI:40-60u"; TIN:120u" (100% pure Tin of lead free plating) |
| 3 | SHELL | BRASS T:0.3 | NICKEL PLATED | 1 | Ni:80-120u" |

| | | | |
|-----------------|------------------------------------|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| APPD. Helen | SCALE 参考 UNIT mm PAGE 1 OF 1 | TOLERANCE 0. ± 0.38 .0 ± 0.25 .00 ± 0.13 ANG. ± 3° | PART NAME 品名 USB A TYPE 4P FEMALE P.C.B. REVERSE TYPE OFFSET TYPE SHELL FOOT:BOARDLOCK TYPE PIN:DIP TYPE SELECTIVE GOLD PLATING INSULATOR MATERIAL:PBT TRAY PACKING ROHS |
| DWG. ABBY | | SIZE. A 4 | |
| DATE 2017/01/13 | | REV. A | PART NO. 料號 C8373-04AFASXHR |