


General specifications

Circuit : PUSH ON
 Rating : D.C. 12V 50mA
 Contact R.[max] : 100mΩ Max
 Insulation R.[min] : D.C. 100V 100MΩ
 Withstand VOL. : A.C. 250V 1minute


LAYOUT

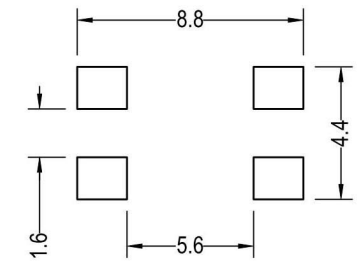

KNOB

LENGTH(L)

T=3.8mm
 B=5mm
 U=6mm
 C=7mm



MATERIAL SPECIFICATIONS

ITEM	PART NAME	MATERIAL	QTY	FINISH
5	KNOB	FR52G30	1	Black
4	COVER	SPCC-SD t=0.3	1	Sn
3	CONTACT	Ag/SUS301	1	Ag Clad
2	CASE	FR52G30	1	Black
1	TERMINAL	Brass Strip H65Y t=0.3	2	Ag Plated

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE	PART NAME 品名
DWG. 製圖	UNIT 單位	UP TO 10 ±0.3	4.5mm X 4.5mm TACT SWITCH SMT TYPE PITCH:7.5mm BUTTON COLOR:BLACK COLOR ROHS
DATE 制表日	PAGE 張數	ABOVE 10 TO 100 ±0.5	
2017/07/21	1 OF 1	ABOVE 100 ±0.8	PART NO. 料號
		ANGULAR DIMENSIONS ±5°	C8713-XBXX000R
		SIZE. 紙張尺寸	
		A 4	
		REV. 版次	
		A	