



CIRCUIT DIAGRAM

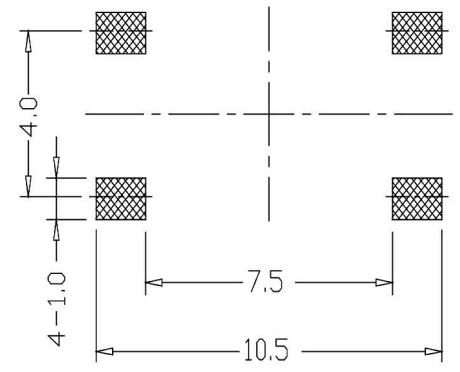

P.C.B LAND DIMENSION

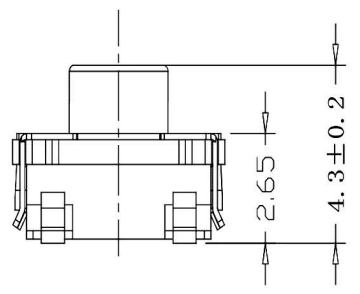

SPECIFICATION

1. Rating: DC 12V 50mA Max
2. Contact resistance: 100mΩ MAX
3. Insulation resistance: 100MΩ Min
4. Dielectric strength: 250VAC/min
5. Operating force: 250gf±50gf
6. Operating life: 300,000 cycles

5	TERMINAL(端子)	1	H65	Ag plating
4	HOUSING(基座)	1	PA6T	—
3	CONTACT FORM(弹片)	1	SUS	Ag plating
2	COVER(盖板)	1	SUS	
1	STEM(按钮)	1	SILICONE	White
NO(序号)	PART NAME(部件名)	QTY(数量)	MATERIAL(材料)	REMARK(备注)

RoHS Compliant	玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.		
	APPD. 核准 DWG. 製圖 DATE 制表日 2020/09/09	SCALE 比例 UNIT 單位 M M PAGE 張數 1 OF 1	UNSPECIFIED TOLERANCE 未指定的公差 ANGULAR(角度) ±0.5° 16 < L ≤ 63 ±0.4 4 < L ≤ 16 ±0.3 L ≤ 4 ±0.2 SIZE. 紙張尺寸 A 4 REV. 版次 A