


1 2 3 4 5 6 7 8

A

A

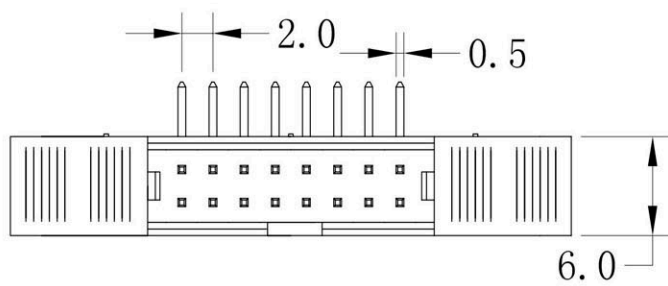


B

B


C

C

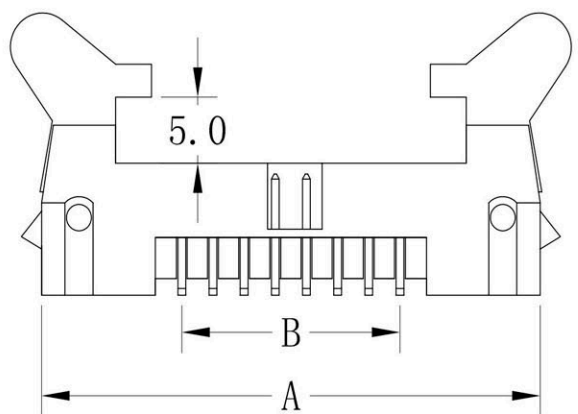

D

D

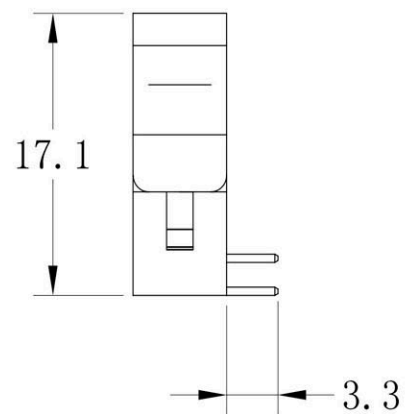


E

E

F

F



PCB LAYOUT

G

G

H

H

SPECIFICATIONS

- Current Rating : 1.5AMP
- Operation Temperature: -40° C to +105° C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage : AC 500V
- Insulator Material : Polyester (UL94V-0)
Standard: PA6T
- Contact Material : Brass
- Contact plating : Au or Sn

Dimensions list

Contacts Per row	Dimensions	
	A	B
10	26.00	8.00
14	30.00	12.0
16	32.00	14.0
20	36.00	18.0
24	40.00	22.0
26	42.00	24.0
30	46.00	28.0
40	56.00	38.0
44	60.00	42.0
50	66.00	48.0
60	76.00	58.0
64	80.00	62.0

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.		
APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖 <i>Helen</i>		SCALE 比例 參考	0 ± 0.25 .00 ± ANG ±
DATE 制表日 2014/7/31	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 C9000-XXRGB000R
	PAGE 張數 1 OF 1	REV. 版本 B	

1 2 3 4 5 6 7 8