


1. MATERIAL :
- 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS
 - 1-4. O-RING : EPDM ; COLOR : BLACK
 - 1-5. BACK HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-6. DOWN HOUSING : PBT UL94V-0 ; COLOR : BLACK
2. FINISH :
- 2-1. CONTACT : SEE TABLE A
 - 2-2. NUT : NICKEL 80u"~100u" ON OVER ALL
3. ELECTRICAL SPECIFICATION :
- 3-1. Rated current : 5A
 - 3-2. Rated voltage : 125V
 - 3-3. Water proof : IPX7
 - 3-4. INSULATION RESISTANCE: 1000MΩ MIN
 - 3-5. DIELECTRIC WITHSTANDING VOLTAGE : 800V
 - 3-6. CONTACT RESISTANCE : < 10mΩ
4. Environmental :
- 4-1. Operation Temperature : -40°~+85°

SEE TABLE A

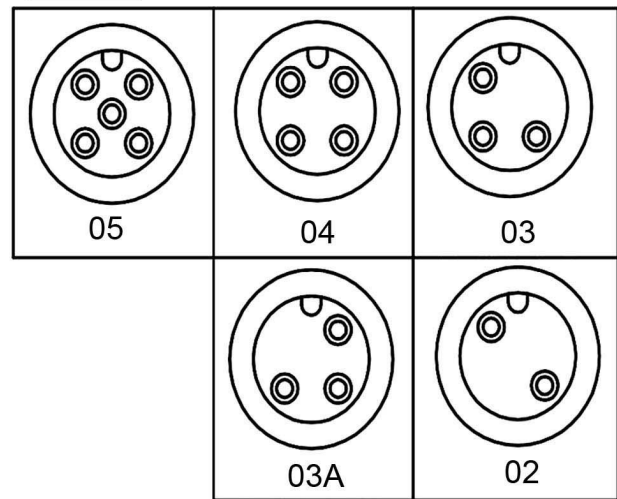

C9301-03FABB00R	GOLD 10u"
C9301-05FABB00R	GOLD 10u"
C9301-04FABB00R	GOLD 10u"
C9301-03AFABB00R	GOLD 10u"
C9301-05FAGB00R	GOLD FLASH
C9301-04FAGB00R	GOLD FLASH
C9301-03FAGB00R	GOLD FLASH
C9301-03AFAGB00R	GOLD FLASH
PART NO	FINISH

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 參考	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°	PART NAME 品名 M12*1.0 5PIN FEMALE PANEL MOUNT IP67 WATERPROOF TYPE A-Code DIP 90° TYPE (Lock:M15*1.0mm) BLACK COLOR ROHS
DWG. 製圖 Betty	UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO.
DATE 制表日 2020/02/06	PAGE 張數 1 OF 1	REV. 版次 A	料號 C9301-XXFAXB00R