


SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: PA6T
 Contact Material : Brass
 Contact plating : Au or Sn over 50u" Ni

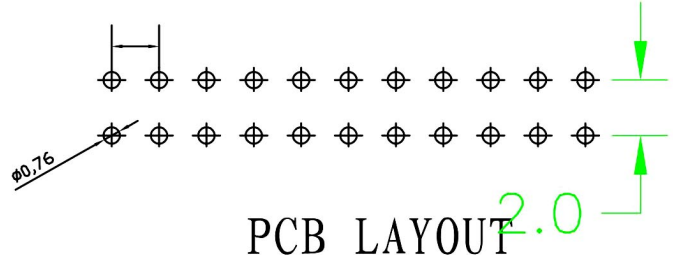

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 DATE 制表日 2020/06/12	Betty 2020/06/12	TOLERANCE X: ±0.30 XX: ±0.20 X*: ±1' XXX: ±0.15 XX*: ±0.05' XXXX: ±0.05 SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1 REV. 版次 A	PART NAME 品名 BOX HEADER 2.0mm X 2.0mm XXPIN RIGHT ANGLE TYPE GOLD PLATING BLACK COLOR NYLONT 6T ROHS PART NO. 料號 C9510-XXRNGB00R