
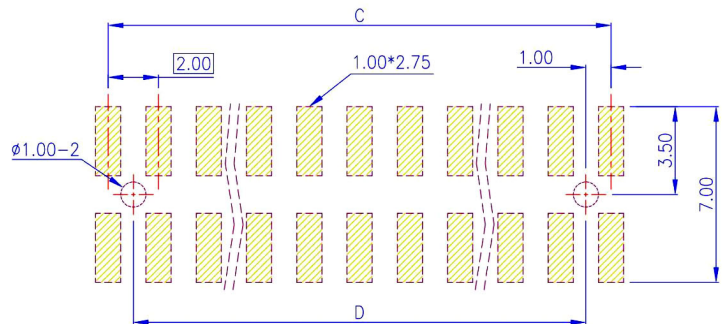


10 Pin

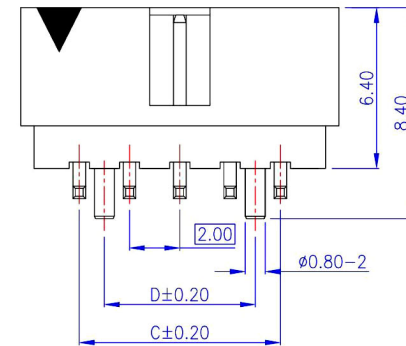

PCB Layout
(Top View)

Dimension				
Pos.	A	B	C	D
10	12.65	10.85	8.00	6.00
14	16.65	14.85	12.00	10.00
16	18.65	16.85	14.00	12.00
24	26.65	24.85	22.00	20.00
26	28.65	26.85	24.00	22.00
30	32.65	30.85	28.00	26.00

Material and Finish	Electrical Characteristics	Mechanical Characteristics
1. Housing: NY6T (UL94V-0), Black. 2. Terminal: Sq. 0.50mm Copper Alloy, Gold Plating.	1. Current Rating: 1.0 Amp. Max.. 2. Dielectric Withstand Voltage: 800V AC RMS for 60Seconds. 3. Insulation Resistance: 1000M Ohms Min. at 500V DC.	1. Operating Temperature: -55°C ~ +105°C

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准
BETTY

DWG.
製圖
BETTY

DATE 制表日
2010/01/19

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
0.0 ±0.30
0.00 ±0.20
0.000 ±0.10

SIZE
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名
2.0mm Shrouded Header SMT TYPE H:6.4mm
XXP NYLON 6T GOLD FLASH PLATING
WITH LOCATING PEG BLACK COLOR

PART NO.
料號 C9511-XXDNGBXYR