



T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-top view)

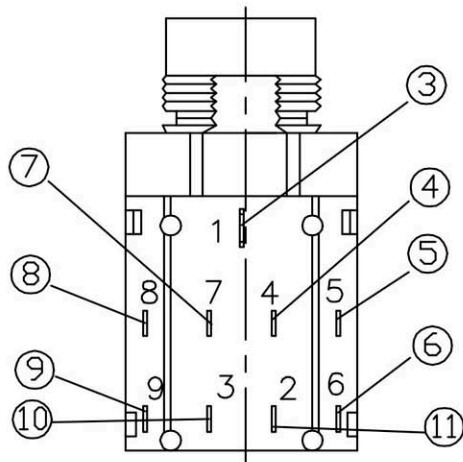

LEAD FREE

10	NUT	1	H59(COPPER ALLOY)	Ni PLATED
9	TERMINAL	1	C5191 t=0.4	Ag PLATED
8	TERMINAL	1	C5191 t=0.3	Ag PLATED
7	RING SPRING	1	C5191 t=0.35	Ag PLATED
6	EARTH TERMINAL	1	C2680 t=0.4	Ag PLATED
5	BREAK TERMINAL	1	C5191 t=0.35	Ag PLATED
4	TIP SPRING	1	C2680 t=0.4	Ag PLATED
3	EARTH TERMINAL	1	C5191 t=0.3	Ag PLATED
2	COVER	1	ABS	UL-94HB(BLACK)
1	HOUSING	1	ABS	UL-94HB(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK

Specification:
 Rated Voltage / Rated Current: D.C. 12V 1A
 Operating Temp: -40°C~+70°C
 Insulation Resistance: 100MΩ min
 Dielectric Withstanding Voltage: 500V A.C For 1min
 Contact Resistance: 30mΩ max
 UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 3°	PART NAME 品名 6.4Φ PHONE JACK 9P W/ PLASTIC INSULATOR W/ 4 POSTS SILVER PLATING BLACK INSULATOR ROHS
DWG. 製圖 Helen	UNIT 單位 MM	SIZE 線規尺寸 A4	PART NO. 料號 C9602-09PCVB00R
DATE 制表日 2020/9/4	PAGE 張數 1 OF 1	REV. 版本 B	