




NOTES

- \* Poles: 2x4~2x25
- \* Material: NYLON 66UL94V-0 BLACK

Specifications

- \* Current rating: 1A AC, DC
- \* Voltage rating: 250V AC, DC
- \* Temperature range: -25°C~+85°C
- \* Insulation resistance: 1,000MΩ min.
- \* Withstand voltage: 800V AC/minute

CKTS	DIM. "A"	DIM. "B"
8	6.00	8.2
10	8.00	10.2
12	10.00	12.2
14	12.00	14.2
16	14.00	16.2
18	16.00	18.2
20	18.00	20.2
22	20.00	22.2
24	22.00	24.2
26	24.00	26.2
28	26.00	28.2
30	28.00	30.2
32	30.00	32.2
34	32.00	34.2
36	34.00	36.2
40	38.00	40.2
42	40.00	42.2
44	42.00	44.2
46	44.00	46.2
48	46.00	48.2
50	48.00	50.2

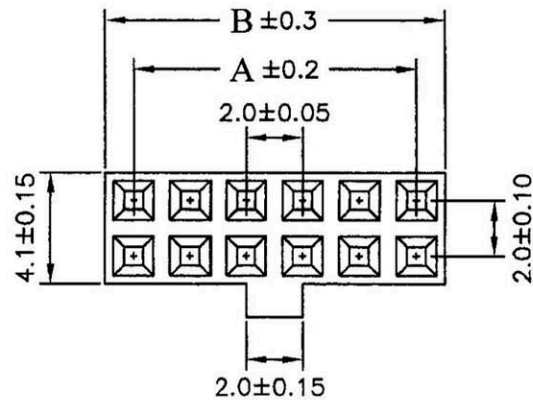

<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 Betty		TOLERANCE 容許公差 0. ± 0.50 0.0 ± 0.30 0.00 ± 0.20	PART NAME 品名 2.0mm HOUSING DUAL ROW 2XXXP WITH BUMP BLACK INSULATOR NYLON66 UL94-V0 ROHS
DWG. 製圖 Lena	SCALE 比例 參 考	UNIT 單位 MM	SIZE 紙張尺寸 A4
DATE 制表日 2022/5/13	PAGE 張數 1 OF 1	REV. 版本 B	PART NO. 料號 H1002-XXPDB005R