
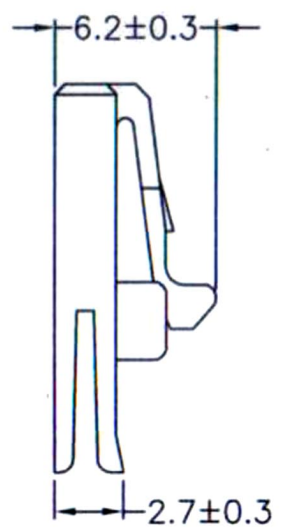
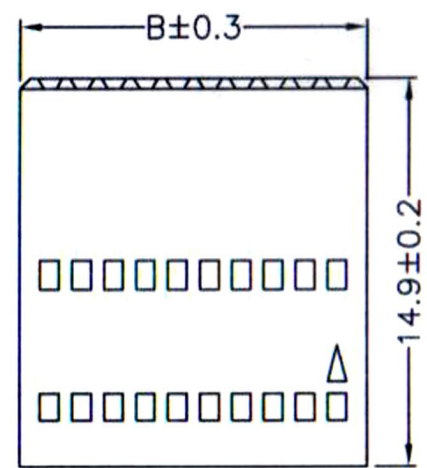
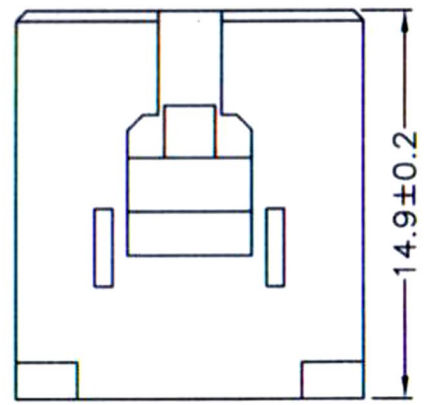


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

* Poles: 4~30P
 * Material: PBT 94V-0 Black
SPECIFICATIONS
 * Current rating: 1A AC DC
 * Voltage rating: 100V AC DC
 * Temperature range: -25°C~+85°C
 * Insulation resistance: 1,000MΩ min.

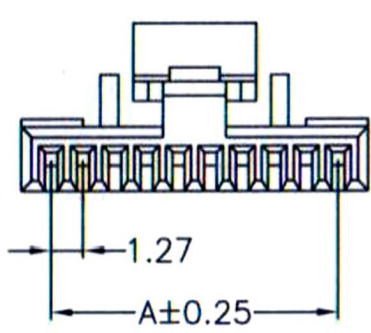

CIRCUITS	Dim. A	Dim. B
4	3.81	6.15
5	5.08	7.42
6	6.35	8.69
7	7.62	9.96
8	8.89	11.23
9	10.16	12.50
10	11.43	13.77
11	12.70	15.04
12	13.97	16.31
13	15.24	17.58
14	16.51	18.85
15	17.78	20.12
16	19.05	21.39
17	20.32	22.66
18	21.59	23.93
19	22.86	25.20
20	24.13	26.47
21	25.40	27.74
22	26.67	29.01
23	27.94	30.28
24	29.21	31.55
25	30.48	32.82
26	31.75	34.09
27	33.02	35.36
28	34.29	36.63
29	35.56	37.90
30	36.83	39.17

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE .0 ±0.30 .00 ±0.20 .000 ±0.10	PART NAME 品名 1.27mm FFC/FPC HOUSING SINGLE ROW 1XXXP WITH LOCKING RIBS PBT UL94-V0 BLACK INSULATOR ROHS
DWG. 製圖	UNIT 單位	SIZE 紙張尺寸	PART NO.
DATE 制表日	PAGE 張數	REV. 版次	料號
2017/08/18	1 OF 1	A	H1271-XXPYBP00R

1 2 3 4 5 6 7 8