

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C



D

E

F



G

H

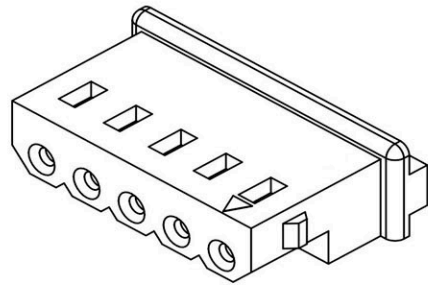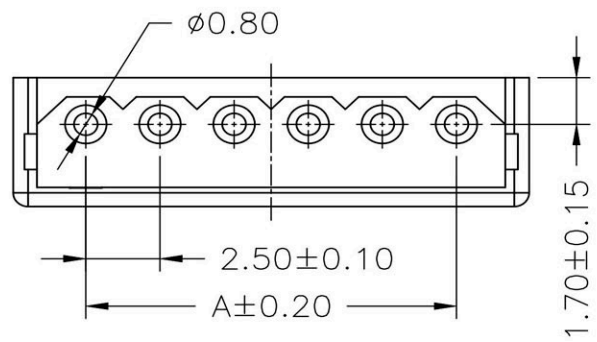


SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass, Tin-plated
 Insulation Material: Nylon66-V0, Beige(7506C)

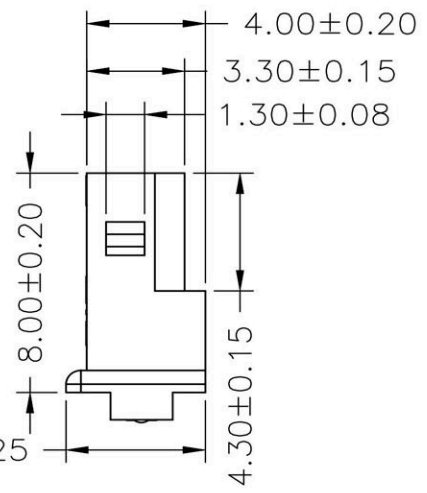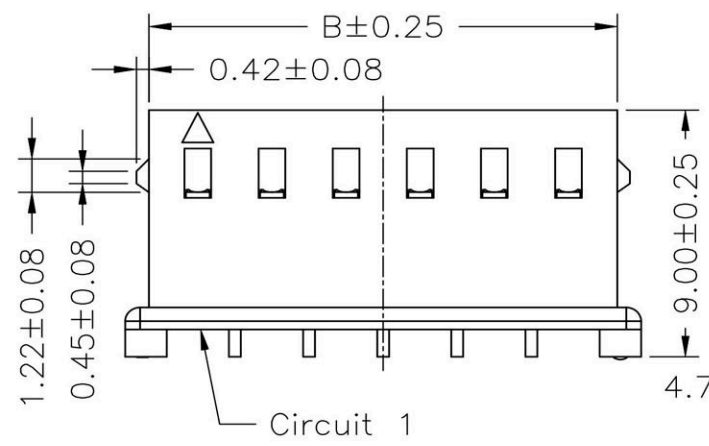

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02P	2.50	5.80	10P	22.50	25.80
03P	5.00	8.30	11P	25.00	28.30
04P	7.50	10.80	12P	27.50	30.80
05P	10.00	13.30	13P	30.00	33.30
06P	12.50	15.80	14P	32.50	35.80
07P	15.00	18.30	15P	35.00	38.30
08P	17.50	20.80	16P	37.50	40.80
09P	20.00	23.30			

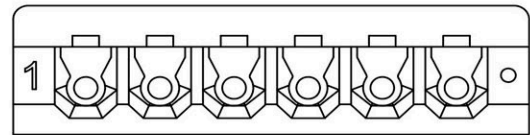

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准
 DWG. 製圖 *Helen*
 DATE 制表日
 2022/6/8

SCALE 比例 參考
 UNIT 單位 MM
 PAGE 張數 1 OF 1

TOLERANCE 容許公差
 0 ± 0.35
 .00 ± 0.25
 ANG. ± 3°
 SIZE 紙張尺寸 A4
 REV. 版本 A

PART NAME 品名
 2.5mm HOUSING 1X6P BEIGE COLOR ROHS

PART NO.
 料號 H2530-XXPC0000R

1 2 3 4 5 6 7 8