
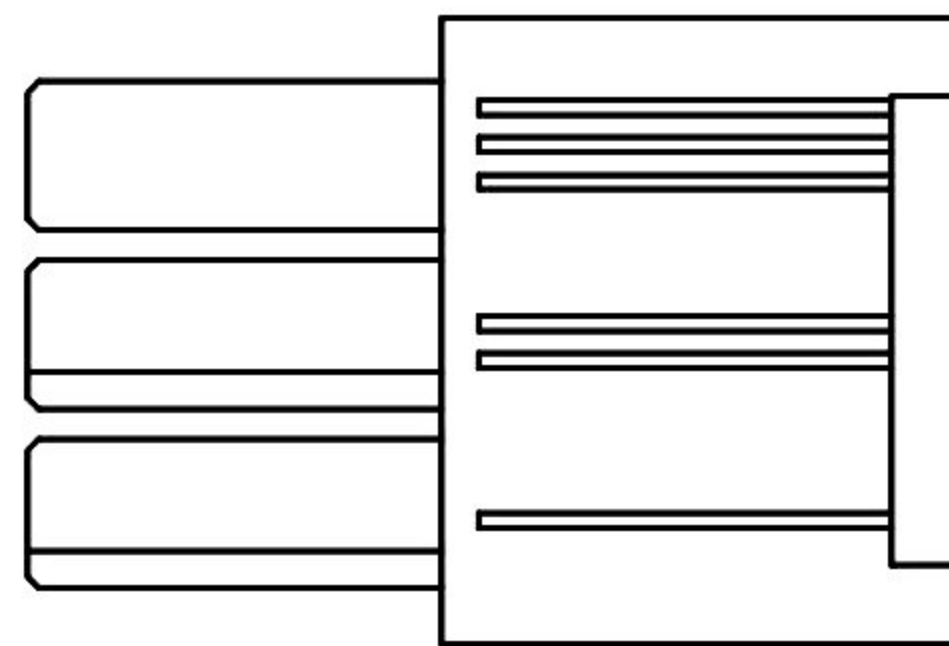


**Specifications:**

Material: Polyester, UL 94V-2  
 Voltage Rating: 250V  
 Current Rating: 6A  
 Withstand Voltage: 1500V AC/Minute  
 Insulation Resistance: 1000MΩ min.  
 Temperature Range: -25°C~+85°C  
 Contact Resistance: Initial value/10m max.  
 After environmental testing/20mΩ max.  
 Applicable Wire:AWG#18 TO #24

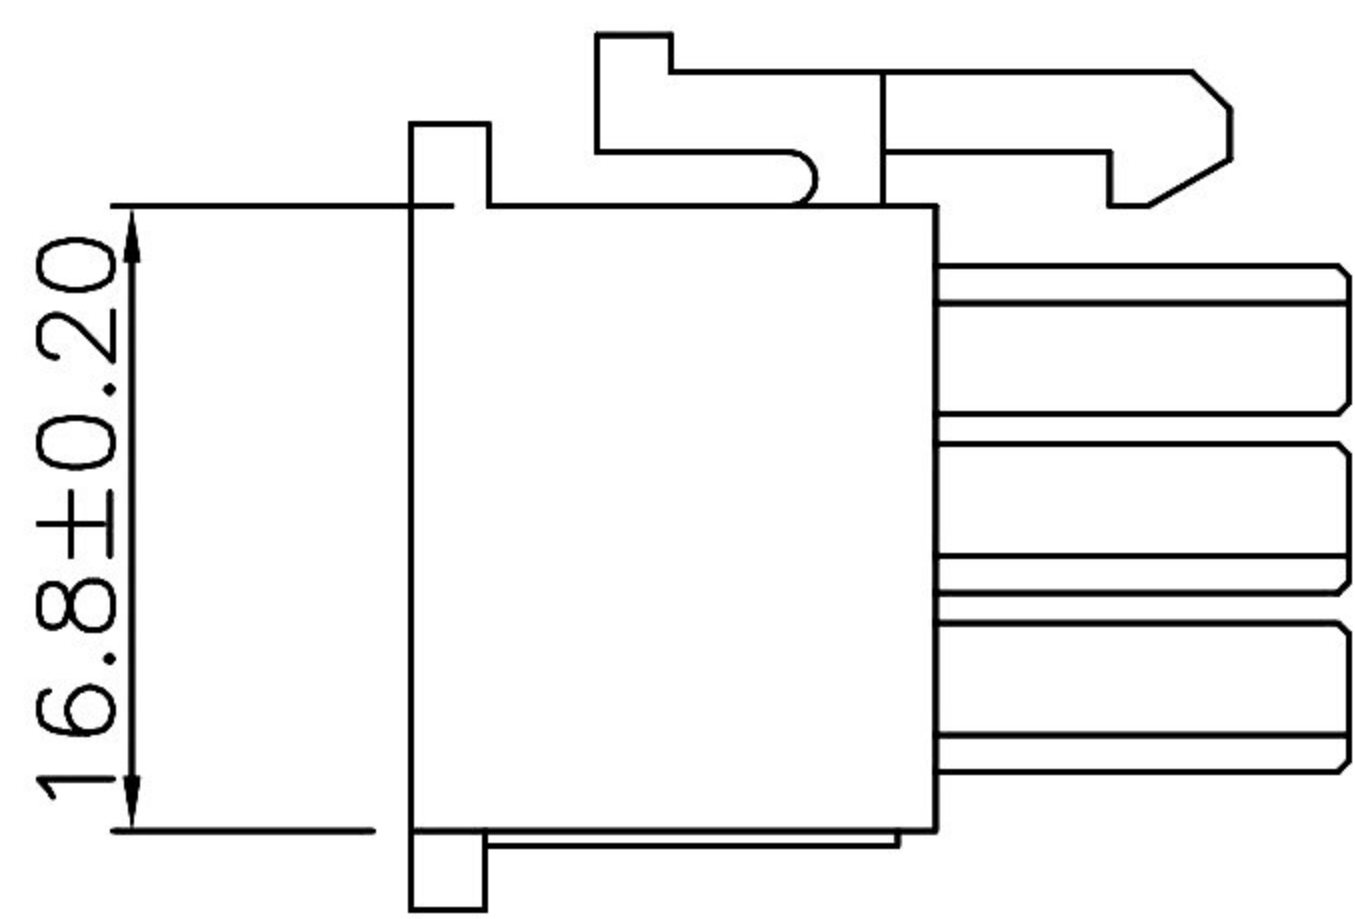

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE 容許公差 .000 : .00 : .0 :	PART NAME 品名 4.8mm MALE HOUSING 3X3P WHITE INSULATOR NYLON66 UL94-V2 ROHS
DWG. 製圖 ABBY			
DATE 制表日 2016/07/11	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 H4801-09MTW000R