



HOUSING

- Material: Nylon46, UL-94-V0
- Shell: Copper alloy/Nickel Plated
- Pitch: 1.0mm (0.39")
- Poles: 30

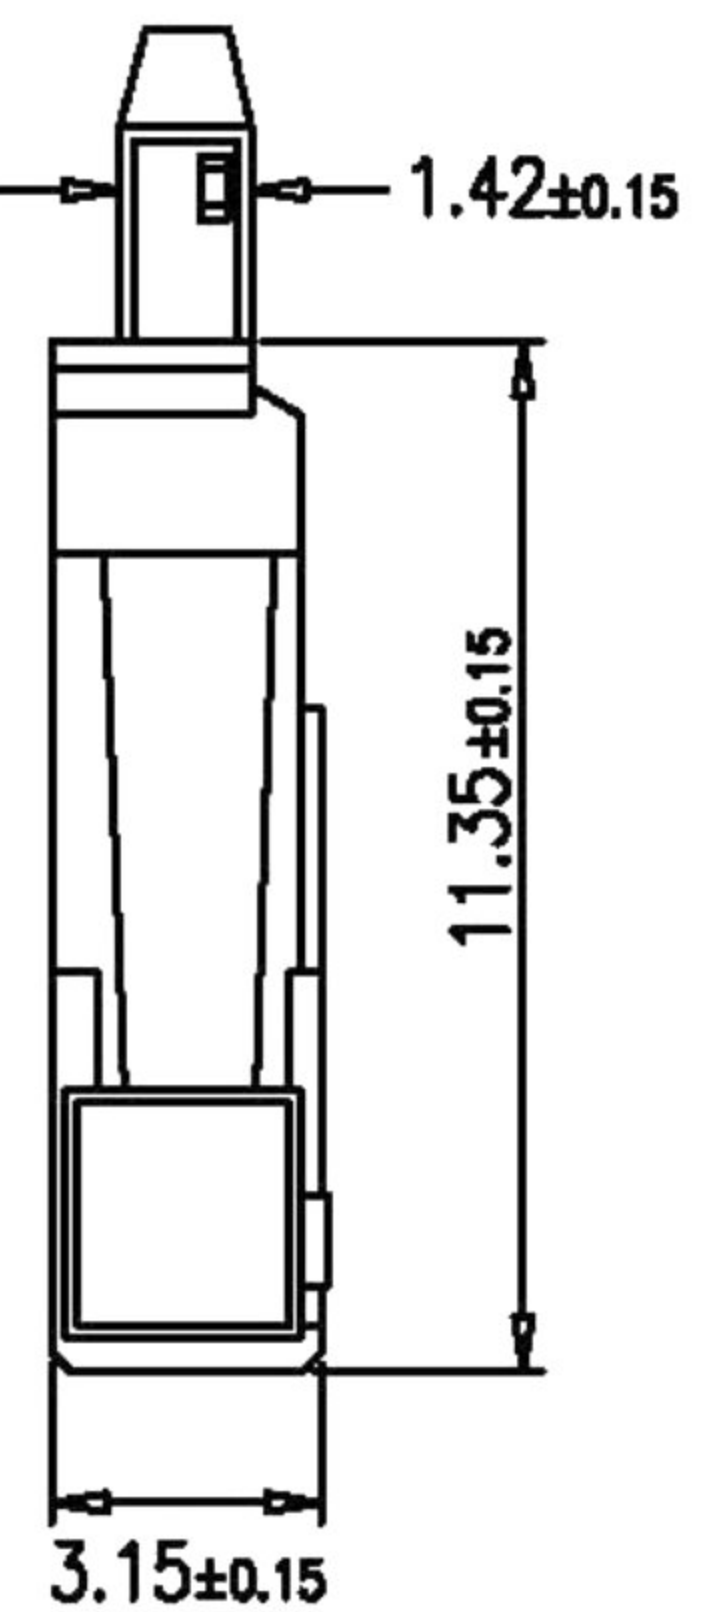

SPECIFICATIONS

- Voltage rating: 200V AC/DC
- Current rating: 1A
- Withstand Voltage: 500V AC/minute
- Contact resistance: 40m Ohm max.
- Insulation Resistance: 100M Ohm min.
- Temperature Range: -25 ~ +85°C

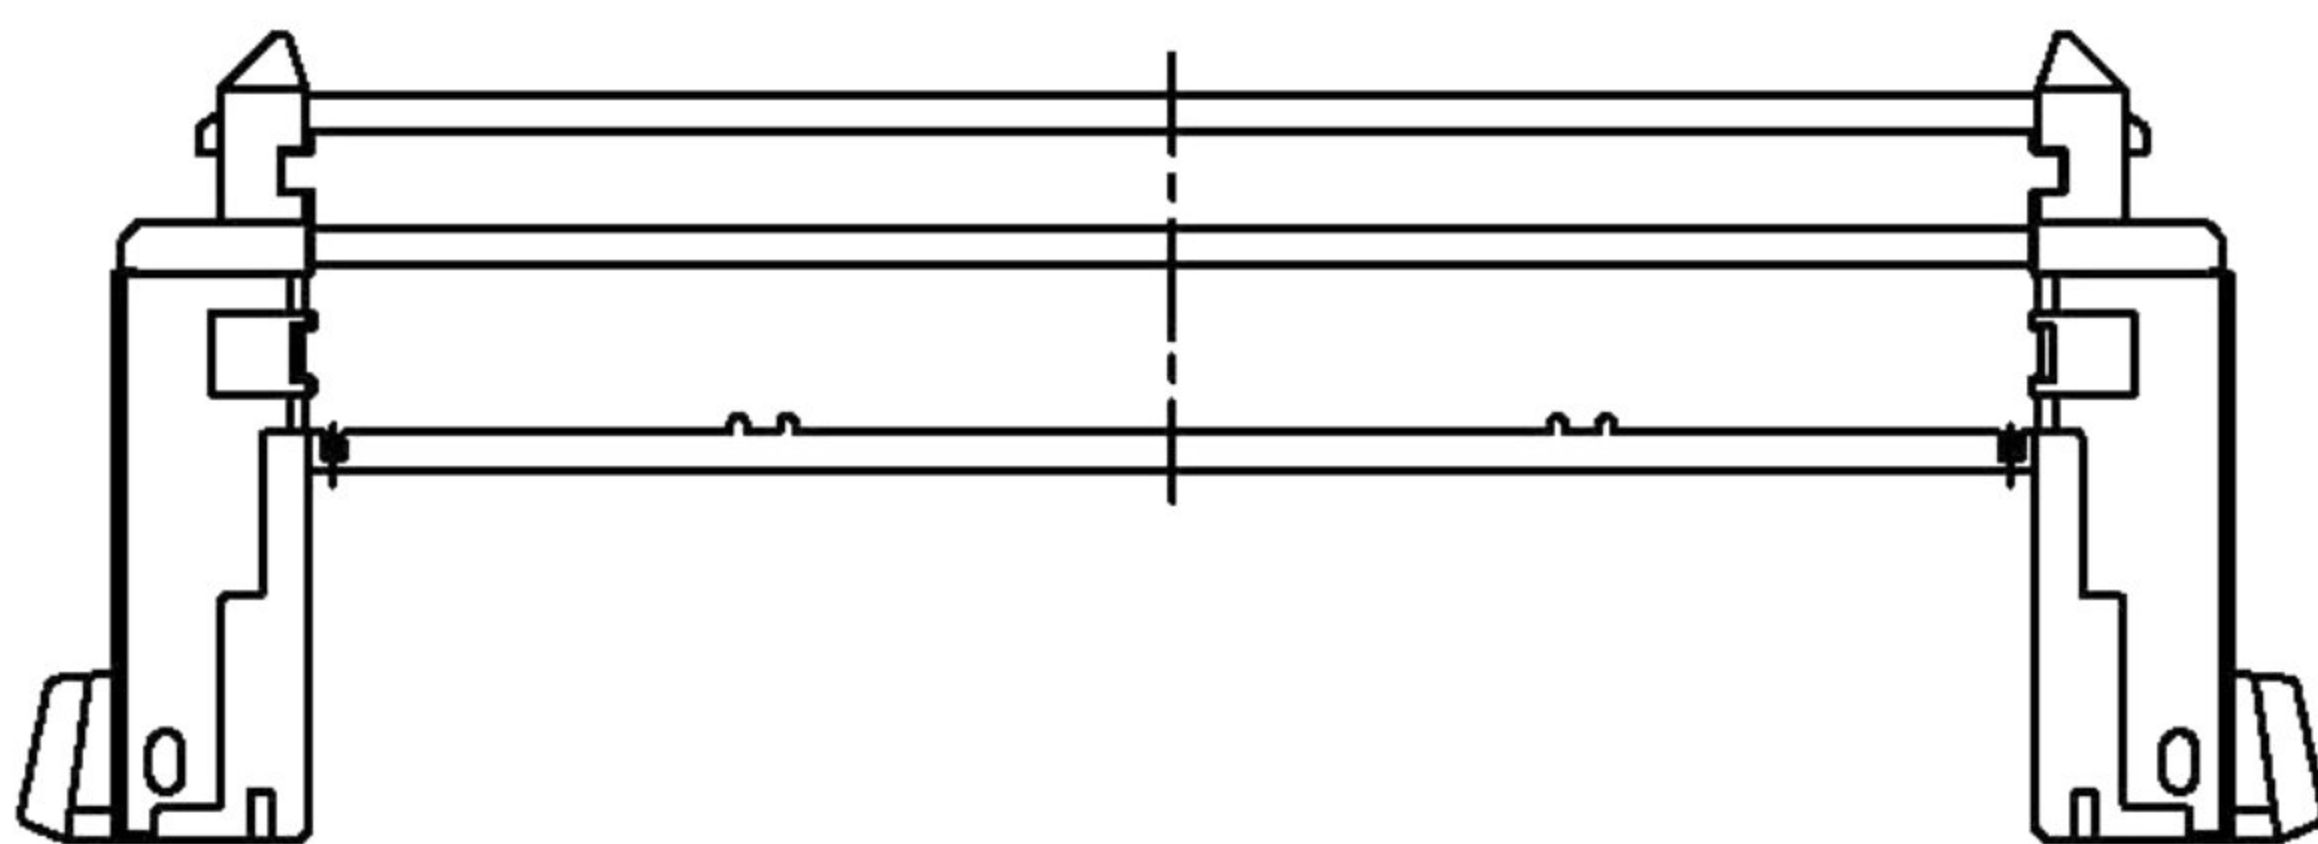

RoHS Compliant		HSM 玄茂科技股份有限公司	
		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCES UNLESS NOTED	
DWG. 製圖 ABBY		LINEAR ± .0 ± 0.25 .00 ± 0.15 .000 ± 0.08	PART NAME 品名 1.0mm LVDS HOUSING 30P WITH LOCK SPRING BLACK INSULATOR MATERIAL : NYLON 46 UL94-V0 ROHS
DATE 制表日 2012/08/10	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 H9013-30PYB000R
	PAGE 張數 1 OF 1	REV. 版次 B	