

Features:





- 4 points contact
- Antu-fishhooking contact design
- Finished: Tin-plated (Lead free)
- Wire range: #22 ~ #28 AWG
- Thickness: 0.25mm
- Q'ty: 5000 PCS / Reel

Specification:

- Current rating: 7A
- Contact resistance: Initial 10mΩ Max.

Ordering Information

Part No.	Material	Wire range	Dim. a	Dim. b	Dim. c	Dim. d
T5081-TBJ00000R	Brass	#22 ~ #28	2.1	1.8	3.2	2.25
T5081-TPJ00000R	Phosphor bronze					

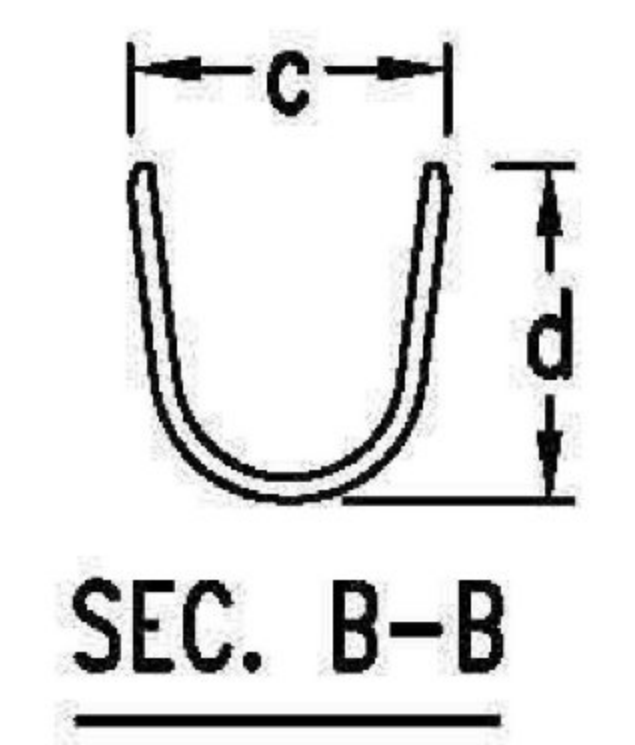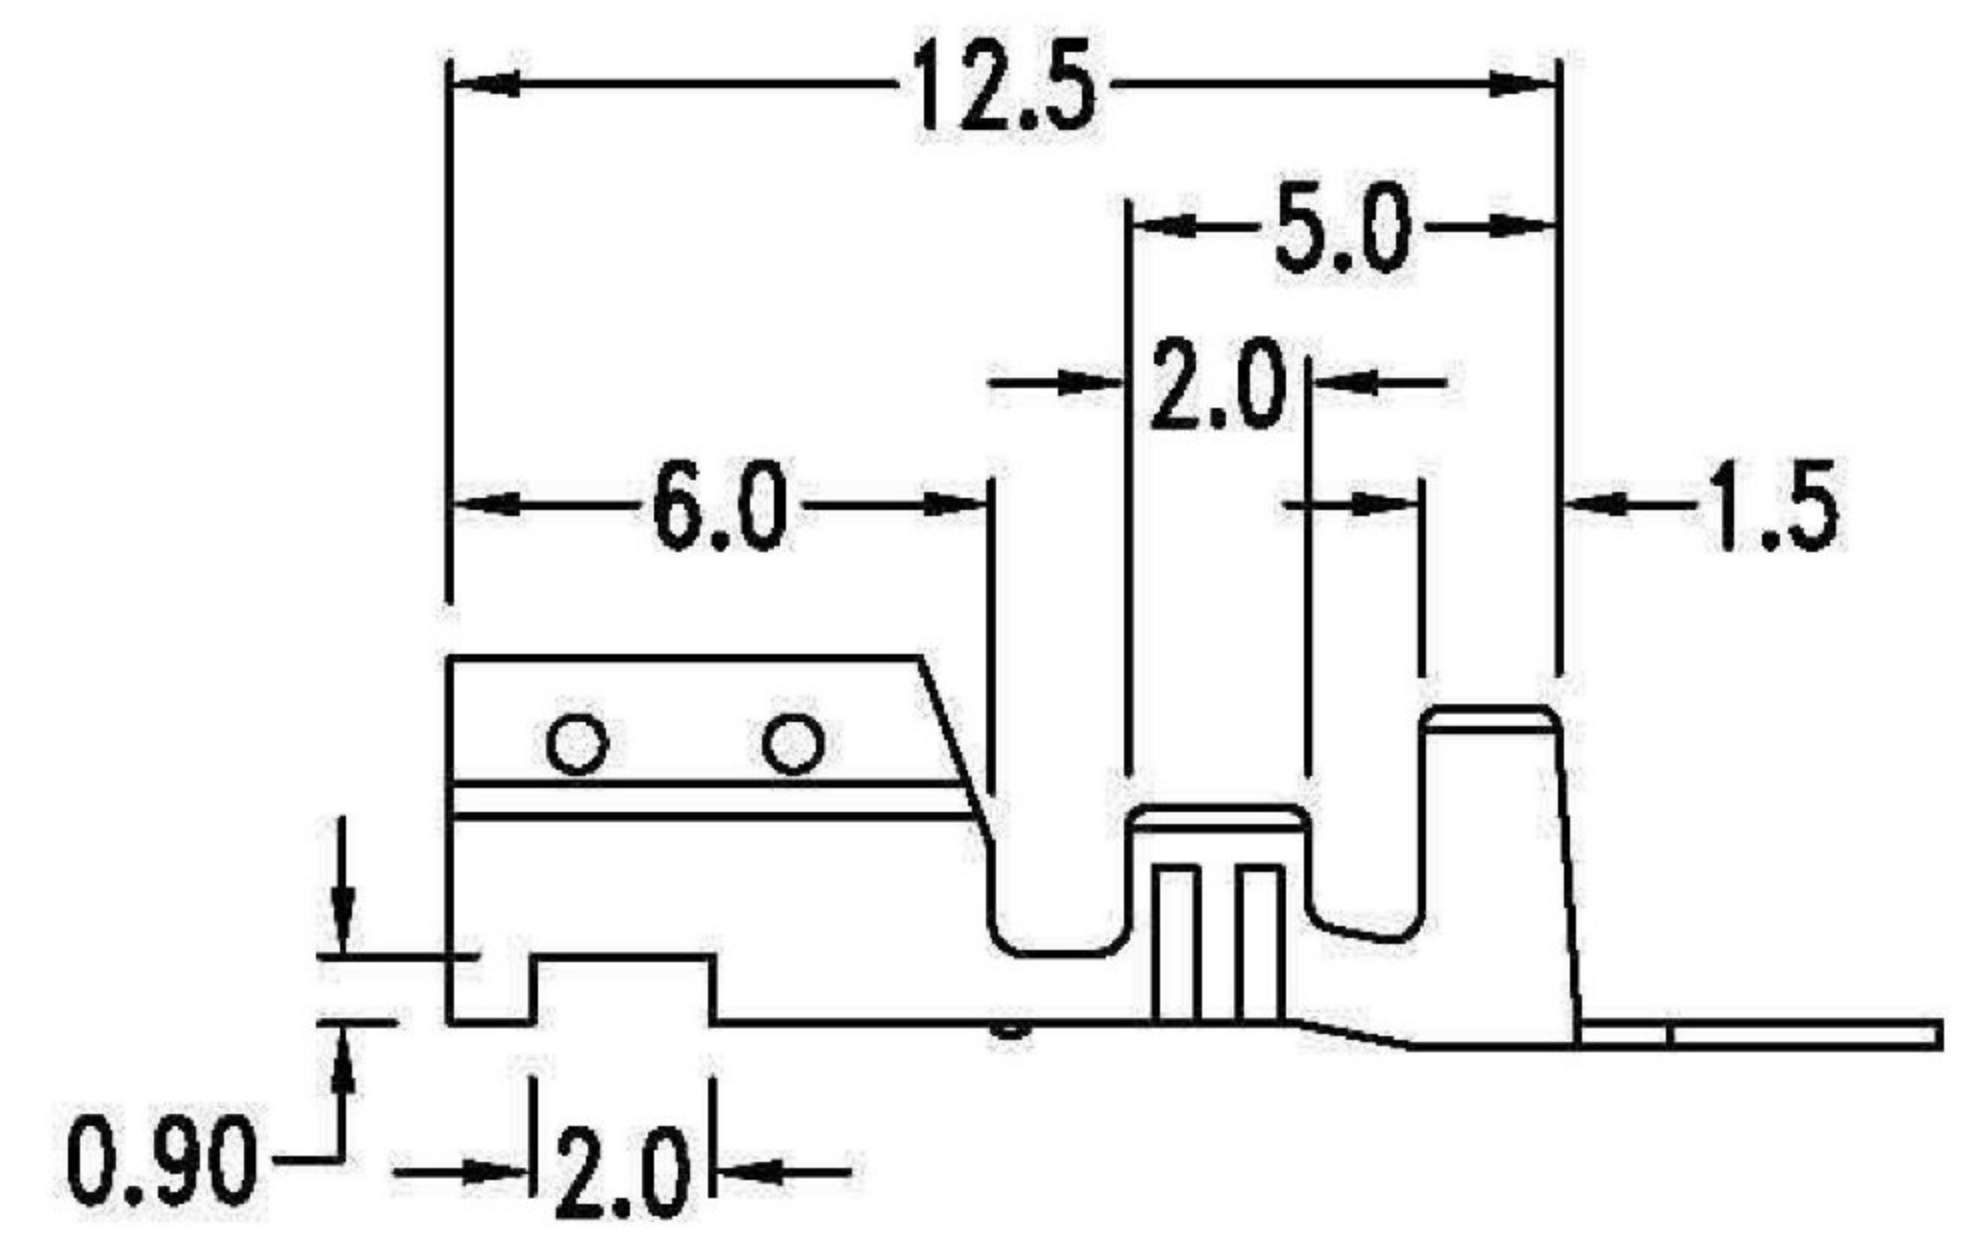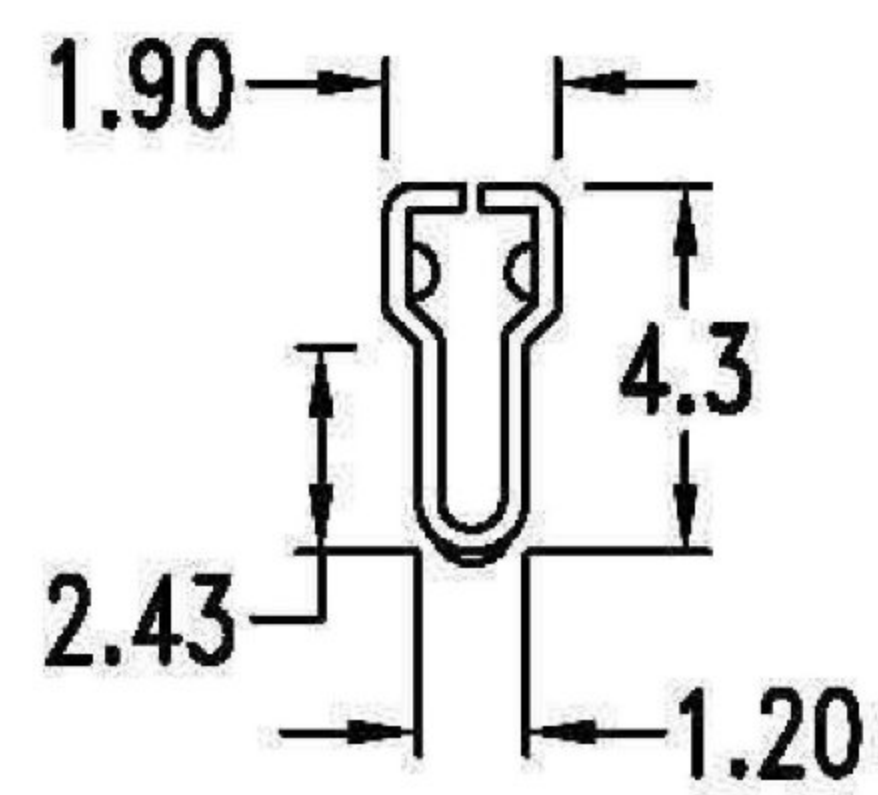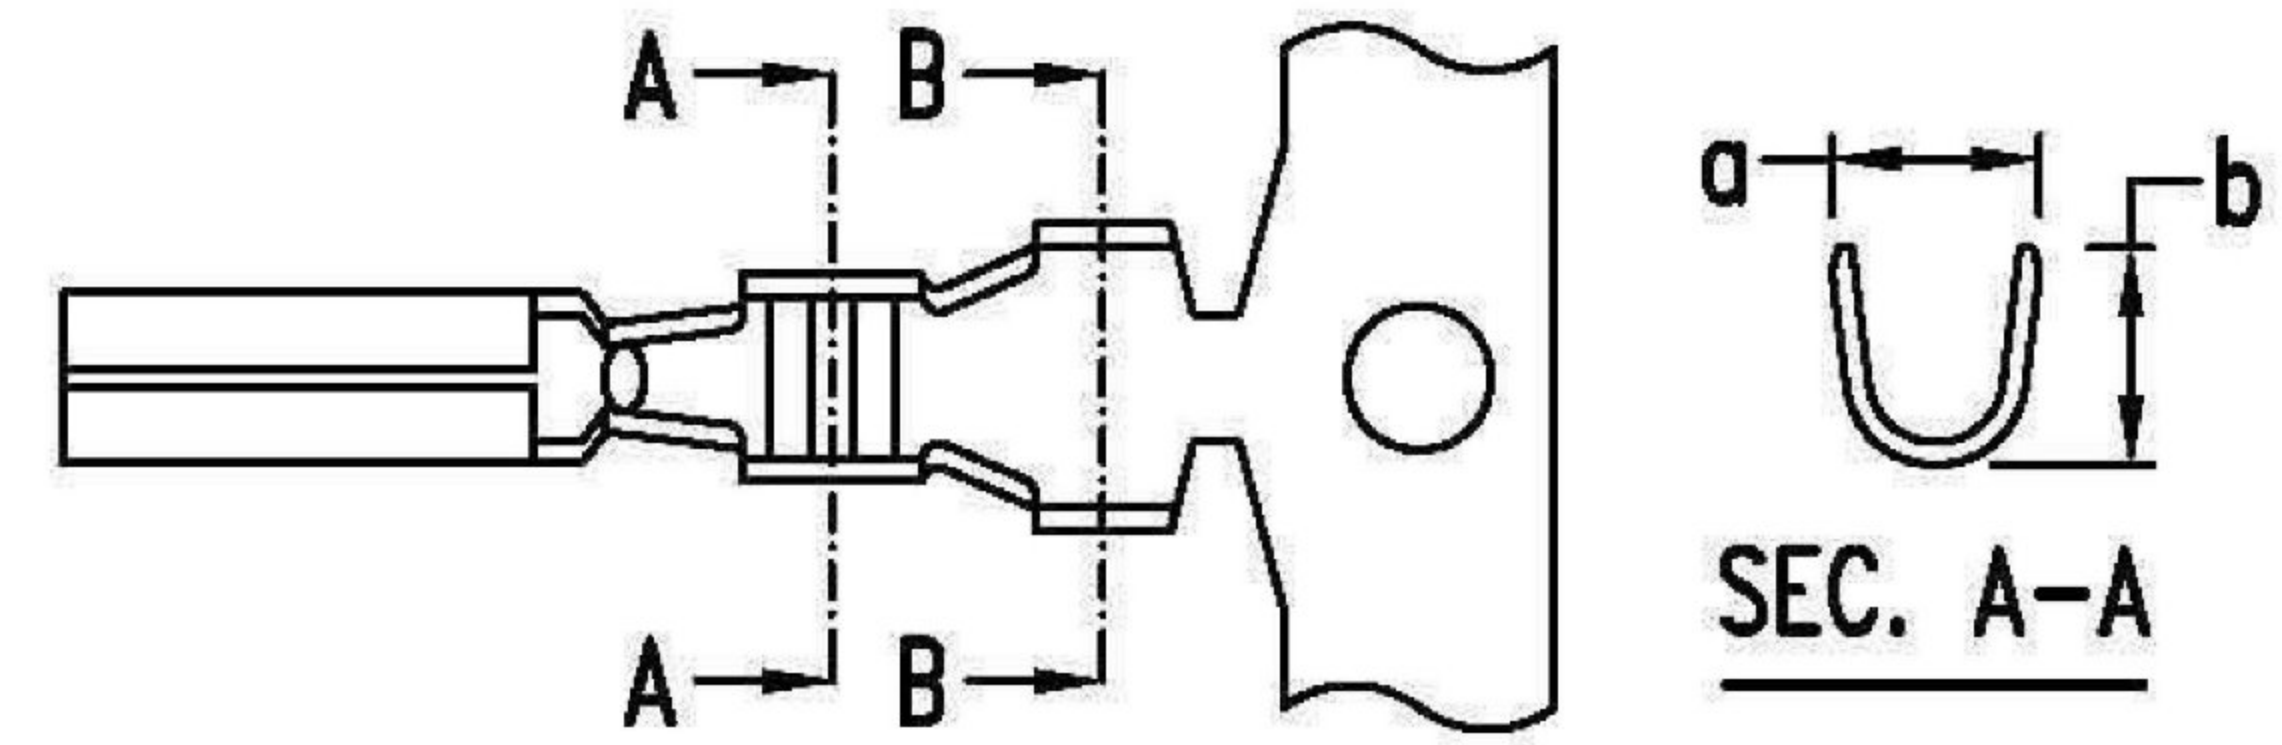

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE 容許公差 .000 ± 0.08 .00 ± 0.25 .0 ± 0.40	PART NAME 品名 3.96mm/5.08mm TERMINAL TIN PLATING SUITABLE AWG22~28 ROHS
DWG. 製圖 ABBY		UNIT 單位 MM	SIZE. 紙張尺寸 A4
DATE 制表日 2017/07/18	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 T5081-TXJ00000R