

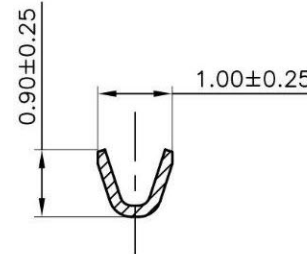


A-A SECTION  
( INSULATION BARREL )

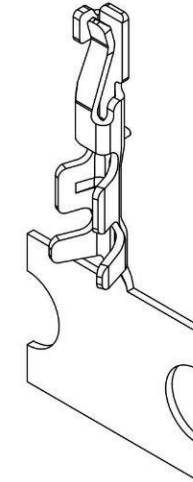

B-B SECTION  
( WIRE BARREL )



■ **TERMINAL**

- Material : Phosphor bronze
- Thickness : 0.15mm
- Plating : Gold plated
- Wire Range : Suitable for AWG#28~32
- Insulation O.D : 0.75mm ( max )
- Q'TY : 15,000pcs/reel

Specification:

Current Rating:1A(max) AC,DC

Voltage Rating:100V (max) AC,DC.

Operating Temp:-35°C~+85°C.

Insulation Resistance:500MΩ min.

Dielectric Withstanding Voltage:300V AC 1 min.

Contact Resistance:30mΩ max.

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	BETTY	 TOLERANCE .x ±0.3 .xx ±0.15 .xxx±0.08 2'	PART NAME 品名 HRS DF19 1.0mm TERMINAL PHOSPHOR BRONZE MATERIAL AWG28-32 GOLD FLASH PLATING ROHS
DWG. 製圖	KAREN		
DATE 制表日	2015/06/23	UNIT 單位	MM
		PAGE 張數	1 OF 1
		SCALE 比例	參考
		SIZE. 紙張尺寸	A 4
		REV. 版本	A
		PART NO. 料號	T9012-GPP00000R