
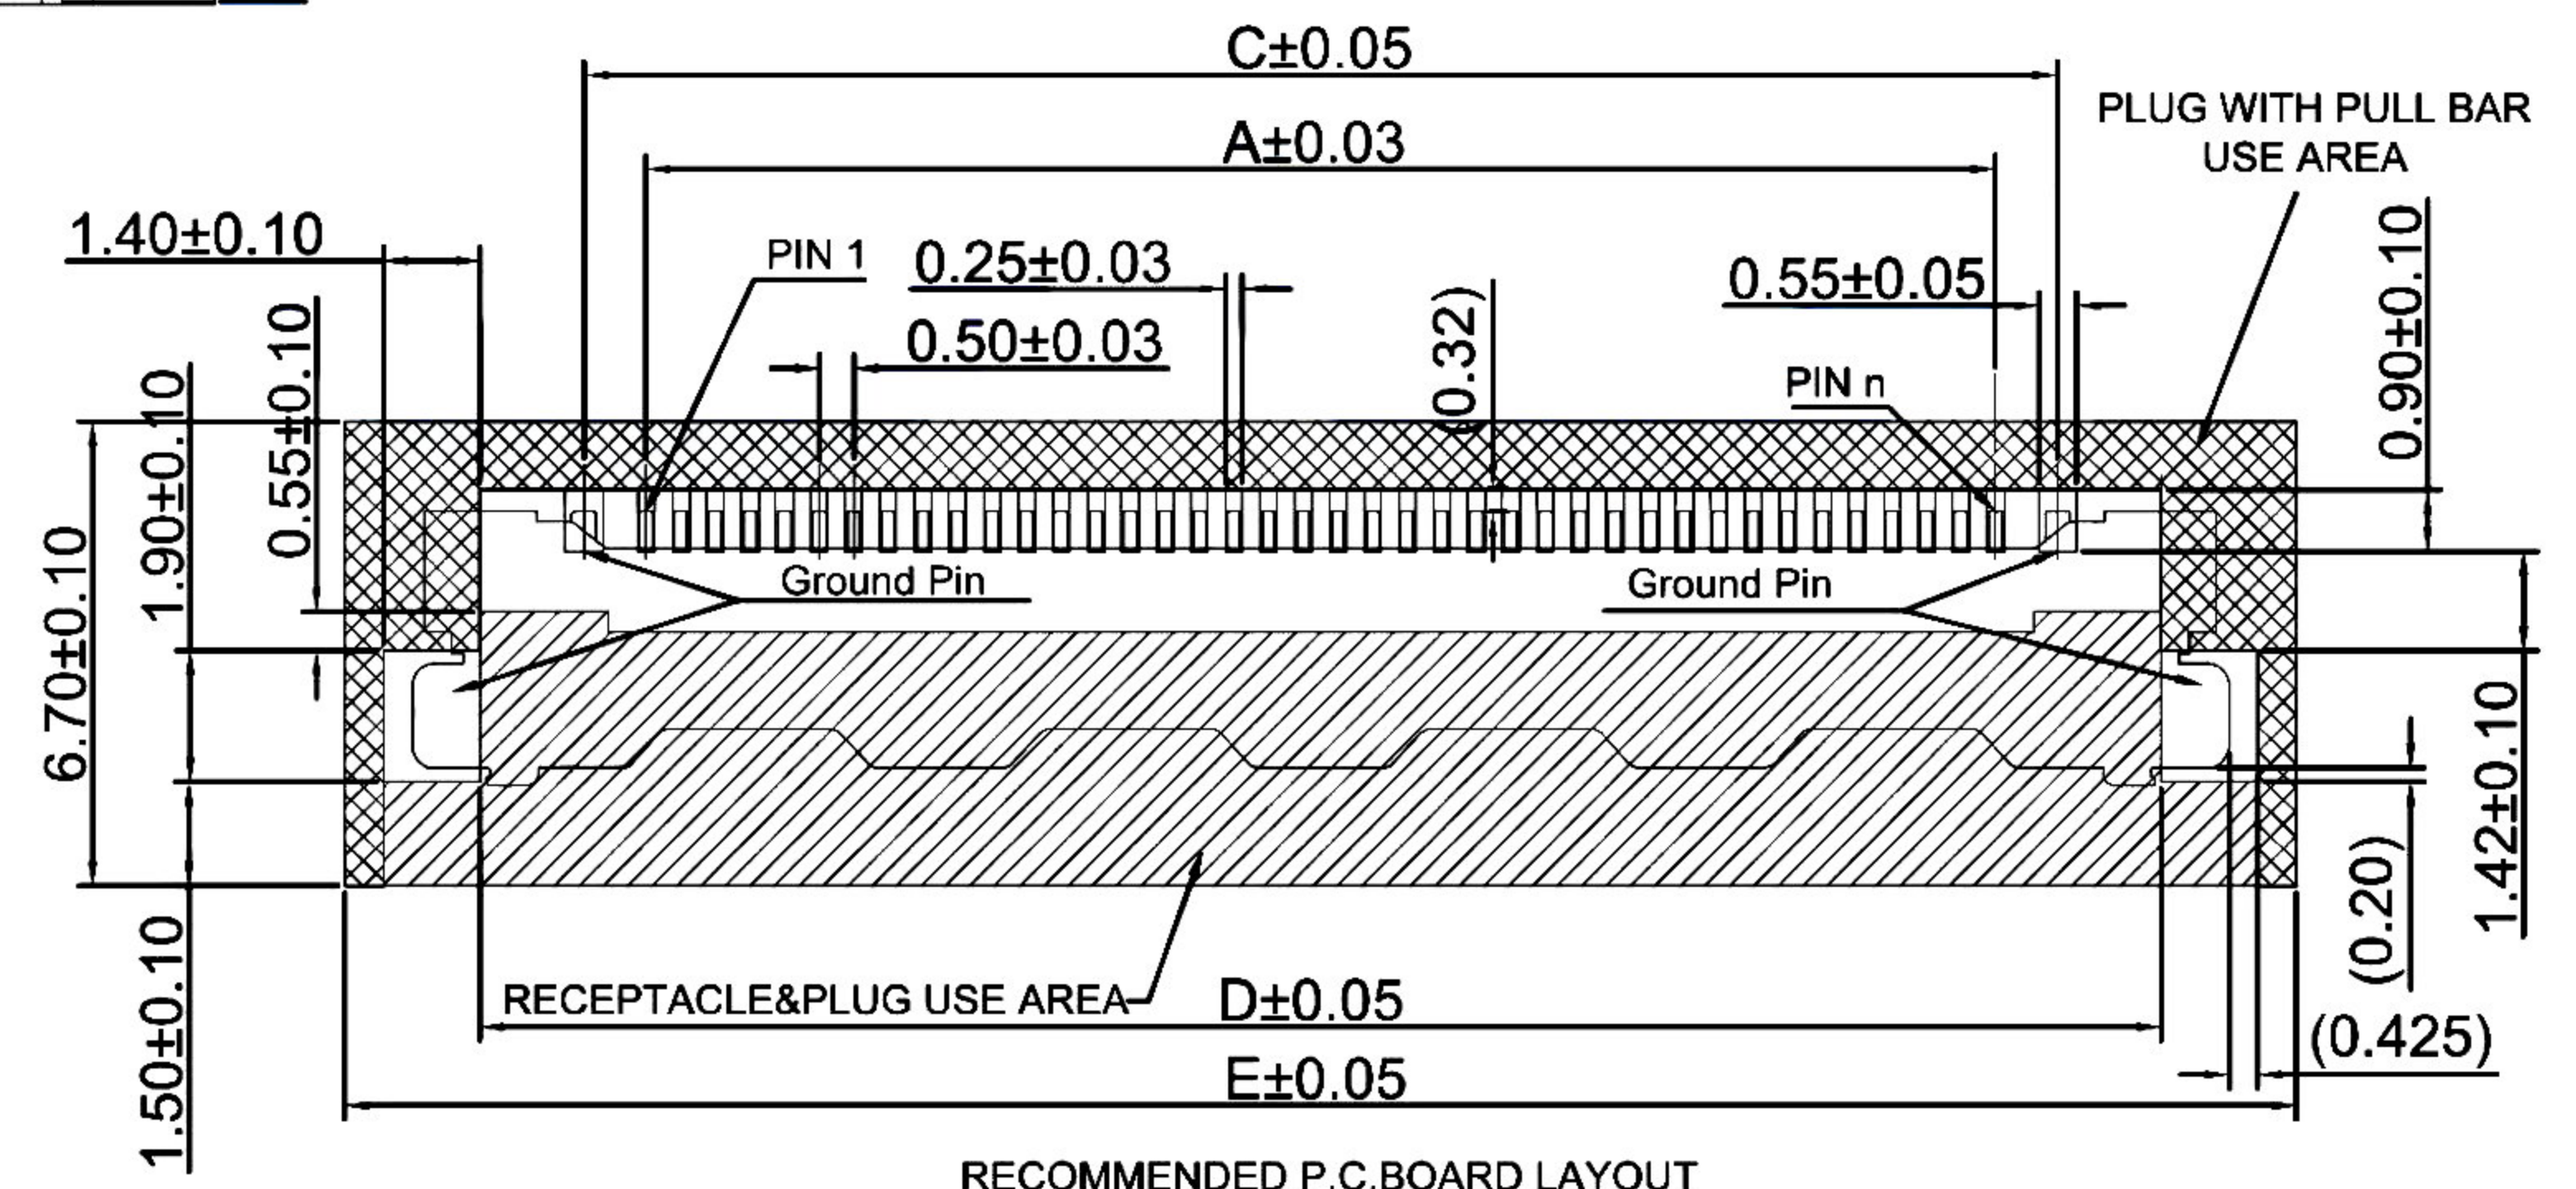
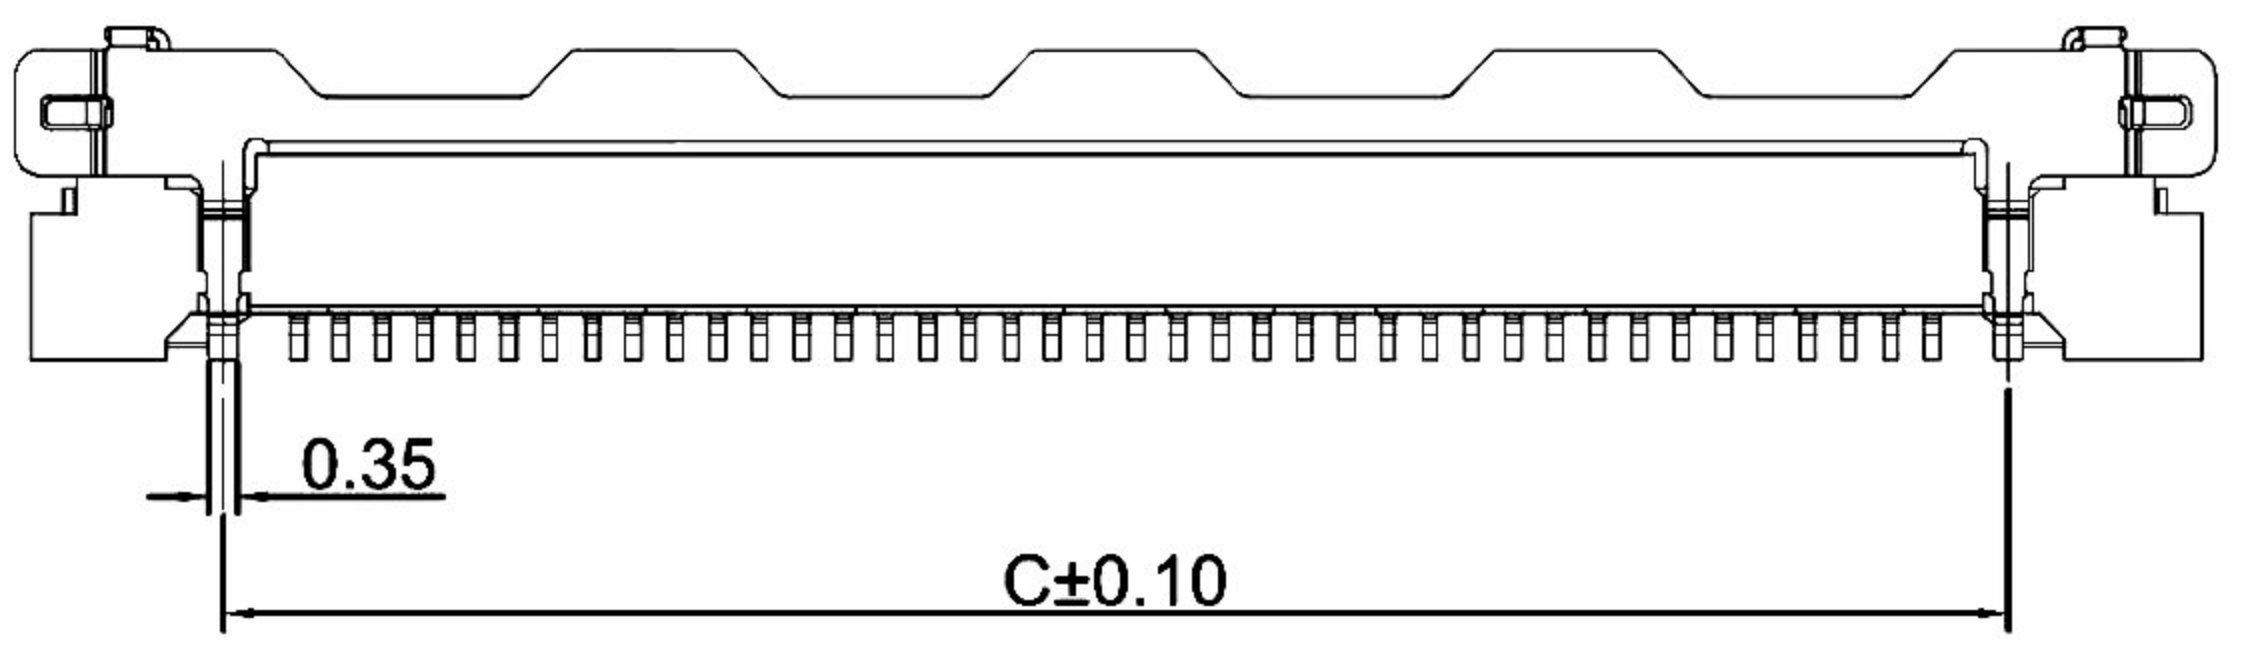
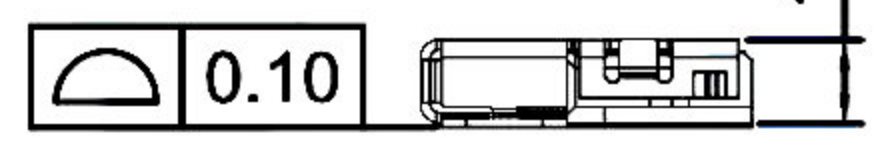
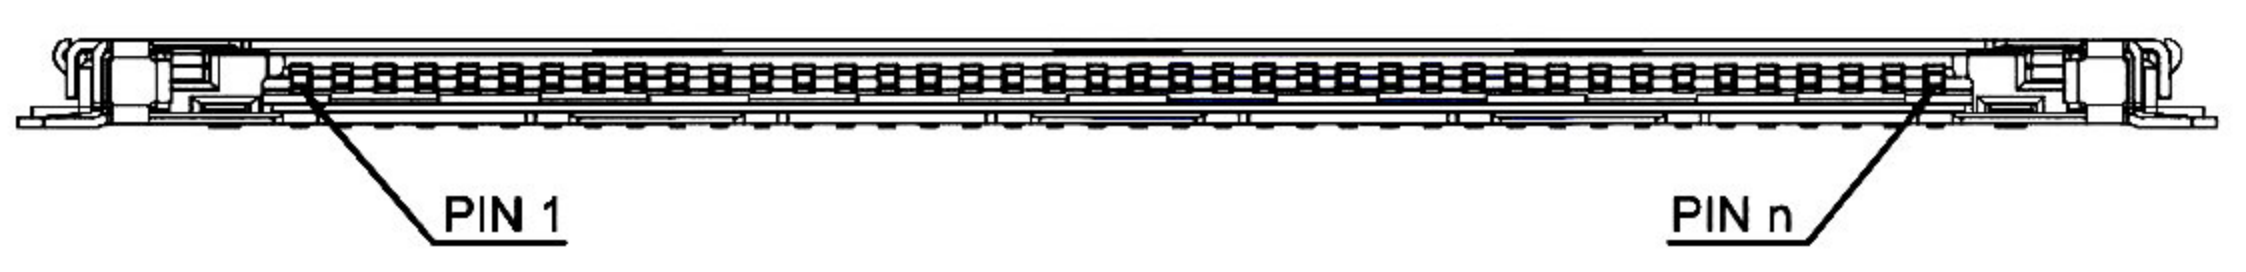


- SPEC.:
- Rated Voltage:100V AC,DC
 - Rated Current:1A AC,DC
 - Withstand Voltage:250V AC/minute
 - Contact Resistance:50mΩ max
 - Insulation Resistance:1000MΩ min
 - Temperature Range:-40℃~+85℃

- Material:
- Insulator:LCP UL94V-0,Black
 - Contact Pin:Copper alloy
Finish:Gold-plated,over Nickel
 - Shell:Copper alloy
Finish:Gold-plated,over Nickel

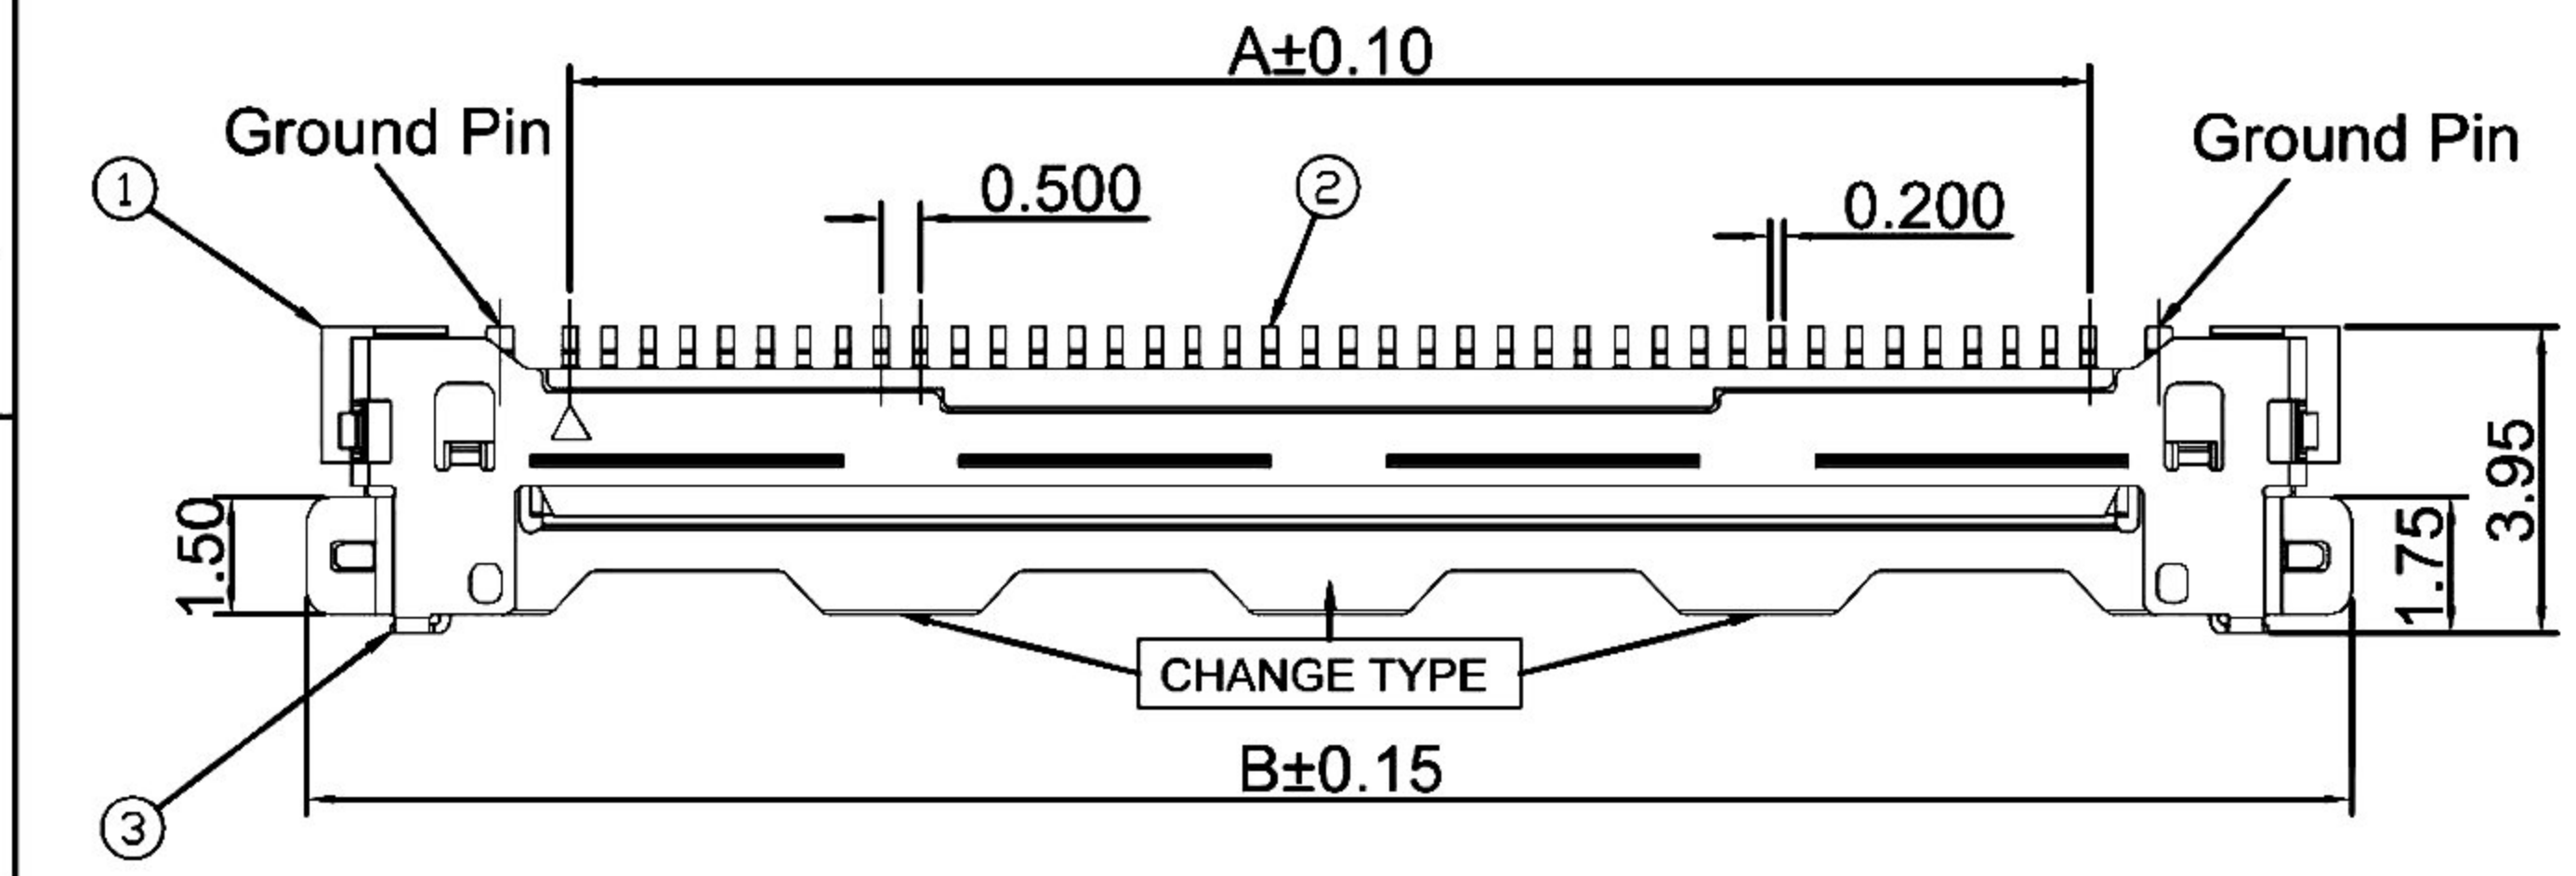

RECOMMENDED P.C.BOARD LAYOUT

NOT VIA/TRACE/TEST POINT AREA RECEPTACLE&PLUG USE AREA
 NOT VIA/TRACE/TEST POINT AREA PLUG WITH PULL BAR USE AREA

Poles	A	B	C	D	E
30	14.50	21.25	16.30	19.30	23.20
40	19.50	26.25	21.30	24.30	28.20
50	24.50	31.25	26.30	29.30	33.20

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN DWG. 製圖 ABBY DATE 制表日 2023/06/15	 SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	TOLERANCE 容許公差 .X=±0.30 .XX=±0.20 .XXX=±0.10 SIZE. 紙張尺寸 A4 REV. 版次 A	PART NAME 品名 0.5MM LVDS WAFER 40PIN SMT RIGHT ANGLE TYPE GOLD FLASH PLATING MATERIAL:LCP BLACK COLOR REEL PACKING ROHS PART NO. 料號 W1007-40PBGNBRR