

Features:

- 4 - 16 circuits available
- Material: PA66 UL 94-V2 or 94-V0

Specification:

- Voltage rating: 600V AC, DC
- Contact resistance: 10 mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40℃-105℃

Current rating & wire size:

Wire Size AWG	Rated Voltage	Circuits		
		4 ~ 6	8 ~ 10	12
#18	250V	8A	7A	6A
#20		6A	5A	5A
#22		4A	4A	4A
#24		3A	3A	3A

Ordering Information and Dimensions:

PART NO.	Dimensions		
	A	B	C
04P	4.14	9.83	15.01
06P	8.28	13.97	19.15
08P	12.42	18.11	23.27
10P	16.56	22.25	27.41
12P	20.70	26.39	31.55

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.


APPD.
核准
DWG.
製圖
DATE
制表日
2017/9/11

SCALE
比例
UNIT
單位
PAGE
張數
2 OF 1

TOLERANCE
容許公差
PART NAME 品名
4.14mm WAFER (2X2P~2X16P) 180° WITH LOCATING
PEG WHITE COLOR NYLON 66 UL94V-0 ROH
PART NO.
料號
W1110-(04~12)PDSYW1R

Helen

REV. 版本
A

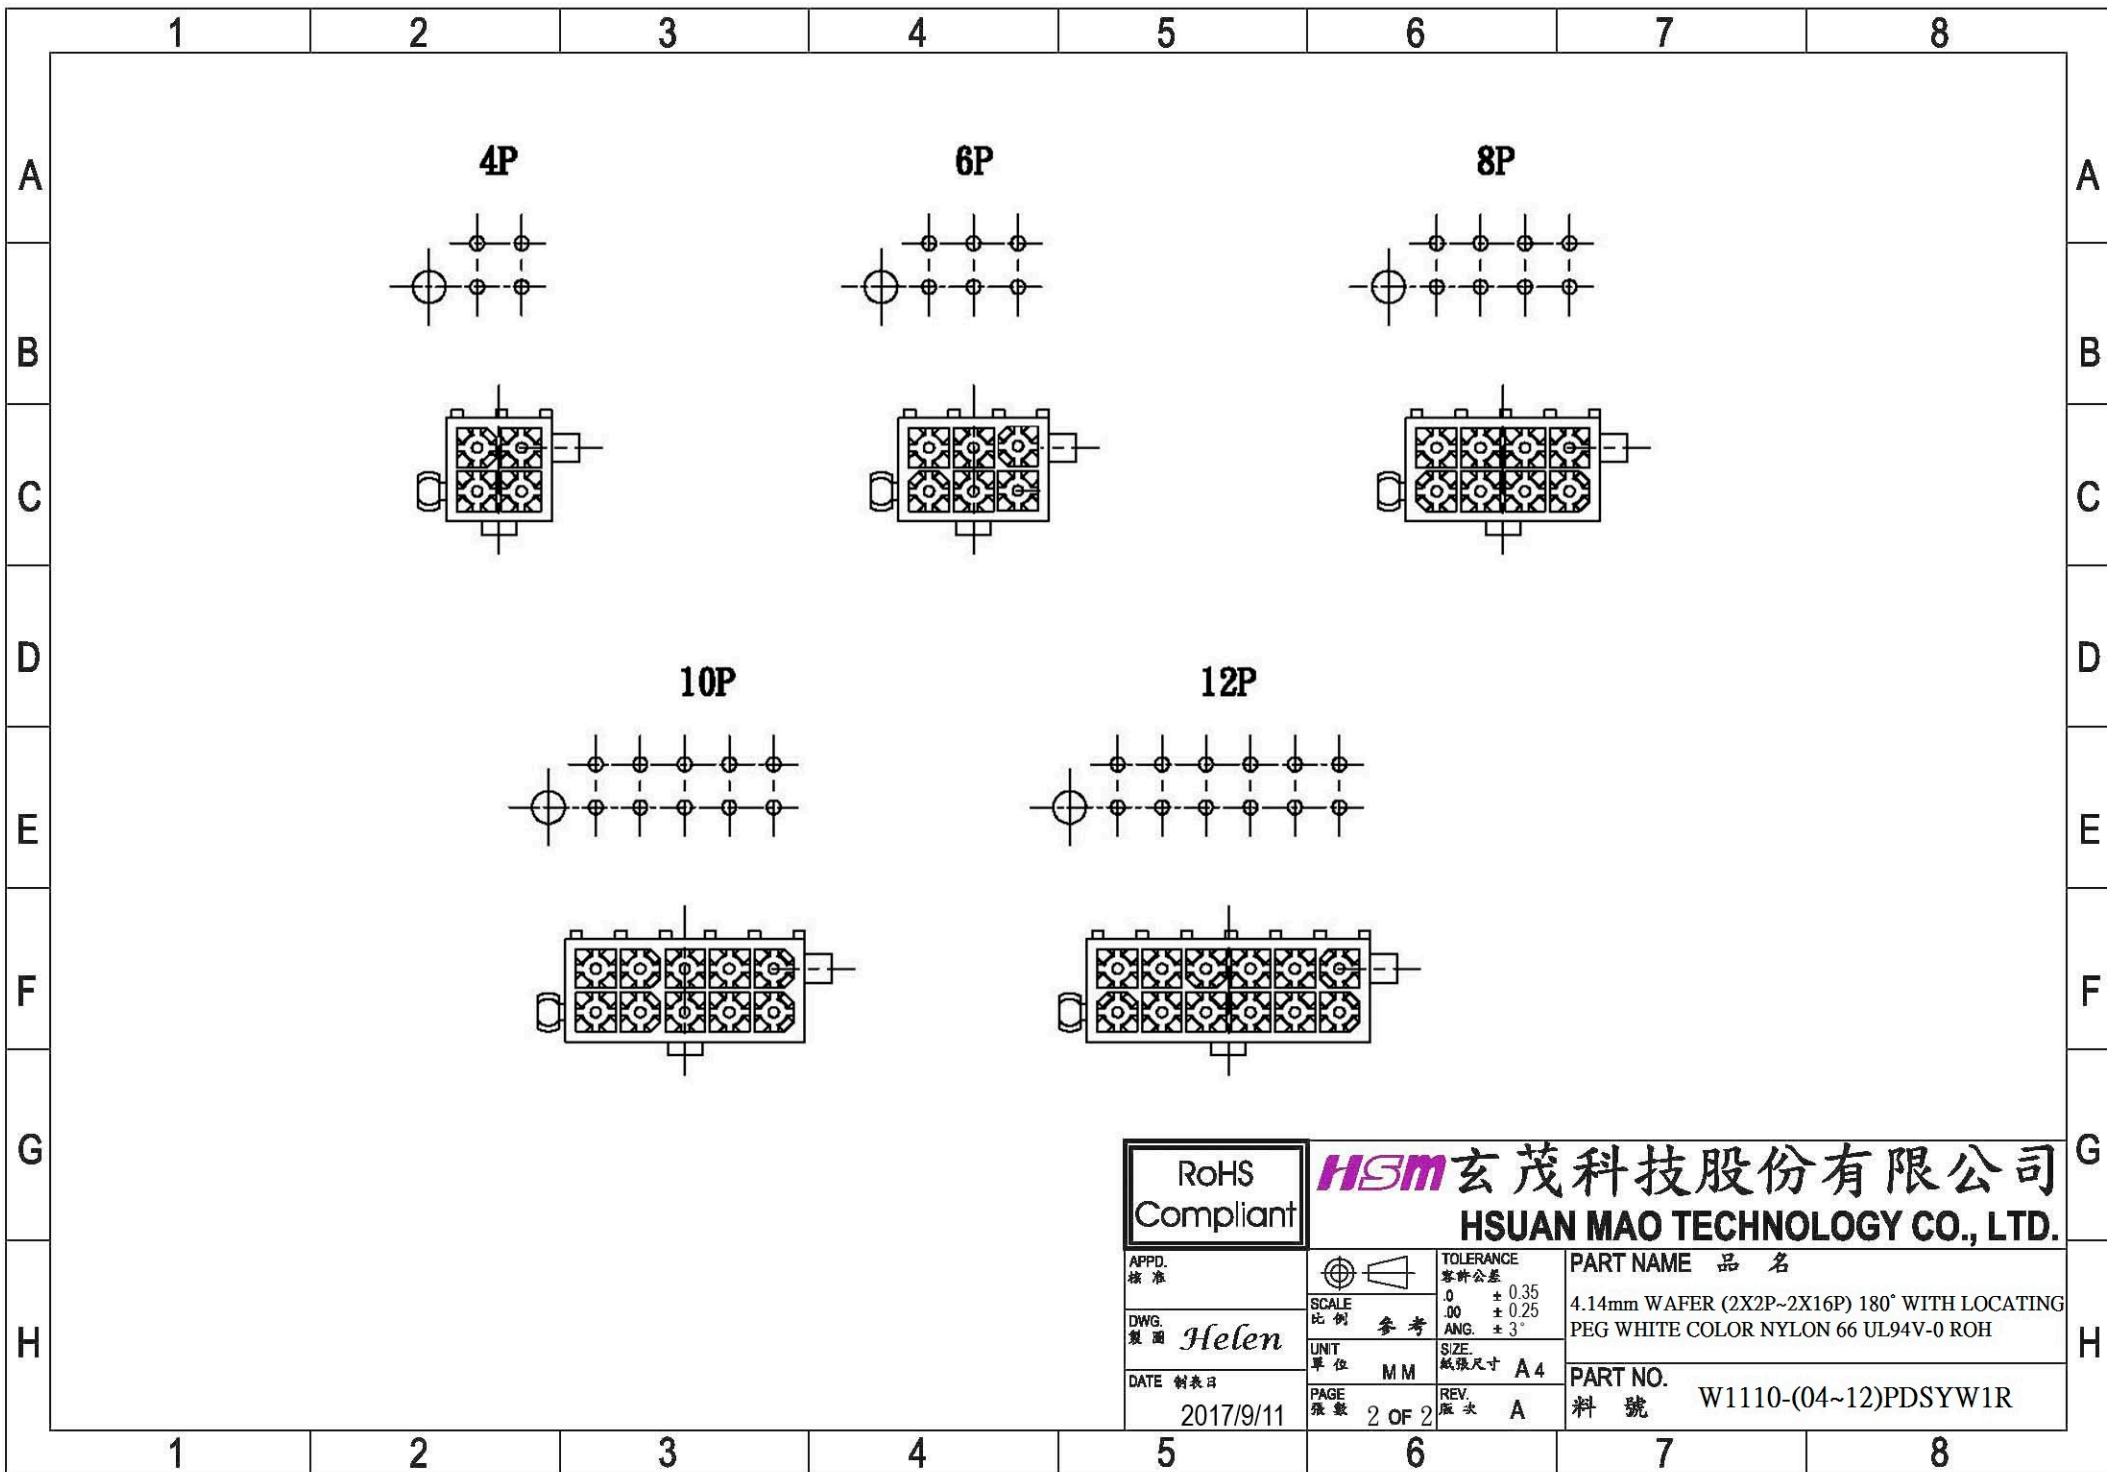

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准
DWG.
製圖
DATE
制表日

SCALE
比例
UNIT
單位
PAGE
張數

TOLERANCE
容許公差
SCALE
比例
UNIT
單位
PAGE
張數

PART NAME 品名
4.14mm WAFER (2X2P~2X16P) 180° WITH LOCATING
PEG WHITE COLOR NYLON 66 UL94V-0 ROH
PART NO.
料號

Helen
2017/9/11

參考
M M
2 OF 2

0 ± 0.35
.00 ± 0.25
ANG. ± 3°
SIZE
紙張尺寸 A 4
REV.
版本 A

W1110-(04~12)PDSYW1R