
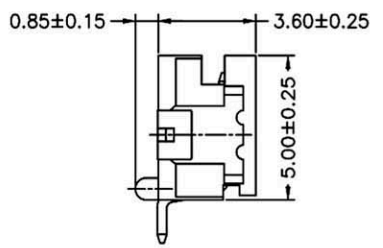
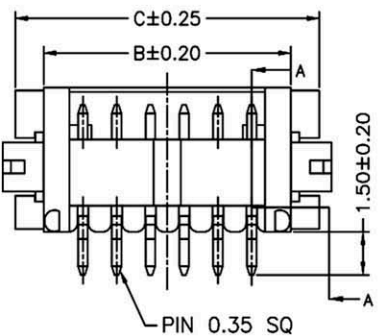


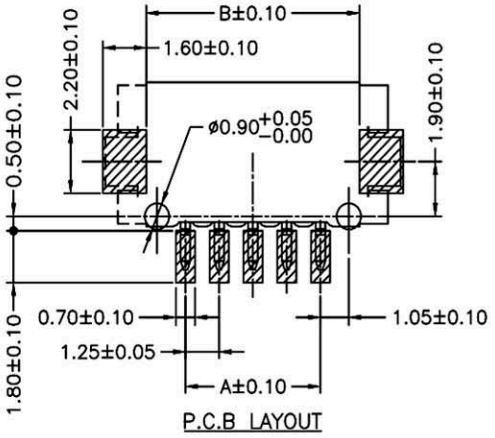




SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Gold-flash
 Solder Tabs: Phosphor Bronze/Gold-flash
 Material: Nylon 6T,UL94V-0

Circuit No.	Dimensions			
	A	B	C	D
02P	1.25	4.15	6.25	—
03P	2.50	5.40	7.50	—
04P	3.75	6.65	8.75	4.38
05P	5.00	7.90	10.00	5.63
06P	6.25	9.15	11.25	6.88
07P	7.50	10.40	12.50	8.13
08P	8.75	11.65	13.75	9.38
09P	10.00	12.90	15.00	10.63
10P	11.25	14.15	16.25	11.88
11P	12.50	15.40	17.50	13.13
12P	13.75	16.65	18.75	14.38
13P	15.00	17.90	20.00	15.63
14P	16.25	19.15	21.25	16.88
15P	17.50	20.40	22.50	18.13



RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty		TOLERANCE 容許公差 0 ± 0.25 .00 ± 0.15 .000 ± 0.05	PART NAME 品名 1.25mm WAFER 1XXXP SMT TYPE RIGHT ANGLE (SIDE ENTRY) GOLD FLASH IVORY COLOR ROHS
DWG. 製圖 Lena	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 W1355-XXPSBGI0R
DATE 制表日 2023/9/14	PAGE 張數 1 OF 2	REV. 版本 B	



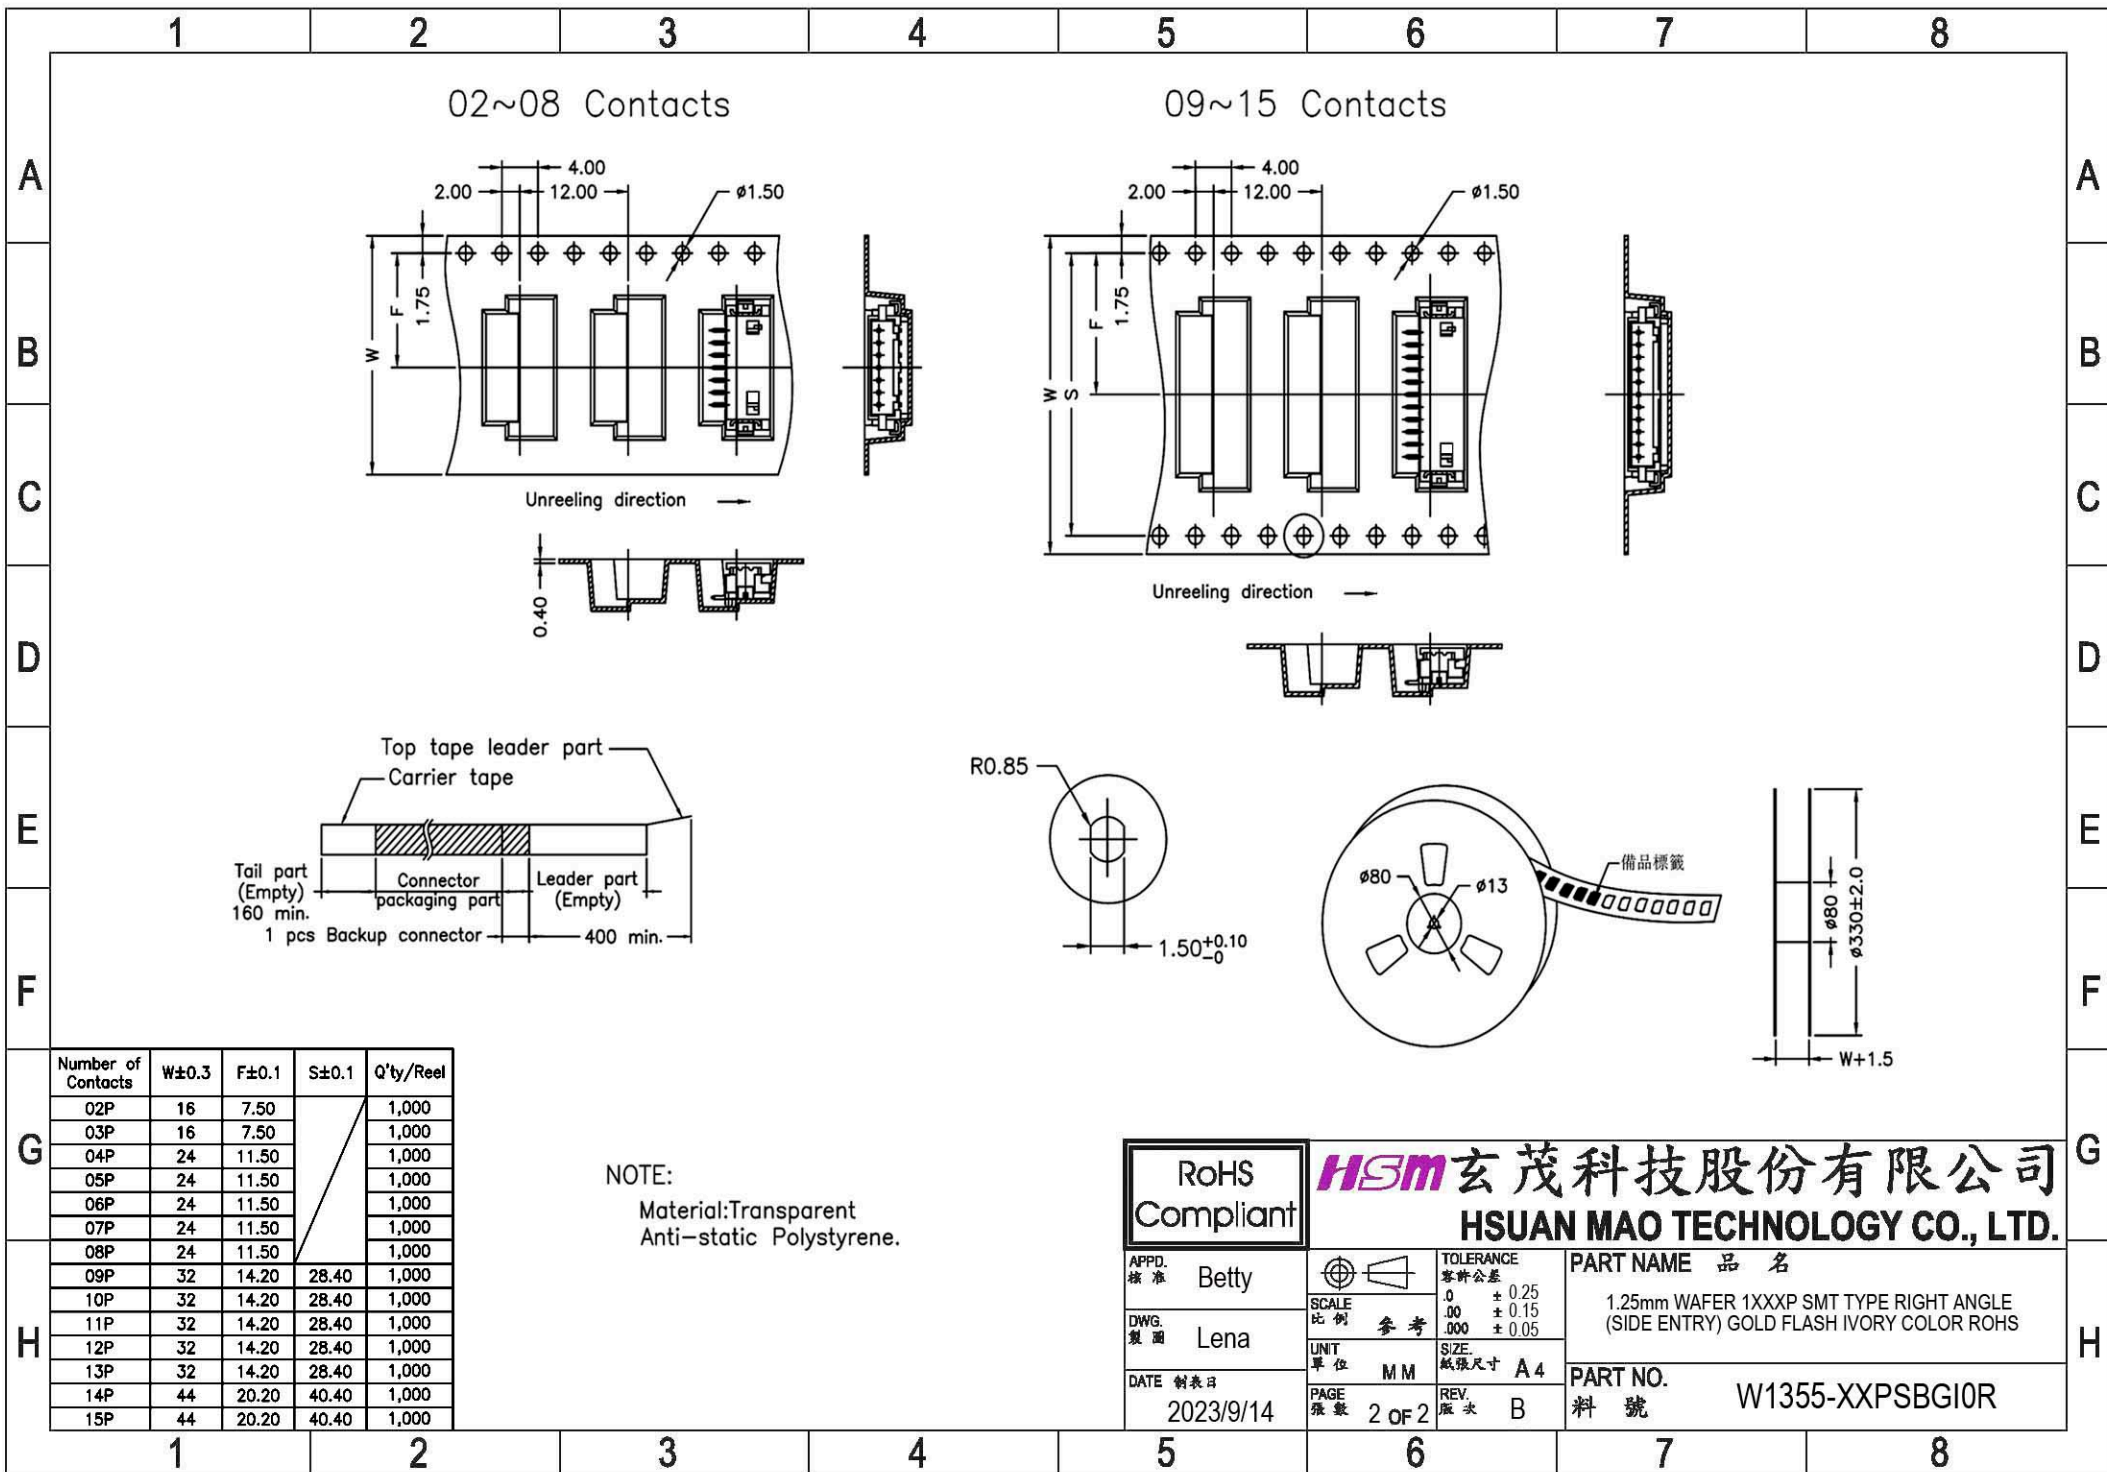

02~08 Contacts

09~15 Contacts

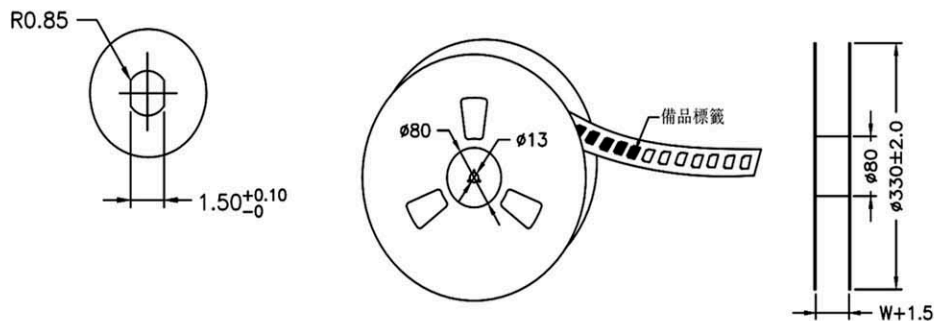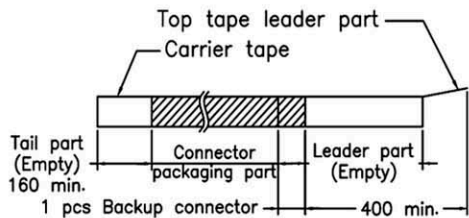

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
02P	16	7.50	/	1,000
03P	16	7.50		1,000
04P	24	11.50		1,000
05P	24	11.50		1,000
06P	24	11.50		1,000
07P	24	11.50		1,000
08P	24	11.50		1,000
09P	32	14.20		28.40
10P	32	14.20	28.40	1,000
11P	32	14.20	28.40	1,000
12P	32	14.20	28.40	1,000
13P	32	14.20	28.40	1,000
14P	44	20.20	40.40	1,000
15P	44	20.20	40.40	1,000

NOTE:
Material: Transparent
Anti-static Polystyrene.

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty		TOLERANCE 容許公差 0 ± 0.25 .00 ± 0.15 .000 ± 0.05	PART NAME 品名 1.25mm WAFER 1XXXP SMT TYPE RIGHT ANGLE (SIDE ENTRY) GOLD FLASH IVORY COLOR ROHS
DWG. 製圖 Lena	SCALE 比例 參考	UNIT 單位 MM	SIZE 紙張尺寸 A 4
DATE 制表日 2023/9/14	PAGE 張數 2 OF 2	REV. 版本 B	PART NO. 料號 W1355-XXPSBGI0R