



RECOMMENDED P.C.BOARD HOLE DIMM.

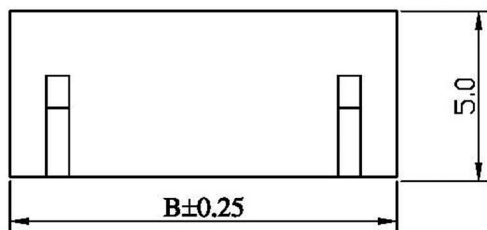

### SPECIFICATIONS

Current rating : 1A AC,DC  
 Voltage rating : 100V AC,DC  
 Temperature range : -25°C to +85 °C  
 Contact resistance : 20m Ω Max.  
 Insulation resistance : 500M Ω Min.  
 Withstanding voltage : 500V AC/minute  
 Material : Pin-Brass/Tin-plated  
 Base-Nylon 9T UL94V-0

### Ordering Information & Dimensions

Poles	Dimension (mm)		
	A	B	C
2	1.50	6.00	3.60
3	3.00	7.50	5.10
4	4.50	9.00	6.60
5	6.00	10.50	8.10
6	7.50	12.00	9.60
7	9.00	13.50	11.10
8	10.50	15.00	12.60
9	12.00	16.50	14.10
10	13.50	18.00	15.60
11	15.00	19.50	17.10
12	16.50	21.00	18.60
13	18.00	22.50	20.10

RoHS Compliant	<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Hedy	 TOLERANCE 容許公差 $XX \pm 0.2$ $XX \pm 0.3$ ANG. ±	PART NAME 品名 1.50mm WAFER SMT STRAIGHT 1XXXP IVORY COLOR ROHS LOW-LEAD
DWG. 製圖 Yumi		SCALE 比例 參考 UNIT 單位 M M PAGE 張數 1 OF 1
DATE 制表日 2011/04/28		