

您正在使用
ZwCAD 2007 試用版
詳情請查閱WWW.ZwCAD.COM






Specifications

Current Rating: 1A AC, DC
Voltage Rating: 600V AC, DC
Temperature Range: -25°C ~+85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1800V AC/ minute
Terminal Material: Brass/Tin-plated
Material: Nylon 6T, UL94V-0

P.C.B LAYOUT

PART NO.	DIMENSION (mm)				Note.
	A	B	C	D	
W2108-03PBTX1R	4.00	10.00	9.2	6.45	
W2108-05PBTX2R	8.00	14.00	13.2	10.45	
W2108-07PBTX3R	12.00	18.00	17.2	14.45	

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY		TOLERANCE 容許公差 .0 ±0.3 .00 ±0.2 ANG. ±	PART NAME 品名 JST BH4.0 SMT RIGHT ANGLE TYPE XXP ROHS
DWG. 製圖 BETTY	SCALE 比例 參考	UNIT 單位 M M	PART NO. 料號 W2108-XXPBTX1XR
DATE 制表日 2008/07/14	PAGE 張數 1 OF 2	REV. 版次 A	

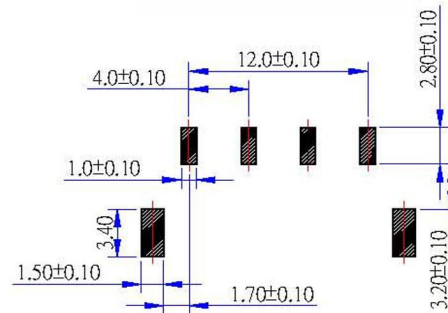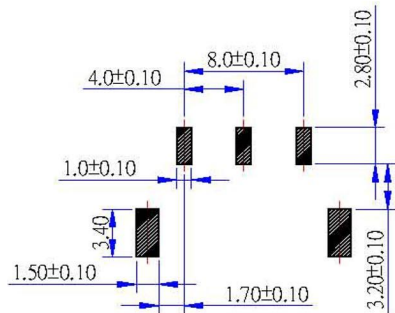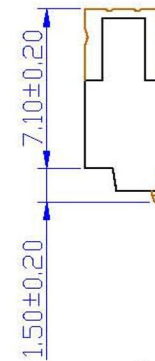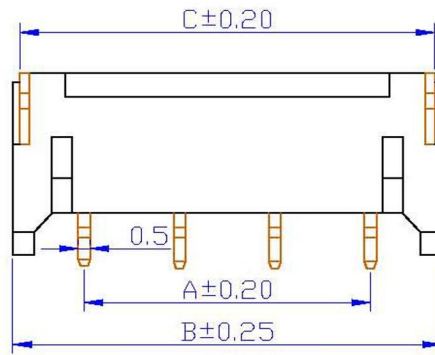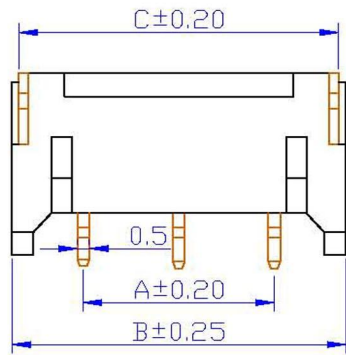

P.C.B. LAYOUT

Specifications

Current Rating: 1A AC, DC
 Voltage Rating: 600V AC, DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20MΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1800V AC/ minute
 Terminal Material: Brass/Tin-plated
 Material: Nylon 6T, UL94V-0

PART NO.	DIMENSION (mm)				Note.
	A	B	C	D	
W2108-05PBTX11R	8.00	14.00	13.20	10.45	
W2108-07PBTX11R	12.00	18.00	17.20	14.45	

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.3 .00 ± 0.2 ANG. ±	PART NAME 品名 JST BH4.0 SMT RIGHT ANGLE TYPE XXP ROHS
DWG. 製圖 BETTY		UNIT 單位 MM	SIZE. 紙張尺寸 A 4
DATE 制表日 2008/07/14	PAGE 張數 2 OF 2	REV. 版本 A	PART NO. 料號 W2108-XXPBTX1XR