



- * Poles:2-16
- * Material:Insulator: NYLON66 UL94V-0
Color: White
- * Contact:0.64mm(.025") square pin,brass,tin plated

Specifications



- * Current rating: 3A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 1,000 AC/minute
- * Applicable PC board thickness: .063" (1.6mm)

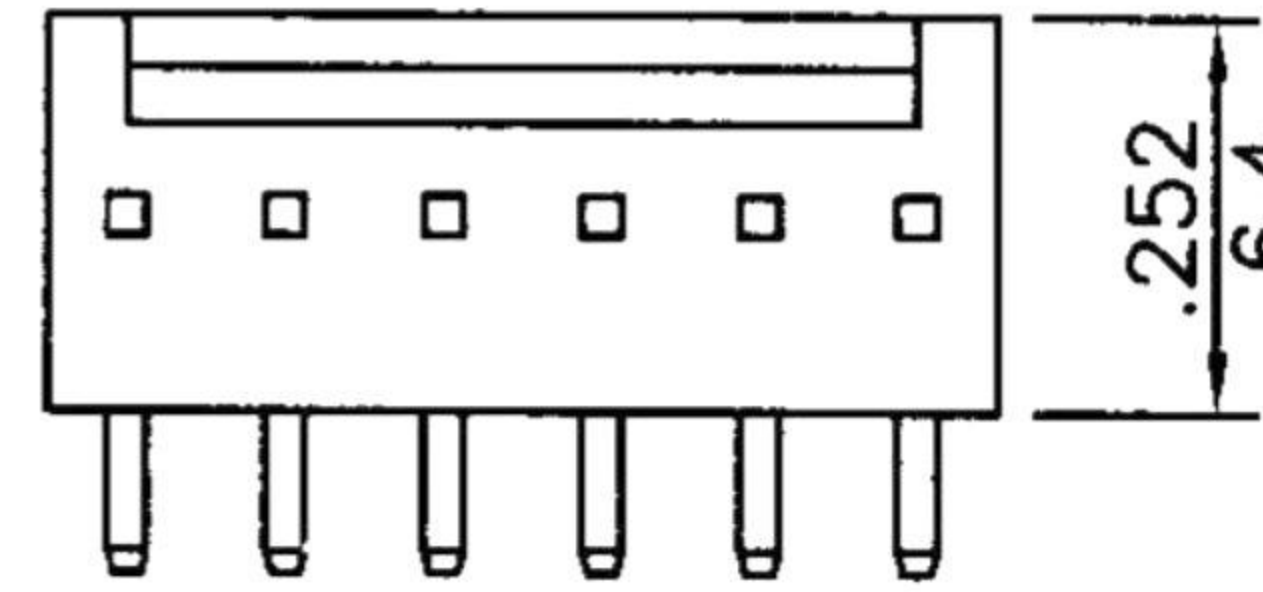

inches
mm

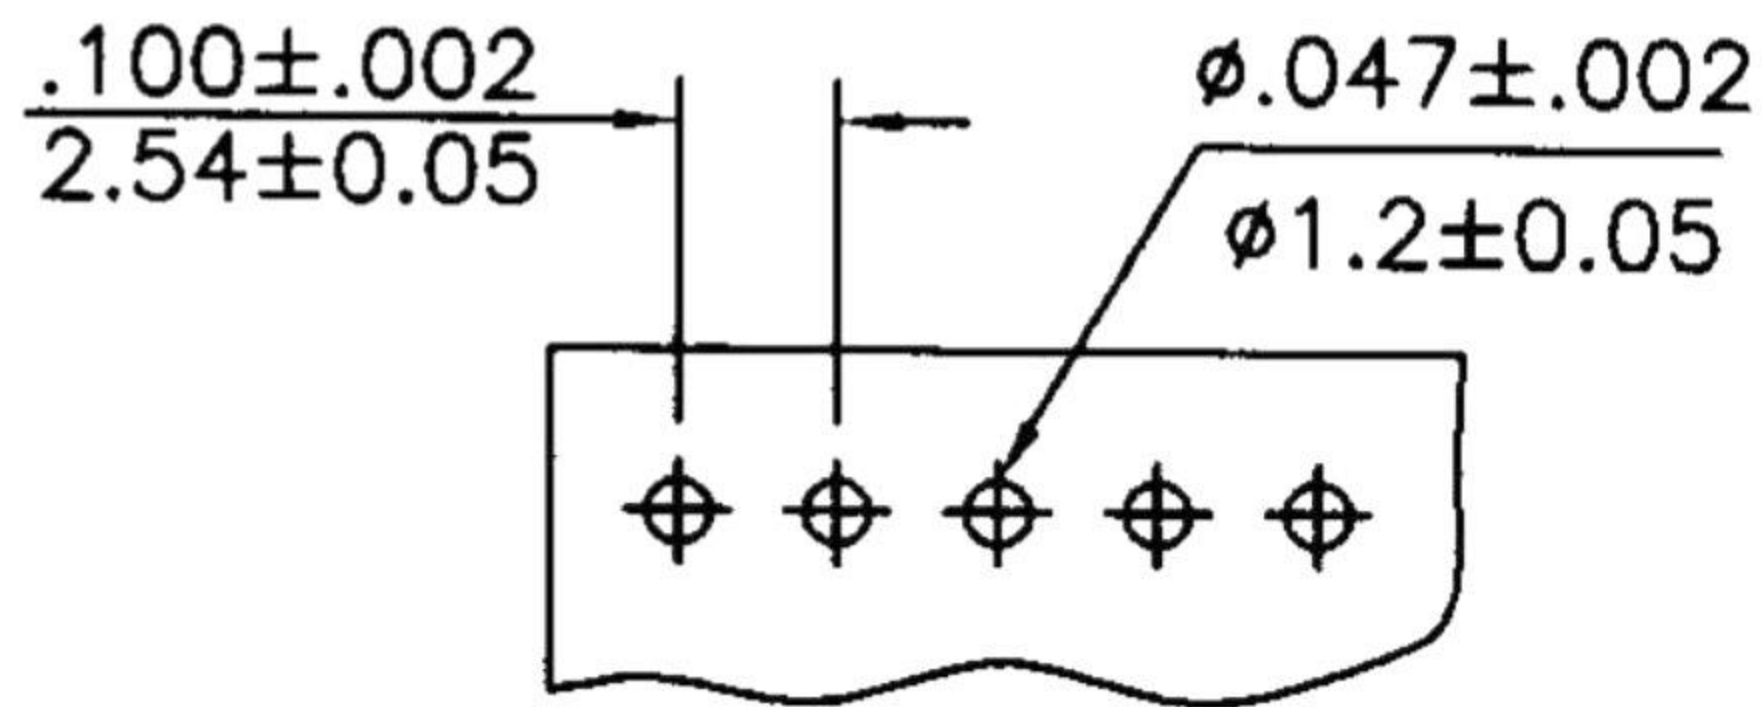

P.C. Board Layout

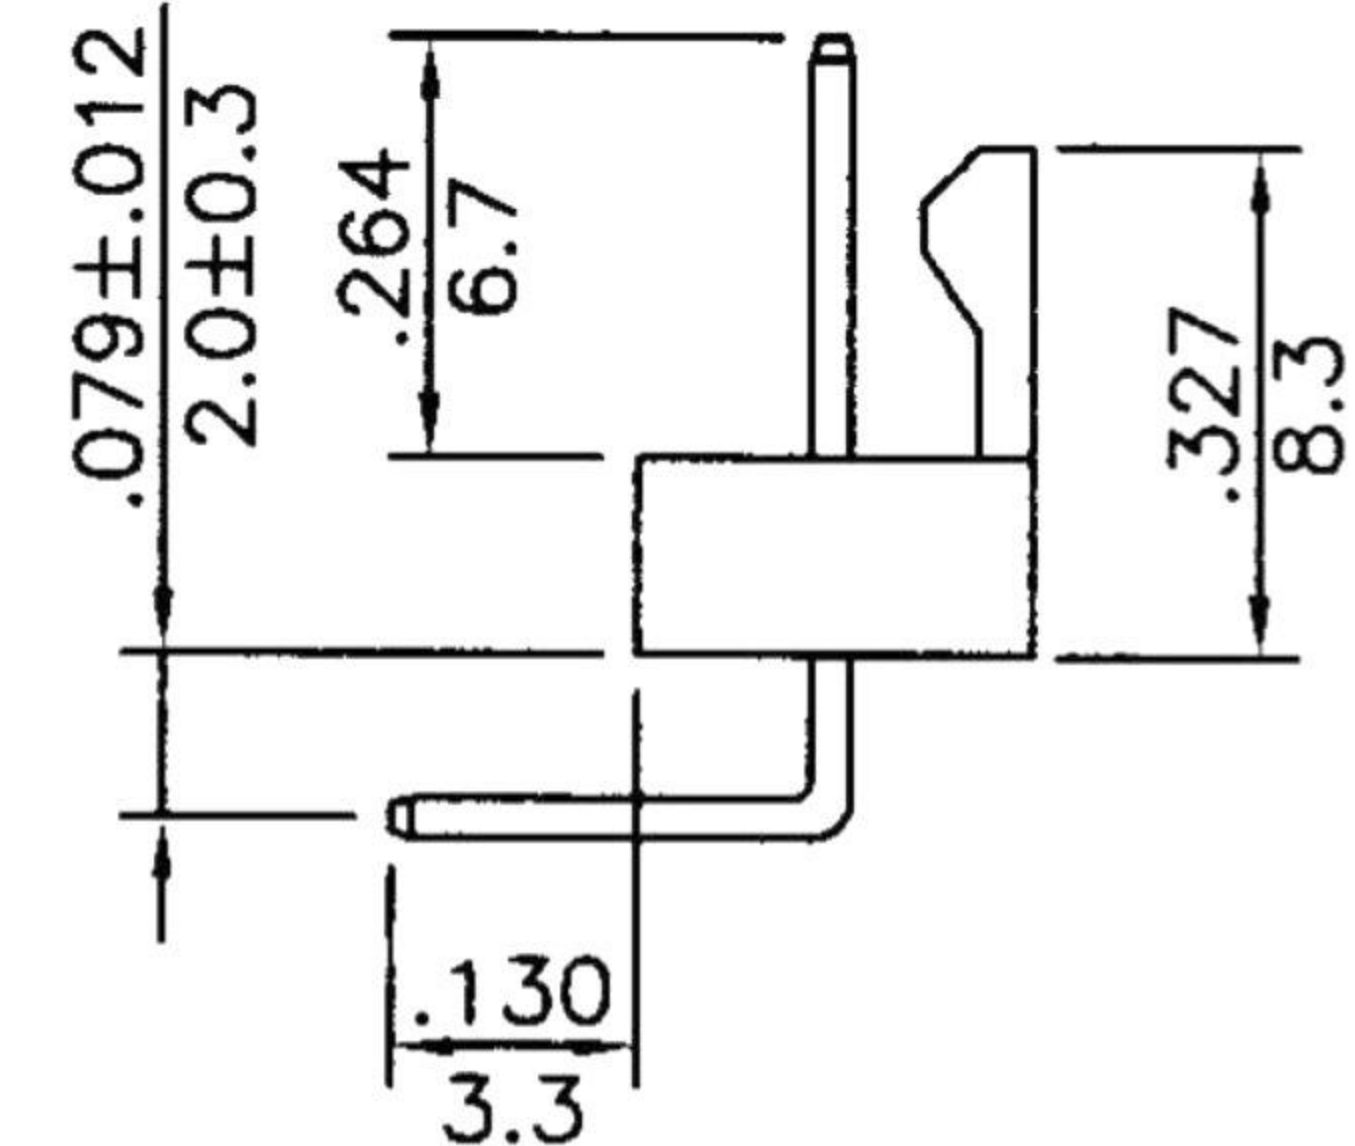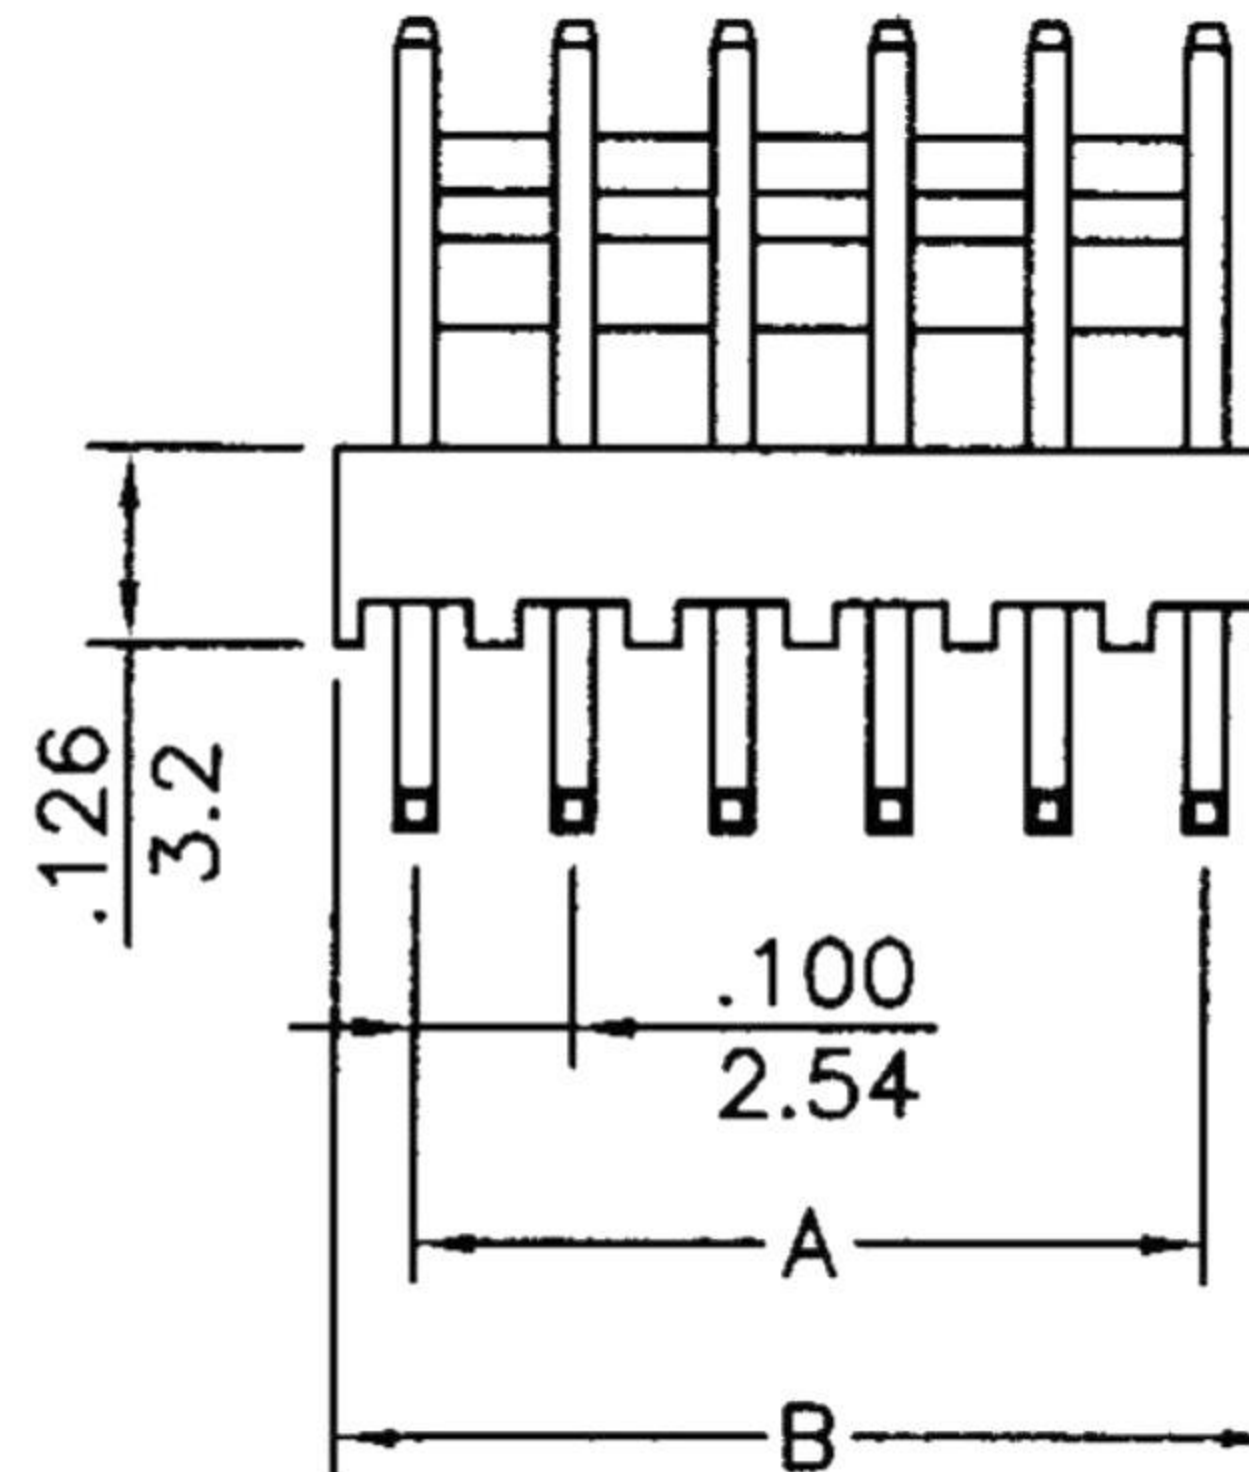

CIRCUITS	DIMENSION in.(mm)		CIRCUITS	DIMENSION in.(mm)	
	A	B		A	B
2	0.100(2.54)	0.201(5.10)	10	0.900(22.86)	1.006(25.54)
3	0.200(5.08)	0.302(7.68)	11	1.000(25.40)	1.106(28.10)
4	0.300(7.62)	0.403(10.24)	12	1.100(27.94)	1.206(30.64)
5	0.400(10.16)	0.503(12.78)	13	1.200(30.48)	1.307(33.20)
6	0.500(12.70)	0.600(15.24)	14	1.300(33.02)	1.407(35.74)
7	0.600(15.24)	0.704(17.88)	15	1.400(35.56)	1.508(38.30)
8	0.700(17.78)	0.805(20.44)	16	1.500(38.10)	1.608(40.84)
9	0.800(20.32)	0.906(23.00)			

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 ABBY
DWG. 製圖 HELEN
DATE 制表日 2013/12/25

SCALE 比例 參考
UNIT 單位 MM
PAGE 張數 1 OF 1
TOLERANCE 容許公差
0 ± 0.3
.00 ± 0.25
ANG ± 3°
SIZE. 紙張尺寸 A 4
REV. 版次 A

PART NAME 品名
2.54mm WAFER XXP RIGHT ANGLE
NYLON66 UL94V-0 TIN PLATED
WHITE COLOR SHORT BACK ROHS
PART NO. 料號 W2515-XXPRTW10R