


NOTE:

1. MATERIAL:
 INSULATOR: PA66 UL94-V0 BLACK
 PWR & GND PIN: High Conductivity Copper
 SENSE PIN: Phosphor Bronze

2. FINISH:
 CONTACT: 80u" Min TIN-PLATED OVERALL, 30u" Min NICKEL UNDER PLATED.

3. ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 9.2A PER PIN(PWR & GND PIN)
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 VAC 1 MINUTE
 INSULATION RESISTANCE: 1000MΩ MIN. AT 500V/DC
 CONTACT RESISTANCE: 10mΩ MAX
 TEMPERATURE RANGE: -25° C~+85° C

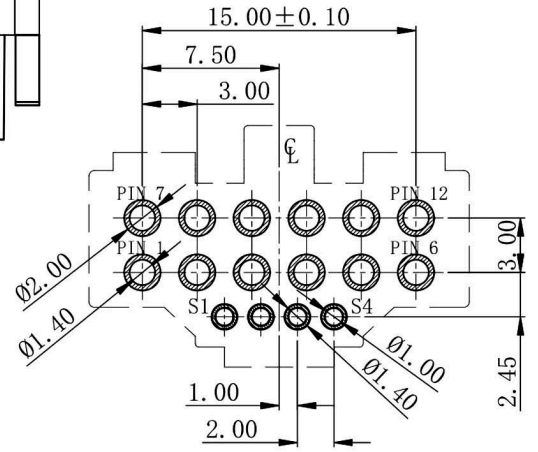

PIN SIGNAL	PIN NO.
PWR PIN	1~6
GND PIN	7~12
S1	CARD_PWR_STAB
S2	CARD_CBL_PRES
S3	SENSE0
S4	DO NOT USF

RECOMMEND P. C. B LAYOUT
 TOLERANCE: ±0.05(TOP VIEW)

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APFD. 核准	SCALE 比例 参考	TOLERANCE 0 ± 0.30 .0 ± 0.25 .00 ± 0.20 .000 ± 0.05 ANGLE. ± 1°	PART NAME 品名 3.0MM PCI-E MALE WAFER 12+4PIN 180° TIN PLATING DIP LENGTH:2.7MM MATERIAL:PA66 UL94V-0 BLACK COLOR TRAY PACKING ROHS
DWG. 製圖 Betty	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. W4233-16PSTA0BHR
DATE 制表日 2024/03/19	PAGE 張數 1 OF 1	REV. 版次 A	料號