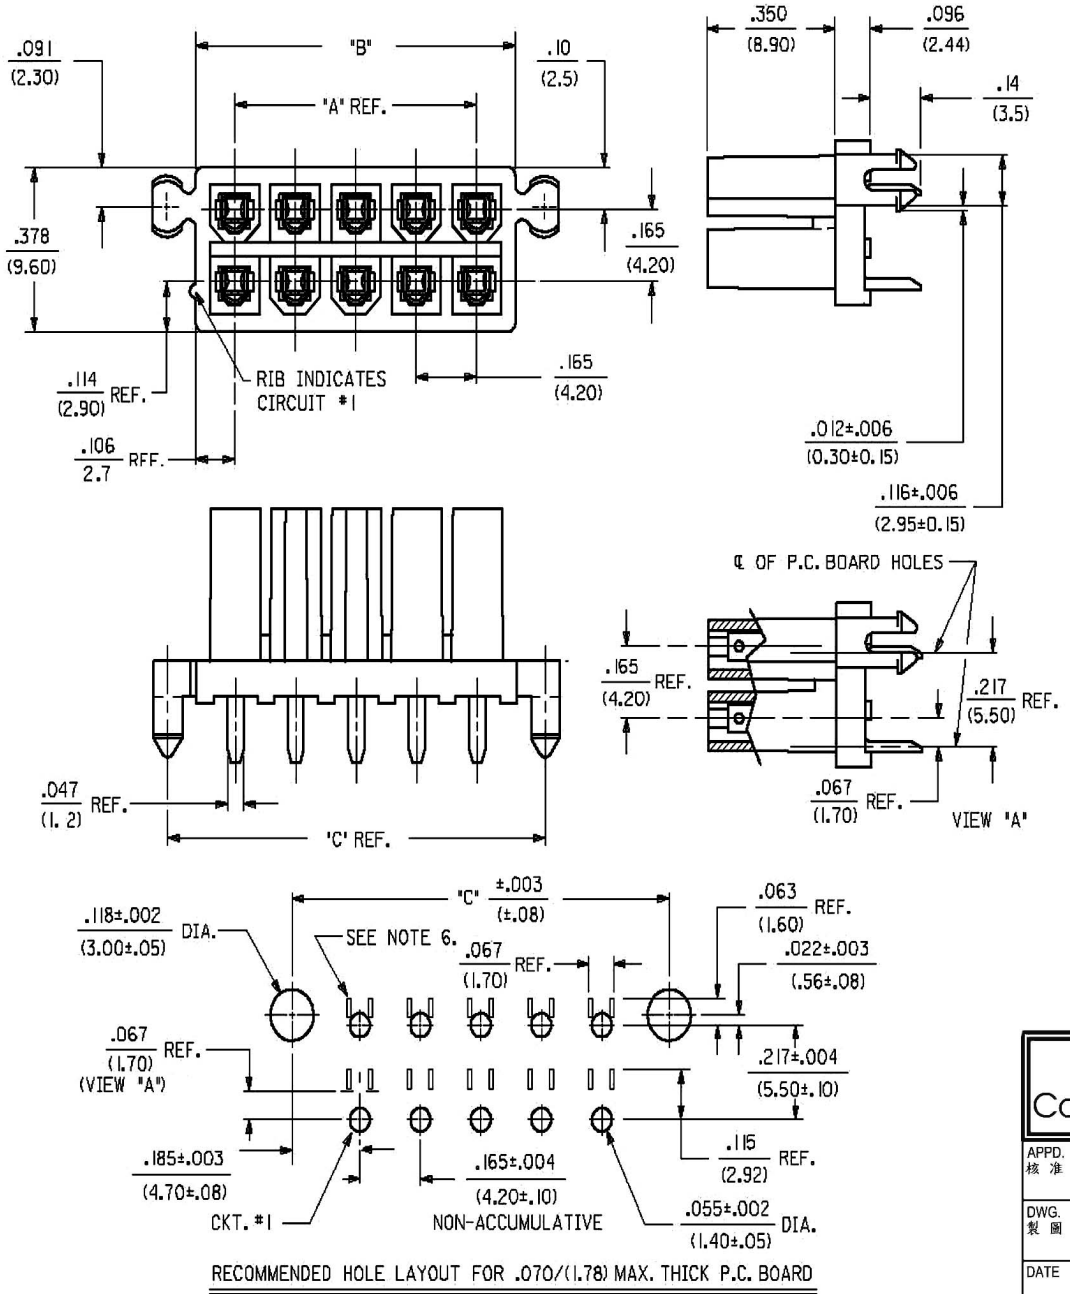

RECOMMENDED HOLE LAYOUT FOR .070/(1.78) MAX. THICK P.C. BOARD

Features:

- 2 ~ 24 circuits available
- Tin-plated brass
- V0

Specification:

- Current rating:

Circuits			
2	4, 6	8, 10	12~24
9 A	8 A	7 A	6 A

- Voltage rating: 600V (R.M.S.)
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C
N	4.2 x (N/2-1)	A+5.4	A+9.4

&& N = 2 ~ 24

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准		UNLESS OTHERWISE SPECIFIED TOLERANCE .000 ± 0.08 (mm) .00 ± 0.25 (mm) .0 ± 0.40 (mm)	PART NAME 品名: MINI FIT BMI(TM) 4.2mm MALE WAFER 2XXXP STRAIGHT TYPE W/ LOCATING PEG WHITE COLOR NYLON 66 UL94-V0 ROHS
DWG. 製圖	Betty	SCALE 比例 參考	
DATE 制表日	2017/09/22	UNIT 單位 MM	SIZE. 紙張尺寸 A4
		PAGE 張數 1 OF 1	REV. 版次 A
			PART NO. 料號 W5152-XXPDSTW1R