
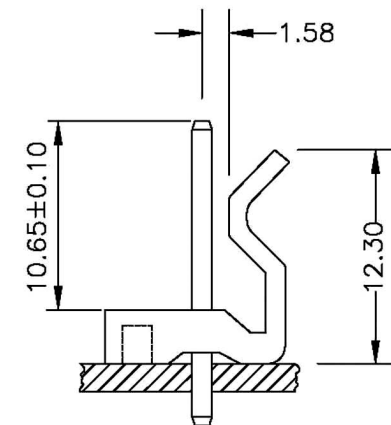
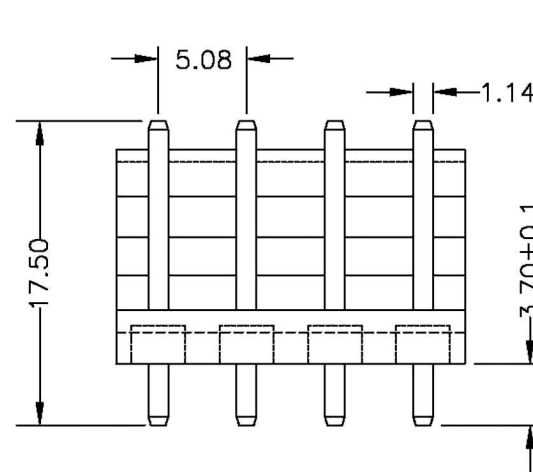


FEATURES:

- . 02-20 Circuits
- . .045" [1.14mm] Squire wire pins
- . Nylon, [UL 94V-2]
- . Straight pins

SPECIFICATIONS:

- . Current rating: 7A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperatur range: -40°C ~+ 105°C
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing /20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltange: 1500V AC/minute
- . Applicable PC board thickness: .063"[1.6mm]

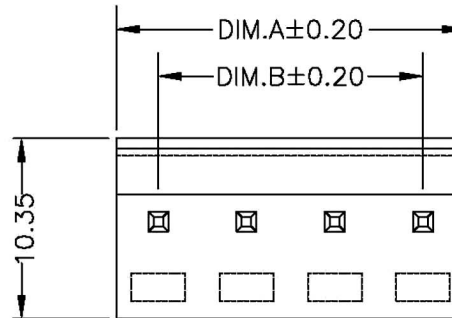

PIN數	DIM.A	DIM.B	PIN數	DIM.A	DIM.B
02	9.91	5.08	12	60.71	55.88
03	14.99	10.16	13	65.79	60.96
04	20.07	15.24	14	70.87	66.04
05	25.15	20.32	15	75.95	71.12
06	30.23	25.40	16	81.03	76.20
07	35.31	30.48	17	86.11	81.28
08	40.39	35.56	18	91.19	86.36
09	45.47	40.64	19	96.27	91.44
10	50.55	45.72	20	101.35	96.52
11	55.63	50.80			

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 Hedy
DWG. 製圖 Yumi
DATE 制表日 2008/08/28

SCALE 比例 參考
UNIT 單位 M M
PAGE 張數 1 OF 1

TOLERANCE 容許公差
.0 ±
.00 ±
ANG. ±
SIZE. 紙張尺寸 A 4
REV. 版次 A
PART NAME 品名
5.08mm WAFER STRAIGHT TYPE 1XXXPIN
WITHLOCKING RIB TIN PLATING
WHITE COLOR (UL94V-2 MATERIAL) ROHS
PART NO.
料號 W5190-XXPSYATWR