

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	6.35	13.97	7	38.10	45.72
3	12.70	20.32	8	44.45	52.07
4	19.05	26.67	9	50.80	58.42
5	25.40	33.02	10	57.15	64.77
6	31.75	39.37			

Features:




- 2 ~ 10 circuits available
- Pin Material: Tin-plated phosphor bronze

Specification:

- Current rating: 13A (2~4P), 11A (6~10P)
- Voltage rating: 600V
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature rise: -55°C ~ 105°C

Ordering Information

Part No. Circuits	Feature	Y:With Polarizing N:Without Polarizing	Material
2		W6350-02PSSXW0R	UL 94V-2
3		W6350-03PSSXW0R	
4		W6350-04PSSXW0R	
5		W6350-05PSSXW0R	
6		W6350-06PSSXW0R	
7		W6350-07PSSXW0R	
8		W6350-08PSSXW0R	
9		W6350-09PSSXW0R	
10		W6350-10PSSXW0R	
2		W6350-02PSSXW0R	
3		W6350-03PSSXW0R	
4		W6350-04PSSXW0R	
5		W6350-05PSSXW0R	
6		W6350-06PSSXW0R	
7		W6350-07PSSXW0R	
8		W6350-08PSSXW0R	
9		W6350-09PSSXW0R	
10		W6350-10PSSXW0R	

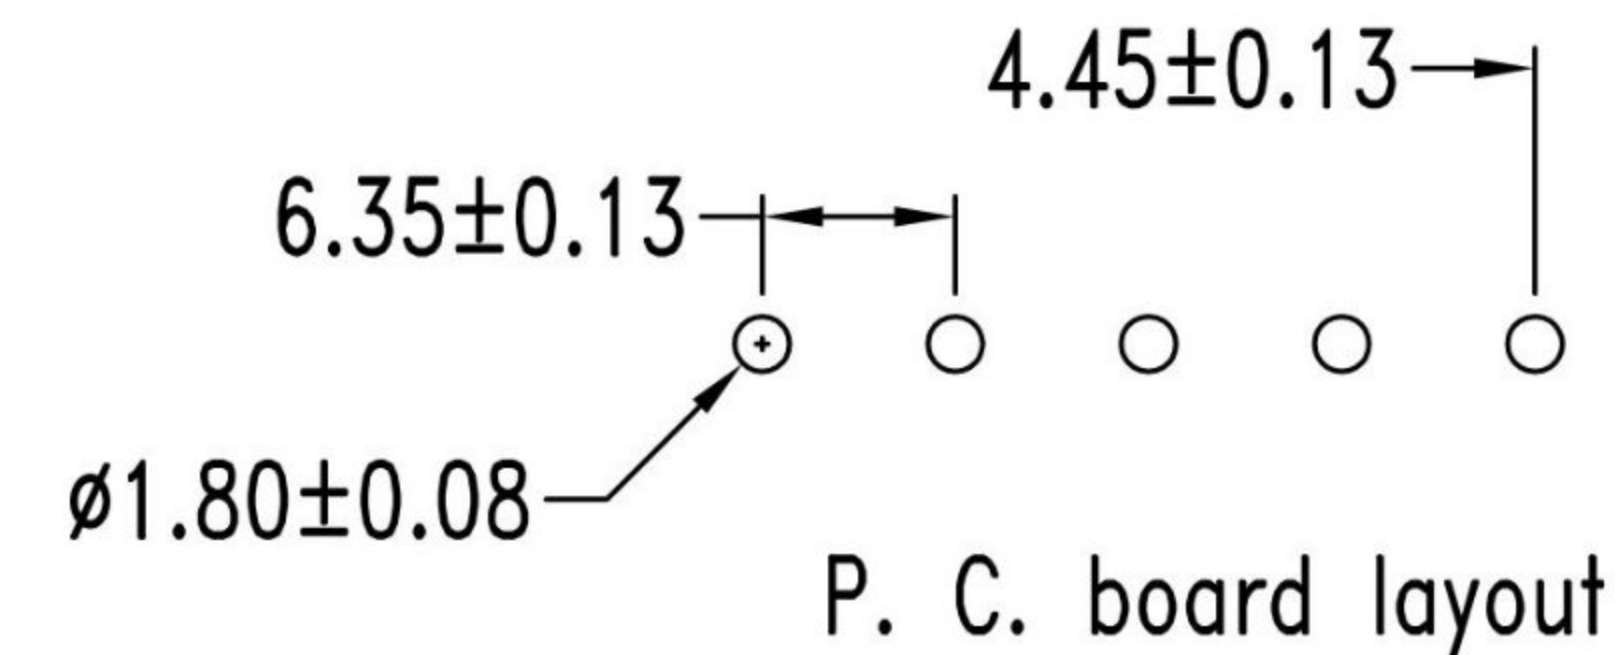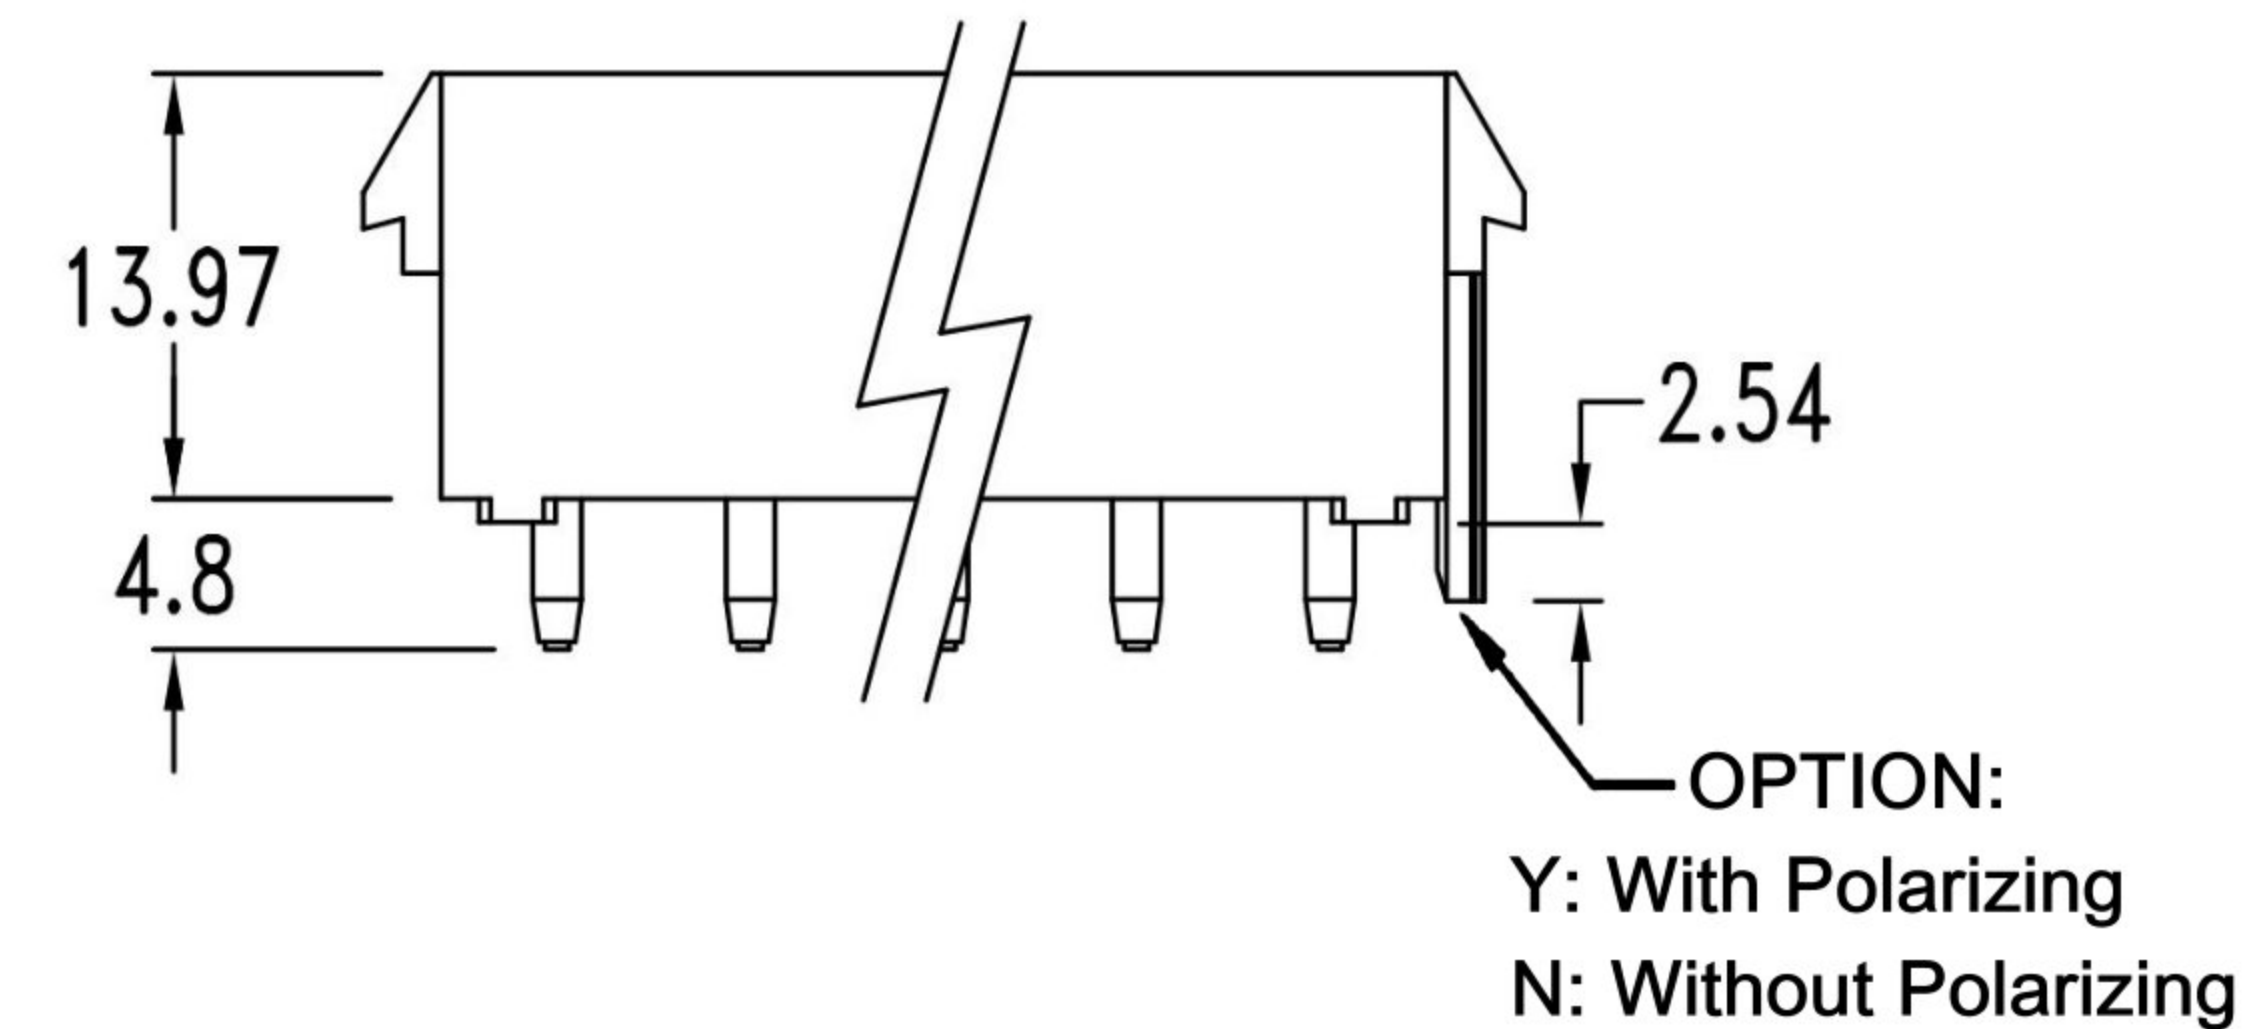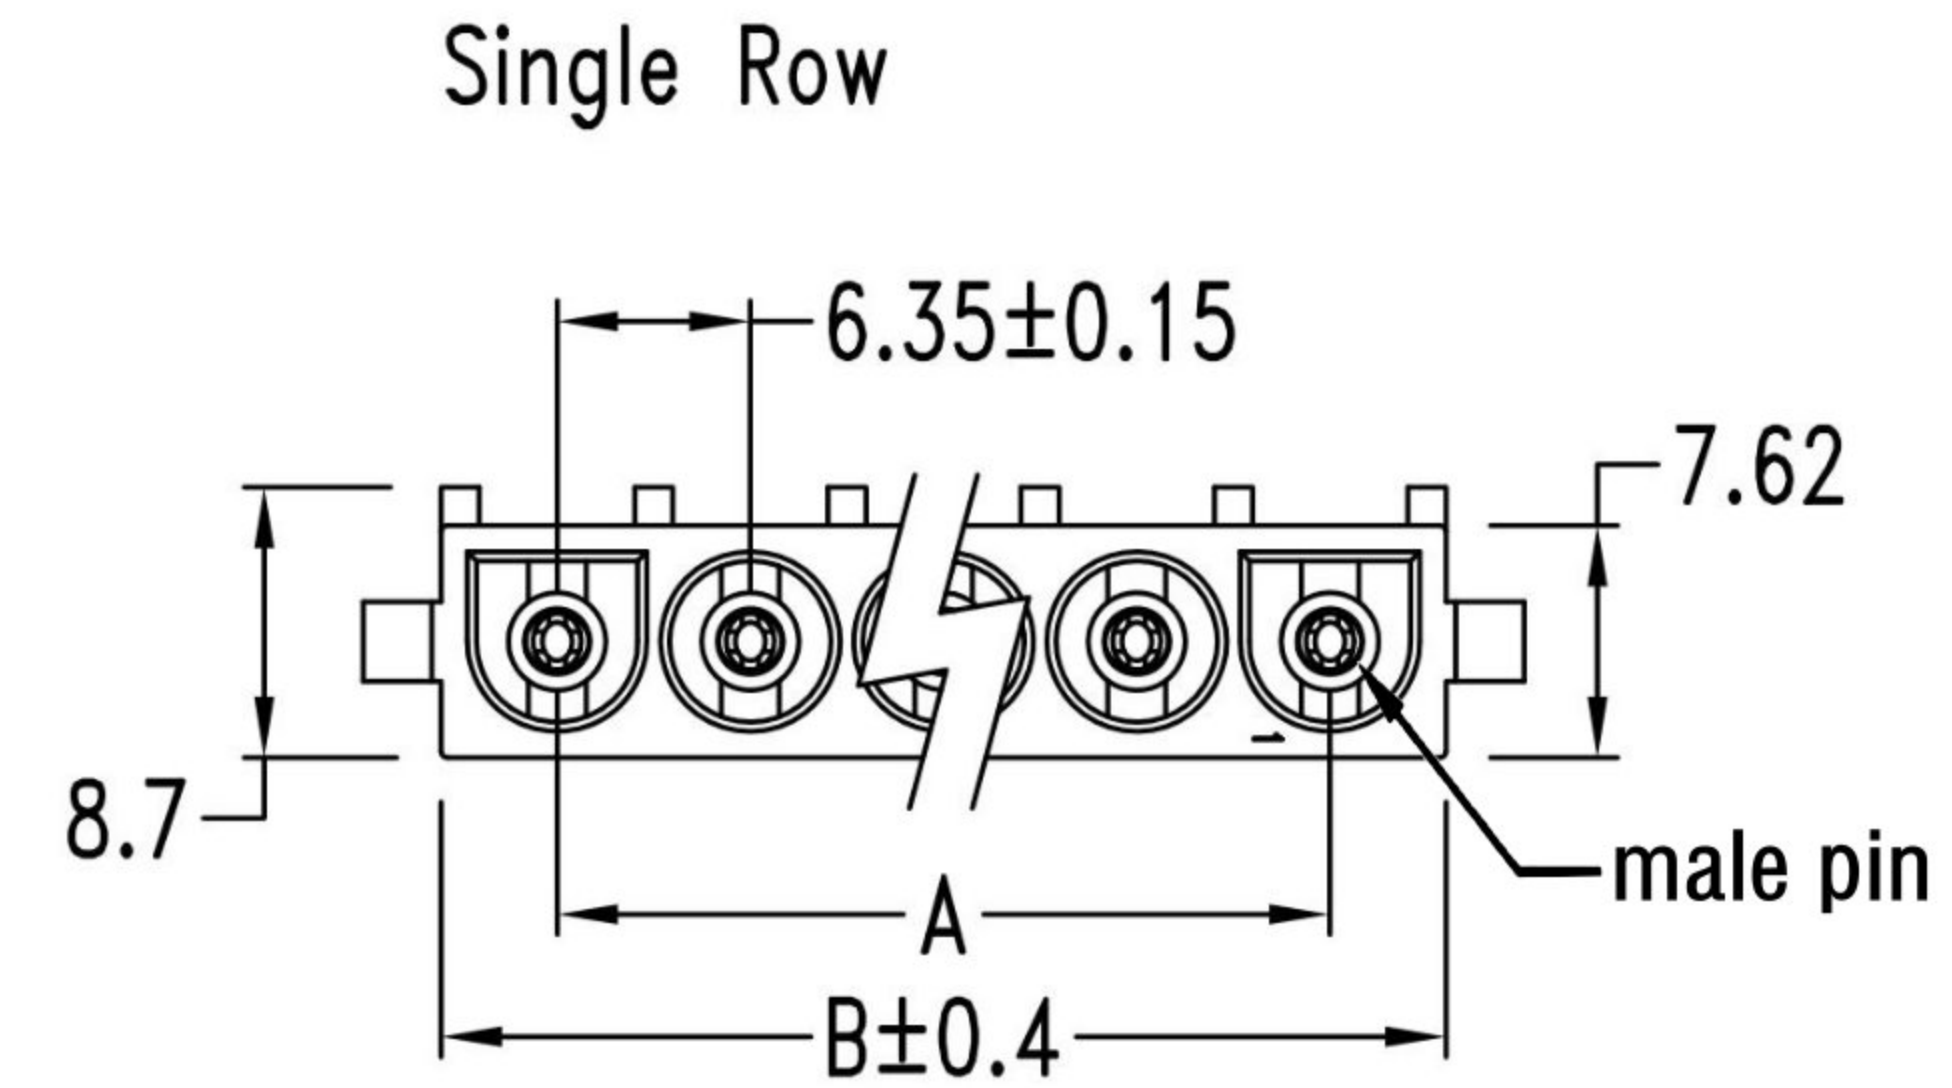

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN		TOLERANCE 容許公差 .000 ± 0.05 .00 ± 0.15 .0 ± 0.25	PART NAME 品名 6.35mm WAFER STRAIGHT(MALE) 1XXXP WITH OR WITHOUT POLARIZING FEATURE MATERIAL:V-2 WHITE ROHS
DWG. 製圖 ABBY	SCALE 比例 參考	UNIT 單位 MM	SIZE. 紙張尺寸 A 4
DATE 制表日 2020/07/30	PAGE 張數 1 OF 1	REV. 版次 B	PART NO. 料號 W6350-XXPSSXWXR