


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

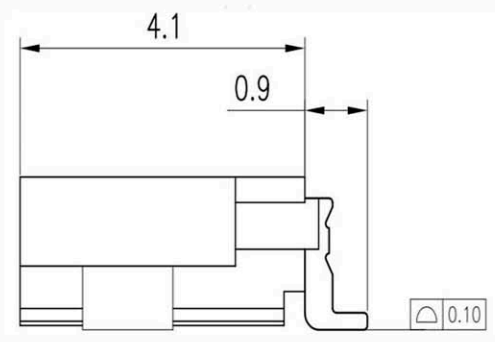



NOTES:

1. MATERIAL:
 1.1 Housing: Halogen Free Plastic, High Temp, UL94V-0.
 1.2 Contact: Copper Alloy, Gold Plash Plating.
 1.3 Fitting Nail: Copper Alloy.
 2. Reflow Solder Capable TO 260°C.

ELECTRICAL:

1. Voltage: 50 Vols AC (Per Pin).
 2. Current: 0.5 Amperes (Per Pin).
 3. Operating Temperature: -30°C To +85°C.
 4. Contact Resistance:
 20mΩ Max. (initial) per Contact.
 40mΩ Max. After Tests.
 5. Insulation Resistance: 100MΩ Min.
 6. Dielectric Withstanding Voltage: 250V AC Min. at sea level for 1 minute. No discharge, flashover or breakdown.
 7. Temperature Rise: 30°C Max.

CKTS	DIM A	DIM B	DIM C
2	1.00	4.80	2.40
3	2.00	5.80	3.40
4	3.00	6.80	4.40
5	4.00	7.80	5.40
6	5.00	8.80	6.40
7	6.00	9.80	7.40
8	7.00	10.80	8.40
9	8.00	11.80	9.40
10	9.00	12.80	10.40
11	10.00	13.80	11.40
12	11.00	14.80	12.40
13	12.00	15.80	13.40
14	13.00	16.80	14.40
15	14.00	17.80	15.40
16	15.00	18.80	16.40
17	16.00	19.80	17.40
18	17.00	20.80	18.40
19	18.00	21.80	19.40
20	19.00	22.80	20.40
21	20.00	23.80	21.40
22	21.00	24.80	22.40
23	22.00	25.80	23.40
24	23.00	26.80	24.40
25	24.00	27.80	25.40
26	25.00	28.80	26.40
27	26.00	29.80	27.40
28	27.00	30.80	28.40
29	28.00	31.80	29.40
30	29.00	32.80	30.40

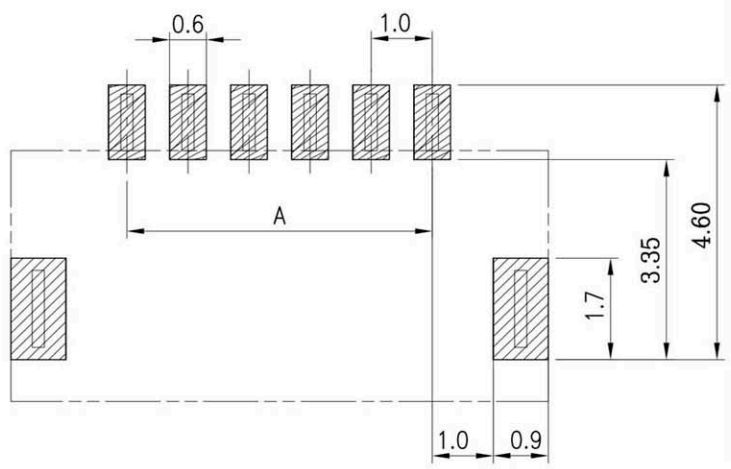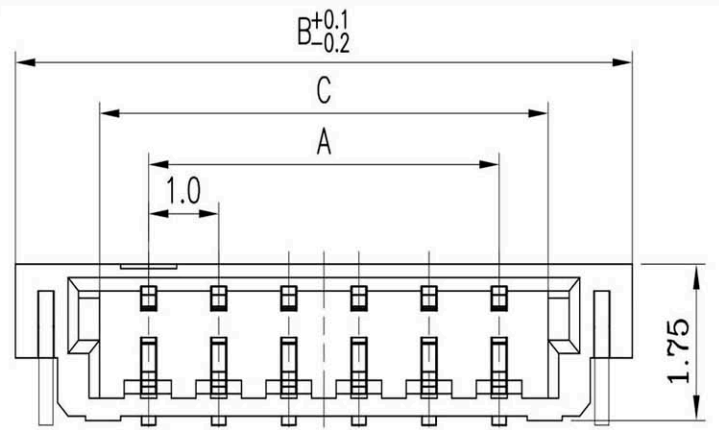

P.C. BOARD LAYOUT

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 DATE 制表日 2022/3/3	SCALE 比例 UNIT 單位 PAGE 張數 1 OF 1	TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 5° SIZE 紙張尺寸 A4 REV. 版本 A	PART NAME 品名 SHL 1.0MM WAFER SINGLE ROW 1X??PIN SMT RIGHT ANGLE TYPE GOLD FLASH PLATING BLACK COLOR(V0) REEL PACKING ROHS PART NO. 料號 W9017-XXPSBGBRR

1 2 3 4 5 6 7 8