



Specifications

Electrical
 Voltage Rating: 50V(AC)
 Current Rating: 1.0A
 Contact Resistance: 20mΩ max.
 Dielectric Withstanding Voltage: 500V AC/1min.
 Insulation Resistance: 100M Ω min.

Material and Finish
 Circuits: 2~16P&20p
 Insulator: Nylon 6T, UL94V-0
 Color: Natural
 Contact: Phosphor Bronze, Tin-Plated
 Plating: Tin-plated or Gold-plated
 Temperature Range: -40°C~+105°C

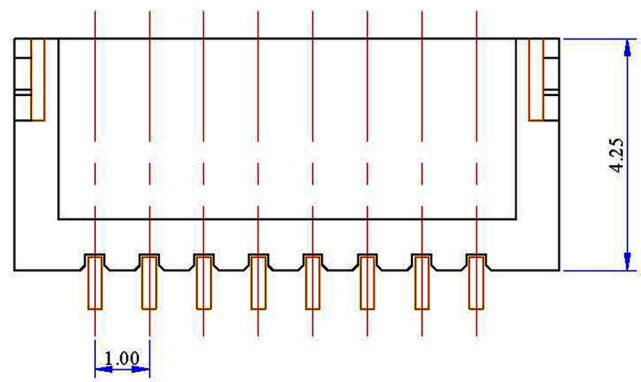

Poles	Dimension mm (in.)	
	A	B
2	1.0(0.039)	4.0(0.157)
3	2.0(0.079)	5.0(0.197)
4	3.0(0.118)	6.0(0.236)
5	4.0(0.157)	7.0(0.276)
6	5.0(0.197)	8.0(0.315)
7	6.0(0.236)	9.0(0.354)
8	7.0(0.276)	10.0(0.394)
9	8.0(0.315)	11.0(0.433)
10	9.0(0.354)	12.0(0.472)
11	10.0(0.394)	13.0(0.512)
12	11.0(0.433)	14.0(0.551)
13	12.0(0.472)	15.0(0.591)
14	13.0(0.512)	16.0(0.630)
15	14.0(0.551)	17.0(0.669)
16	15.0(0.590)	18.0(0.708)
20	19.0(0.748)	22.0(0.866)

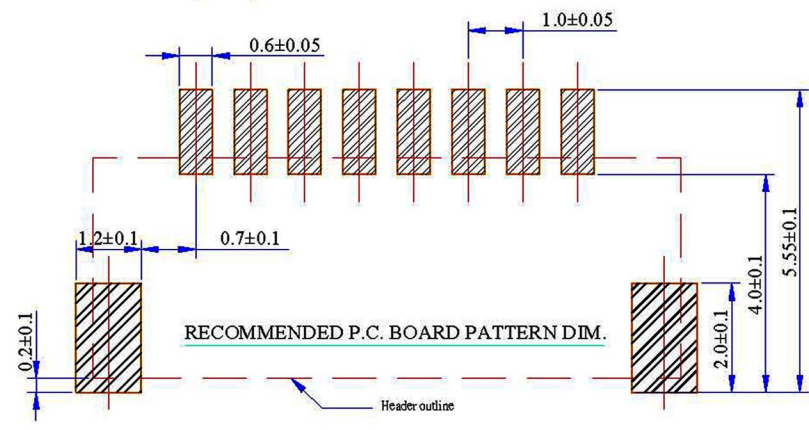

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	APPD. 核准 DWG. 製圖 DATE 制表日 2009/12/24	Hedy 2009/12/24
PART NAME 品名 SH1.0mm WAFER 1XXXXP SMT SIDE ENTRY TYPE WHITE COLOR 1K/REEL PACKING ROHS LOW-LEAD		PART NO. 料號 W9110-XXPBXWRSR