



RECOMMENDED P.C.BOARD HOLE DIMM.

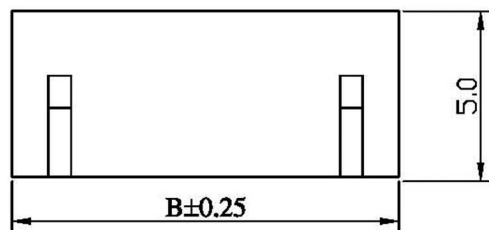

SPECIFICATIONS

Current rating : 1A AC,DC
 Voltage rating : 100V AC,DC
 Temperature range : -25°C to +85 °C
 Contact resistance : 20m Ω Max.
 Insulation resistance : 500M Ω Min.
 Withstanding voltage : 500V AC/minute
 Material : Pin-Brass/Tin-plated
 Base-Nylon 9T UL94V-0

Ordering Information & Dimensions

Poles	Dimension (mm)		
	A	B	C
2	1.50	6.00	3.60
3	3.00	7.50	5.10
4	4.50	9.00	6.60
5	6.00	10.50	8.10
6	7.50	12.00	9.60
7	9.00	13.50	11.10
8	10.50	15.00	12.60
9	12.00	16.50	14.10
10	13.50	18.00	15.60
12	16.50	21.00	18.60

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准 Yumi
 DWG.
製圖 Helen
 DATE 制表日
2022/12/14

SCALE
比例 參考
 UNIT
單位 M M
 PAGE
張數 1 OF 1

TOLERANCE
容許公差
 $XX \pm 0.2$
 $XX \pm 0.3$
 ANG. ±
 SIZE.
紙張尺寸 A 4
 REV.
版次 C

PART NAME 品名
 1.50mm WAFER SMT STRAIGHT
 1XXXP IVORY COLOR ROHS LOW-LEAD
 PART NO.
 料號 W1600-XXPAXXI0R