



RECOMMENDED P.C.BOARD HOLE DIMM.

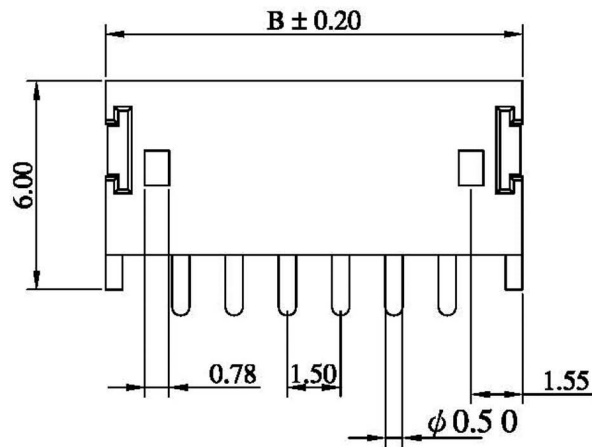

SPECIFICATIONS

Current rating : 1A AC,DC
 Voltage rating : 100V AC,DC
 Temperature range : -25°C to +85 °C
 Contact resistance : 20mΩ Max.
 Insulation resistance : 500MΩ Min.
 Withstanding voltage : 500V AC/minute
 Material : Pin-Brass/Tin-plated
 Base-Nylon 9T, UL94V-0

Ordering Information & Dimensions

Poles	Dimension (mm)		
	A	B	C
2	1.50	6.00	3.60
3	3.00	7.50	5.10
4	4.50	9.00	6.60
5	6.00	10.50	8.10
6	7.50	12.00	9.60
7	9.00	13.50	11.10
8	10.50	15.00	12.60
9	12.00	16.50	14.10
10	13.50	18.00	15.60
12	16.50	21.00	18.60

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Yumi	SCALE 比例 參考	TOLERANCE 容許公差 XX ± 0.2 XX ± 0.3 ANG. ±	PART NAME 品名 1.50mm WAFER 1XXXP SMT TYPE RIGHT ANGLE (SIDE ENTRY) IVORY COLOR ROHS LOW-LEAD
DWG. 製圖 Helen	UNIT 單位 MM	SIZE. 紙張尺寸 A4	PART NO. 料號 W1600-XXPBXXI0R
DATE 制表日 2022/12/14	PAGE 張數 1 OF 1	REV. 版本 C	